



**Positive Indent Low Stress Punches** 

For use on brittle material to avoid damage.





Set Description	Number of Pieces	Font Size (mm)		Order Code KEN-560	Price/1 RND
Letter A - Z Plus &	27	3.0 6.0	73 78	-7300K -7600K	914.00 1266.00
Figure 0 - 9	9	3.0 6.0	71 75	-5300K -5600K	351.00 486.00

### 6 Wheel Number Punch

Ideal for rapid precise marking of six figure numbers in one impact. Manufactured from nickel- plated carbon steel, knurled handle for extra grip.



Font	Overall	Weight	Order Code	Price/1
Size (mm)	Length	each	<b>KEN-560</b>	RND
3.0	130	640g	-9000K	

### Letter & Number Stamps

Standard quality, with strength up to 800N/mm<sup>2</sup>. Hardness at the engraving: 58 - 60HRC. Type of characters according to DIN 1451.



Set Description	Number of Pieces	Font Size	Weight each	Order Code SEN-560	Price/1 RND
		3.0	550g	-1300K	106.20
		4.0	950g	-1400K	107.30
Numbers	9 -	5.0	1350g	-1500K	147.80
0 - 9	9	6.0	1350g	-1600K	163.20
		8.0	200g	-1800K	164.20
		10.0	200g	-2100K	284.90
		3.0	550g	-3300K	511.30
		4.0	950g	-3400K	316.40
Letters	27	5.0	1350g	-3500K	437.90
A - Z	27 -	6.0	1350g	-3600K	477.80
		8.0	200g	-3800K	479.30
		10.0	200g	-4100K	851.20

Precision manufactured carbon steel alphabetical and numeric-marking stamps with nickel-plated finish. For producing between eight and ten clean uniform impressions in one impact, suitable for all batch and general-purpose marking. Each set contains tweezers to allow easy handling of the individual font blocks. The knurled grip font holder has an impact resistant plastic hand shield to redirect the force of miss-hits safely away from your hand preventing injury. Hexagon wrench for operating the font retaining screw and 100 characters and spaces according to the most common use. See diagram for exact character content. Supplied complete in a foam-lined plastic carry case.

#### **Individual Nickel-Plated Carbon Steel Fonts**

For use with holder shown below. 3mm character height.

Character	Order Code <b>KEN-560</b>	Price/1 RND
	Alphabetical	
Α	-8200K	40.80
В	-8210K	40.80
С	-8220K	40.80
D	-8230K	40.80
E	-8240K	40.80
F	-8250K	40.80
G	-8260K	40.80
Н	-8270K	40.80
I	-8280K	40.80
J	-8290K	40.80
K	-8300K	40.80
L	-8310K	40.80
M	-8320K	40.80
N	-8330K	40.80
0	-8340K	40.80
P	-8350K	40.80
Q	-8360K	40.80
R	-8370K	32.30
S	-8380K	40.80
T	-8390K	40.80
U	-8400K	40.80
V	-8410K	40.80
W	-8420K	40.80
X	-8430K	40.80
Y	-8440K	40.80
Z	-8450K	40.80
Space	-8500K	40.80
	Numeric	
0	-8100K	40.80
1	-8110K	40.80
2	-8120K	40.80
3	-8130K	40.80
4	-8140K	40.80
5	-8150K	40.80
6	-8160K	40.80
7	-8170K	40.80
8	-8180K	40.80
9	-8190K	40.80

	Character set includes:																		
A	A	A	В	В	C	С	D	D	E	E	E	E	F	F	G	G	Н	Н	1
1	1	J	J	K	K	L	L	L	M	M	N	N	N	0	0	0	P	P	Q
R	R	R	s	s	s	Т	T	U	U	U	٧	٧	W	X	X	Y	z	1	1
-	-				,	1	1	1	1	2	2	2	2	3	3	3	3	4	4
4	4	5	5	5	6	6	6	7	7	7	8	8	8	9	9	9	0	0	0
	Plus 20 spaces																		



Set		Individual I	Holder			
Number of Pieces	Font Size	Weight each	Order Code <b>KEN-560</b>	Price/1 RND	Overall Length	Weight each
100	3.0mm	1.50kg	-9300K	6872.80	125mm	600g

#### Power Punch Kit

Provides smooth piercing with minimum effort. For use on steel, aluminium, plastic and leather. Adjustable depth gauge.

Suitable for materials up to 14 gauge.

Die and punch sizes: 2.38, 3.18, 3.97, 4.76, 5.56, 6.35, and 7.14mm.



Model	Throat	Weight	Order Code	Price/1
Number	Capacity	each	<b>KEN-560</b>	RND
PPK2812	200mm (8")	1.60kg	-7800K	753.00

#### **Spares**

Size (mm)	Order Code KEN-560 Dies	Price/1 RND	Order Code KEN-560 Punches	Price/1 RND
2.38 (3/32")	-7910K	37.40	-7980K	37.40
3.18 (1/8")	-7920K	37.40	-7990K	37.40
3.97 (5/32")	-7930K	37.40	-8000K	37.40
4.76 (3/16")	- <b>7940K</b>	37.40	-8010K	37.40
5.56 (7/32")	-7950K	37.40	-8020K	37.40
6.35 (1/4")	-7960K	37.40	-8030K	37.40
7.14 ( <sup>9</sup> / <sub>32</sub> ")	-7970K	37.40	-8040K	37.40

#### Stencil Sets

Stencils manufactured from hard-wearing quality steel with precision cut letters for a clean sharp image. Suitable for use with all paints and marking compounds for marking packing cases with shipping details, loading/work bay walls for identification, car park spaces and countless other applications.

#### 10-Piece Numbered Sets 0 - 9





Character Height	Weight each	Order Code <b>KEN-561</b>	Price/1 RND
40mm	80g	-0400K	121.80
50mm	110g	-0500K	152.50
60mm	130g	-0600K	199.40
70mm	170g	-0700K	200.00
80mm	200g	-0800K	219.80
_100mm		-1000K	335.00
150mm	1000g	-1500K	972.40
200mm	1400g	-2000K	1283.40



Order Code KEN-560

-9500K

26-Piece Letter Sets A - Z


Character Height		Order Code KEN-561	Price/1 RND
40mm		-2400K	121.80
50mm	250g	-2500K	152.50
60mm	300g	-2600K	199.40
70mm	350g	-2700K	200.00
80mm	440g	-2800K	219.80
100mm	600g	-3100K	335.00
150mm	2400g	-3150K	912.40
200mm	4500g	-3200K	1283.40

HAND TOOLS

Price/1 RND

2227.10

Produces strong, vibration proof joints effortlessly. Replaces screws, bolts, ordinary rivets, brazing, soldering and welding. Moulded comfort grip. Long nose design, ideal for use in recessed areas. With enamelled steel body with storage for four nozzles and quick change wrench.

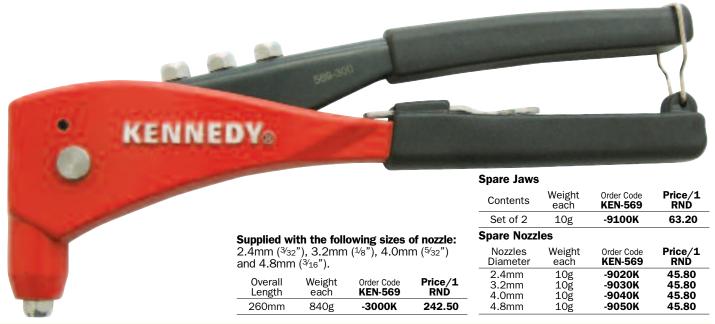

#### Rivet Nut Inserter

#### **Model RNI410**

TOOLS

HAND

This sturdy professional quality tool has been designed for the insertion of rivet nuts into sheet metal. It has a cast body with a corrosion-resistant powder-coated finish, heavy-duty steel levers with soft grips for user comfort and a knurled adjustment ring for material thickness setting.





Nozzles	Order Code	Price/1
Supplied	KEN-569	RND
M4, 5, 6, 8 & 10	-3080K	3352.70

#### **Spare Nose Piece Sets**

	Contents	Order Code <b>KEN-569</b>	Price/1 RND
_	M40	-9300K	239.20
	M5	-9310K	239.20
	M60	-9320K	239.20
_	M80	-9330K	239.20
	M10	-9340K	239.20

## Rivet Nut

Attachment Attachment		
his attachment has been specifically designed to a sert rivet nuts into sheet metal. Rapid loading of a serts improves productivity. 1/4" hex drive makes it uitable for use with cordless, electric or air crewdrivers. Robust moulded polycarbonate body with uted sides for extra grip. 26mm hexagonal moulding for ripping with a suitable wrench. Complete with a set of a set of a set of threaded mandels, M4, M5 and M6.	KOBE	

			Price/1 RND	Order Code KBE-280	Weight each
Weight Order Code <b>Price/1</b> each <b>KBE-280 RND</b>	Weight Order Code <b>Price/1</b> each <b>KBE-280 RND</b>	Weight Order Code <b>Price/1</b> each <b>KBE-280 RND</b>	Weight Order Code each <b>KBE-280</b>	Weight each	


Body	Weight	Order Code	Price/1
Length	each	KBE-280	RND
125mm	245g	-0100A	750.90





#### Industrial **Lazy Tong Riveter**

The powerful one-handed compression action and all steel construction make this ideal for rapid, repetitive rivetting applications. The contoured handle provides a comfortable grip for the user and reduces fatigue. In-handle storage of different nozzle sizes ensures rapid nozzle changing when required.


Length closed: 300mm. Extended: 825mm.










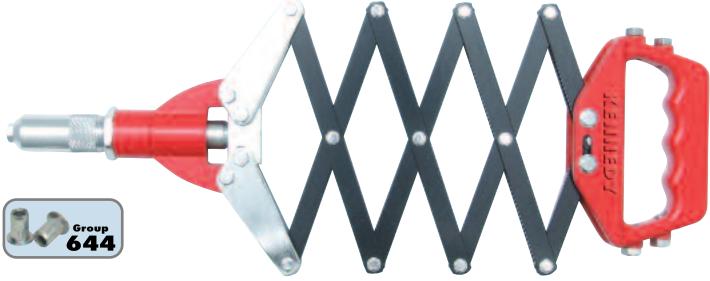











Order Code **KEN-569** 

Price/1 RND

Contents

Set of 3	TOB	-9120K	63.20
Replacement Nozzles			
Contents	Weight each	Order Code <b>KEN-569</b>	Price/1 RND
3.2mm	10g	-9070K	45.80
4.0mm	10g	-9080K	45.80
4.8mm	10g	-9090K	45.80
6.0mm	10g	-9092K	45.80
6.4mm	10g	-9094K	45.80

Weight each

### Lazy Tong Riveter

Nozzles	Weight	Order Code	Price/1
Supplied	each	KEN-569	RND
3.2, 4, 4.8. 6.0 & 6.4mm	2.30kg	-3020K	1030.80

#### Long Arm Riveter

High leverage for effortless setting of rivets. Comfortable rubber hand grips. effortless setting of rivets. Complete with 'catcher'.

#### Supplied with the following sizes of nozzle:

3.2mm ( $\sqrt[4]{8}$ "), 4.0mm ( $\sqrt[5]{32}$ "), 4.8mm ( $\sqrt[3]{16}$ "), 5.5mm ( $\sqrt[7]{32}$ ") and 6.4mm ( $\sqrt[4]{4}$ ").



Overall	Weight	Order Code	Price/1
Length	each	<b>KEN-569</b>	RND
530mm	1.50kg	-3040K	1030.80

Chrome vanadium steel blades with magnetic tips. Fitted with a unique dual grip triangular handle which has been designed for improved user comfort,



allowing more torque to be applied. With convenient hanging hole in the handle for storage.

#### Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 screwdriver would be suitable for most applications. DIN ISO 8764.


$\mathbb{P}$				
Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 RND
No.0	75mm	25g	-5110K	31.60
No.1	75mm	55g	-5120K	40.30
No.1	250mm	80g	-4490K	63.60
No.2	Stubby	40g	-5180K	46.40
No.2	100mm	85g	-5140K	46.60
No.2	250mm	120g	-4500K	73.60
No.3	150mm	145g	-5150K	83.00

-5160K

119.30

#### 200mm Flared Tip, Round Blade

To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head. **DIN ISO 2380.** 



Tip Size	Blade Length	Weight each	Order Code <b>KEN-572</b>	Price/1 RND
3.2mm	75mm	25g	-5425K	31.90
6.5mm	Stubby	40g	-5420K	38.90
6.5mm	100mm	85g	-5430K	59.10
6.5mm	150mm	100g	-5440K	68.50
8.0mm	200mm	170g	-5450K	93.50
10.0mm	250mm	240g	-5460K	102.10

#### PZ/Supadriv

(ક્ષેટ્ર) 🚅

PZ/Supadriv has extra 'cutaways' to help drive the screw. Favoured by the construction and joinery trade. **DIN ISO 8764.** 

				No. of Concession, Name of Street, or other Persons, Name of Street, or ot
Tim	Dlada	\\\aide	0	Duine /1
Tip	Blade	Weight	Order Code	Price/1
Size	Length	each	KEN-572	RND
No.2	Stubby	45g	-5280K	54.00
No.0	75mm	25g	-5290K	33.60
No.1	75mm	55g	-5300K	43.00
No.1	250mm	80g	-5360K	84.70
No.2	100mm	85g	-5310K	55.30
No.2	250mm	120g	-5370K	83.00
No.3	150mm	145g	-5320K	88.80
No.4	200mm	210g	-5340K	133.60

#### Flared Tip, Square Blade

Square bladed screwdrivers can be gripped in a spanner or locking wrench to allow greater torque to be applied from the side rather than from directly above the screwdriver. **DIN ISO 2380.** 



Tip Size	Blade Length	Weight each	Order Code <b>KEN-572</b>	Price/1 RND
6.5mm	100mm	90g	-5500K	73.40
6.5mm	150mm	105g	-55 <b>1</b> 0K	77.30
8.0mm	200mm	185g	-5520K	102.90
10.0mm	250mm	275g	-5530K	143.60
10.0mm	300mm	305g	-5550K	155.90

#### **Parallel Tip**

To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head. DIN ISO 2380.

Tip Size	Blade Length	Weight each	Order Code <b>KEN-572</b>	Price/1 RND
3.2mm	100mm	25g	-5650K	40.80
3.2mm	150mm	30g	-5660K	44.90
4.0mm	300mm	50g	-5400K	59.90
5.5mm	75mm	55g	-5710K	43.00
5.5mm	100mm	60g	-5720K	48.50
_5.5mm	150mm	65g	-5730K	51.70
5.5mm	200mm	75g	-5740K	54.80
5.5mm	250mm	80g	-5750K	64.00
5.5mm	260mm	81g	-5404K	63.10

TX head screws are used predominantly for engineering and automotive applications. The design of the screw allows high torque levels to be applied without the driver slipping potentially damaging the components.

(	③ 🔳		_		
	Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 RND
-	T6	75mm	30g	-5260K	38.90
	T7	75mm	30g	-5262K	38.90
١.	T8	75mm	30g	-5264K	40.80
	T9	75mm	30g	-5266K	40.80
	T10	100mm	60g	-5268K	49.30
	T15	100mm	60g	-5270K	49.30
	T20	100mm	25g	-5272K	49.30
	T25	100mm	85g	-5274K	59.10
	T30	100mm	85g	-5276K	59.10

#### 'Hi-Grip' Pound Thru' Screwdrivers

Through blade screwdriver with chrome vanadium

steel blades and striking heads, suitable for striking with a hammer to free up seized screws. Fully hardened magnetic tips. Comfortable moulded grip. Hexagon blades

DIN ISO 2380/8764.





#### Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 screwdriver would be suitable for most applications. DIN ISO 8764.



Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 RND
No.1	75mm	100g	-3610K	55.20
No.2	100mm	150g	-3620K	77.50
No.3	150mm	220g	-3630K	93.70

#### Flared Tip

Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head. Hexagon blades. **DIN ISO 2380.** 





### Pound Thru' Set



Price/1


Number

Chrome vanadium steel blades with magnetic tips. Fitted with a unique dual grip triangular handle designed for improved user comfort, allowing more torque to be applied. Manufactured with hanging hole in the handle for storage. DIN ISO 2380/8764.

6-Piece Set Contents (mm):

**Crosspoint:** No.1 x 75, No.2 x 100. Flared: 6.3 x 100, 8.0 x 200. Parallel: 5.0 x 75, 5.0 x 150.

6 **PIECES** 



Parallel: 5.0 x 100, 5.0 x 200.

6 **PIECES**  8-Piece Set Contents (mm):

**Crosspoint:** No.1 x 75, No.2 x 100, No.3 x 150.

**PZ:** No.2 x 100.

**Flared:** 6.3 x 150, 9.5 x 250. **Parallel:** 5.0 x 100, 5.0 x 200.

8 **PIECES** 



Number Weight of Pieces each		Order Code KEN-572	Price/1 RND
6	810g	-5970K	427.10

8-Piece Set Contents (mm):

**Crosspoint:** No.1 x 75, No.2 x 100.

**PZ:** No.2 x 100.

**Flared:** 6.3 stubby, 6.3 x 100, 8.0 x 200.

Parallel: 5.0 x 75, 5.0 x 150.

8 **PIECES** 



Number Weight of Pieces each		Order Code KEN-572	Price/1 RND
8	1010g	-6000K	559.80

12-Piece Set Contents (mm):

**Crosspoint:** No.2 x stubby, No.1 x 75,

No.2 x 100, No.3 x 150. PZ: No.2 x 100, No.3 x 150.

**Flared:** 6.3 x stubby, 6.3 x 150, 8.0 x 200. **Parallel:** 5.0 x 75, 5.0 x 150, 5.0 x 250.





Number Weight of Pieces each		Order Code KEN-572	Price/1 RND
6	925g	-5975K	453.90

8-Piece Set Contents (mm):

**Crosspoint:** No.2 x stubby, No.2 x 100. **PZ:** No.1 x 75, No.2 x 100, No.3 x 150, **Flared:** 6.3 x 150, 8.0 x 200.

Parallel: 5.0 x 150.





Number Weight of Pieces each		Order Code KEN-572	Price/1 RND
8	1105g	-6010K	602.50

12-Piece Set Contents (mm):

**Crosspoint:** No.1 x 75, No.2 x stubby, No.2 x 100.

**Flared:** 6.3 x stubby, 6.3 x 100, 6.3 x 150,

8.0 x 200, 9.5 x 250.

Parallel: 5.0 x 75, 5.0 x 100,

5.0 x 200, 5.0 x 250.



Number of Pieces	Weight	Order Code	Price/1
	each	KEN-572	RND
12	1581g	-6040K	823.50



#### 1280g -5990K 669.80

12-Piece Set Contents (mm):

**Crosspoint:** No.2 x stubby, No.2 x 100,

No.3 x 150.

**PZ:** No.1 x 75 No.2 x 100 No.3 x 150. **Flared:** 6.3 x stubby, 6.3 x 150, 9.5 x 250. **Parallel:** 5.0 x 100, 5.0 x 200, 5.0 x 250.



Number of Pieces	Weight each	Order Code KEN-572	Price/1 RND
12	1660g	-6020K	815.80

9-Piece TX Set Contents (mm): **TX:** T6 x 75, T7 x 75, T8 x 75, T9 x 75, T10 x 100, T15 x 100 T20 x 100, T25 x 100, T30 x 100.

**PIECES** 



Number of Pieces	Weight each	Order Code KEN-572	Price/1 RND
Q	790d	-eueuk	677 30

Page **485** 



With a traditional 'fluted' design handle. High quality steel blades with satin finish. Magnetic tips, hardened and ground to prolong tool life. This range offers the widest choice of blade selection and blade length. The high impact plastic handles are acid and oil resistant.

A comprehensive selection to meet the demands of modern industry.

DIN ISO 2380/8764.

#### Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications. **DIN ISO 8764.** 



Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 RND
No.0	75	25g	-1000K	19.20
No.1	75	55g	-1010K	27.00
No.2	100	80g	-1020K	33.30
No.3	150	135g	-1030K	53.20
No.4	200	225g	-1040K	80.10
No.1	Stubby	60g	-1210K	27.80
No.2	Stubby	60g	-1220K	29.00

#### PZ/Supadriv

PZ/Supadriv has extra 'cutaways' to help drive the screw. Favoured by the construction and joinery trade. **DIN ISO 8764.** 



#### Flared Tip, Round Blade Same as the parallel tip. DIN ISO 2380.



KENNEDY

Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 RND
6.5mm	Stubby	60g	-3020K	26.60
6.5mm	100	80g	-3040K	29.70
6.5mm	150	90g	-3060K	34.80
8.0mm	200	155g	-3080K	57.70
10.0mm	250	250g	-3100K	88.10
10.0mm	300	280g	-3120K	94.30

#### **Parallel Tip**

HAND TOOLS

Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head. **DIN ISO 2380.** 

$\ominus$			and in column 2 is not	AND DESCRIPTION OF THE PARTY OF
Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 RND
3.2mm	50	25g	-4520K	18.40
3.2mm	75	25g	-4530K	18.80
3.2mm	100	25g	-4540K	19.80
3.2mm	150	30g	-4560K	23.20
5.5mm	75	55g	-5030K	29.20

Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 RND
5.5mm	100	55g	-5040K	32.70
5.5mm	150	65g	-5060K	32.70
5.5mm	200	70g	-5080K	38.60
5.5mm	250	80g	-5100K	38.60

#### Flared Tip, Square Blade

Set Contents (mm):

Square bladed screwdrivers can be gripped in a spanner or locking wrench to allow greater torque to be applied from the side rather than from directly above the screwdriver.

	N ISO 23			
Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 RND
6.5mm	100	85g	-4040K	37.40
6.5mm	150	95g	-4060K	41.10
8.0mm	200	175g	-4080K	59.90
10 0mm	250	285g	-4100K	89.80

#### Set Contents (mm):



### Set Contents (mm):

			75, No. 150, No. 75, No. 150. No. No.	0 x 75, 1 stubby, 1 x 75, 2 stubby, 2 x 100, 3 x 150, 4 x 200.
Number Weight Order Code <b>Price/1</b>	Number	Weight	Order Code	Price/1





Weight

1.0kg

**KEN-572** 

-9900K

Price/1

RNĎ

434.90

of Pieces

each

1.39kg

Number

of Pieces

11

RND

730.90

**KEN-572** 

-9920K

Designed for maximum grip under load application. The red moulded cushion grip gives optimum operator comfort. Ideal for assembly work. Tough alloy steel blades with satin finish. Magnetic tips, hardened and ground to prolong tool life. DIN ISO 2380/8764.

\*Flat blades have hexagon bolster to allow higher torque to be applied via a spanner.

#### Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications. DIN ISO 8764.



Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 RND
No.0	75mm	35g	-0000K	27.80
No.1	75mm	75g	-0010K	34.80
No.2	100mm	110g	-0020K	43.50
No.3	150mm	170g	-0030K	57.70
No.2	Stubby	65g	-0120K	31.60

#### TX

TX head screws are used predominantly for engineering and automotive applications. The design of the screw allows high torque levels to be applied without the driver slipping potentially damaging the components.



Tip Size	Blade Length	Weight each	Order Code <b>KEN-572</b>	Price/1 RND
T6	75mm	40g	-6060K	31.90
T7	75mm	40g	-6070K	31.90
T8	75mm	40g	-6080K	31.90
T9	75mm	40g	-6090K	31.90
T10	75mm	40g	-6100K	31.90
T15	100mm	80g	-6150K	35.70
T20	100mm	800g	-6200K	35.70
T25	100mm	110g	-6250K	40.50
T30	100mm	110g	-6300K	43.00

#### PZ/Supadriv

PZ/Supadriv has extra 'cutaways' to help drive the screw. Favoured by the construction and joinery trade. DIN ISO 8764.



Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 RND
No.1	75mm	75g	-0210K	34.30
No.2	100mm	110g	-0220K	42.10
No.3	150mm	170g	-0230K	59.70

#### Set Contents (mm):

Supplied in clear plastic wallet.

No.1 x 75, No.2 stubby, FLARED POINT No.2 x 100 No.3 x 150.

6.5 stubby, **PIECES** 6.5 x 100, 6.5 x 150 10.0x250.

No.3 x 150.

12

**PIECES** 

### Set Contents (mm):

Supplied in clear plastic wallet. 6.5 stubby, No.2 x 100

6.5 x 100, 6.5 x 150, 8.0x200 and 10.0x250. No.1 x 75, No.2 x 100 No.3 x 150. No.1 x 75, No.2 stubby.

Number of Pieces	Weight	Order Code	Price/1
	each	KEN-572	RND
8	1.05kg	-9870K	484.50
12	1.58kg	-0490K	675.40

#### Flared Tip, Round Blade


Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head. DIN ISO 2380.

$\bigoplus$				
Tip Size	Blade Length	Weight each	Order Code <b>KEN-572</b>	Price/1 RND
6.5mm	Stubby	65g	-0320K	32.10
6.5mm	100mm	115g	-0340K	57.00
6.5mm	150mm	125g	-0360K	47.10
8.0mm	200mm	195g	-0380K	69.80
10.0mm	250mm	265g	-0400K	98.80

#### Set Contents (mm):

Supplied in clear plastic wallet.

T6 x 75, T7 x 75, T8 x 75, T9 x 75, T10 x 75, T15 x 100, T20 x 100, T25 x 100, T27 x 100,



#### 11 830g -6450K 406.80

#### Cabinet Screwdrivers

Traditional design cabinet screwdrivers with matt grey high impact plastic handles to ensure a firm yet comfortable grip allowing constant use, giving maximum torque. Chrome alloy steel blades with satin finish. Magnetic tips, hardened and ground to prolong tool life.

DIN ISO 2380/8764.

#### Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 screwdriver would be suitable for most applications. DIN ISO 8764.



-7030K

59.70

#### PZ/Supadriv

PZ/Supadriv has extra 'cutaways' to help drive the screw. Favoured by the construction and joinery trade. DIN ISO 8764.



#### Flared Tip, Round Blade

Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head.

**DIN ISO 2380.** 





$\ominus$				
Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 RND
6.5mm	Stubby	55g	-7320K	32.30

Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 RND
6.5mm	Stubby	55g	-7320K	32.30
5.5mm	75mm	65g	-7330K	35.50
6.5mm	100mm	90g	-7340K	39.80
6.5mm	150mm	105g	-7360K	51.90
8.0mm	200mm	185g	-7380K	62.60
10.0mm	250mm	250g	-7400K	71.80

#### 12-Piece Set Contents (mm):

Supplied in clear plastic wallet.





No.1 x 75, No.2 x 100 and No.3 x 150.



8	9	*	9	9	7
	1			I	
1					
	•	ă (	<b>b</b> (		

Page 487

Number of Pieces	Weight	Order Code	Price/1
	each	KEN-572	RND
12	1 /15kg	-7490K	538 50

**PIECES** 



#### **Parallel Tip**



Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head.

Size	Weight each	Order Code KEN-572	Price/1 RND	
4.8 x 100mm	60g	-7840K	36.10	_
4.8 x 200mm	75g	-7880K	43.20	

#### Offset Double-Ended Screwdrivers

Designed to give access into otherwise restricted areas. A versatile tool suitable for use in many applications.



Size	Weight each	Order Code KEN-572	Price/1 RND
○ No.1 x → ¾16"	20g	-4210K	21.20
○ No.2 x → ½"	30g	-4220K	28.80
○ No.3 x → 5/16"	80g	-4230K	35.70
Set - 1 each of above	140g	-4250K	120.50

#### Mini Screwdriver

Extra light duty screwdriver with magnetic tips. Designed for use on terminals and other electrical work.

N.B. Do not use on live circuits.

		-	
Size	Weight each	Order Code KEN-572	Price/1 RND
○ No.0 x 65	10g	-5190K	12.80
	10g	-5220K	11.40
→ 3.0mm x 100	10g	-5240K	13.00
Set - 1 each of above	35g	-5250K	62.30

#### Mechanic's YAMOTO Screwdrivers



8.3mm x 200m 572-088

Featuring a classic slimline design favoured by the automotive industry. Black high impact plastic handles. Chrome finish alloy steel blades with satin finish. Magnetic tips, hardened and ground to prolong tool life. Flat blades have hexagon bolster to allow extra torque to be applied using a spanner.

### Crosspoint





Tip Size	Blade Length	Weight each	Order Code YMT-572	Price/1 RND
No.1	75mm	45g	-0510K	26.10
No.2	100mm	75g	-0520K	32.60
No.3	150mm	130g	-0530K	48.50
No.2	Stubby	50g	-0620K	23.30

#### **Parallel Tip**





Tip Size	Blade Length	Weight each	Order Code YMT-572	Price/1 RND
5.5mm	300mm 250mm	71g 81g	-0320K -0340K	170.80 125.80
	425mm	121g	-0350K	170.80
3 Piec	e Set	319g	-0400K	467.40

#### 12-Piece Set Contents (mm):

Supplied in clear plastic wallet.

6.3 stubby, 6.3 x 100, 6.3 x 150, 8.3 x 200 and 9.5 x 250.





Number	Weight	Order Code	Price/1
of Pieces	each	YMT-572	RND
12	1.21kg	-0990K	

**PIECES** 

#### PZ/Supadriv



Tip Size	Blade Length	Weight each	Order Code YMT-572	Price/1 RND
No.1	75mm	45g	-0710K	25.10
No.2	100mm	85g	-0720K	32.60
No.3	150mm	150g	-0730K	46.40

#### Flared Tip, Round Blade

Page **488** 



Tip Size	Blade Length	Weight each	Order Code YMT-572	Price/1 RND
6.5mm	Stubby	50g	-0820K	23.30
6.5mm	100mm	80g	-0840K	32.60
6.5mm	150mm	90g	-0860K	44.70
8.0mm	200mm	155g	-0880K	70.00
10.0mm	250mm	250g	-0900K	81.40

igtharpoons				
Tip Size	Blade Length	Weight each	Order Code YMT-572	Price/1 RND
4.0mm	300mm	71g	-0320K	170.80

#### 8-Piece Set Contents (mm): Supplied in clear plastic wallet.

6.3 stubby, 6.3 x 100,

6.3 x 150, 8.3 x 200 and 9.5 x 250.

No.1 x 75, No.2 x 100 and No.3 x 150.

> 8 **PIECES**



## Screwdriver

#### **Combined & Fluted Handle** Screwdriver Set

Seven 'volt-tested' screwdrivers plus five noninsulated engineer's and electrician's screwdrivers.

Supplied in clear plastic wallet.

12-Piece Set Contents (mm): Non-Insulated

6.3 stubby. FLARED 4.8 x 75,

4.8 x 150 and PARALLEL 4.8 x 250. **Volt-Tested** 

2.5 x 85, 4.0 x 100, 5.5 x 125 and 6.5 x 150. No.2 x  $\frac{1}{4}$ "

> No.0 x 75, No.1 x 100, No.2 x 100.

Number Weight of Pieces each 745g

Order Code KEN-572 -5920K

RND 444.30

12

**PIECES** 

# slotted offset. Price/1

### Screwdriver YAMOTO

#### Tri-Line™

Ergonomically designed handles which are dual material and three-sided for improved torque and reduced fatigue. Chrome vanadium steel blades with magnetic tips and a hanging hole in handle. The handles have identification on the end for easy location.

#### 6-Piece Set Contents (mm):

No. 1 x 75 No. 2 x 100.


5 x 150.

6 x 150, 8 x 200.



Price/1 Weight Number Order Code RNĎ of Pieces each YMT-572 6 715g -2060K 189.70

#### 8-Piece Set Contents (mm):



6 x 150, 8 x 200, 6 x stubby.



Number Weight of Pieces each 8 875g

YMT-572 -2080K

Price/1 RNĎ 236.00 Chrome vanadium steel blades with

VATOR Screwdriver Sets

magnetic tips. Acrylic handles.

#### 8-Piece Set Contents (mm):

6 stubby, 3 x 100 and 8 x 200.

3.2 x 75 and PARALLEL 4 x 150.

No.2 stubby, No.1 x 75 and No.2 x 100.

> **ACRYLIC GRIP HANDLES**

8 **PIECES** 

Price/1 Number Weight Order Code SEN-572 RNĎ of Pieces each 8 690g -9980K 239.20

#### 12-Piece Set Contents (mm):

6 stubby, 6 x 100, 6 x 150, PARALLEL 8 x 200 and 9.5 x 250.

No.2 stubby, No.1 x 75,

No.2 x 100 and No.3 x 150. **HANDLES** 3.2 x 75. 4 x 150 and 4 x 200.

**PIECES** 

Number Weight Order Code Price/1 RNĎ of Pieces SEN-572 each -9990K 358.80 12 1.25kg

#### 8-Piece Set Contents (mm):

6.3 stubby, 6.3 x 100 and 8.0 x 200.

3.0 x 75 and 4.0 x 100.

No.2 stubby, No.1 x 75. and No.2 x 100.

#### **ACRYLIC GRIP HANDLES**

each

580g



of Pieces



Price/1 Order Code SEN-572 RNĎ -9890K 258.50

#### **Dual Grip** Screwdriver Sets

Comfort rubber grip handles with chrome vanadium, chrome-plated

blades and magnetic tips.

#### 5-Piece Set Contents (mm):

 $^{\oplus}$ No.2 x 100, No.3 x 150.

3 x 75 PARALLEL 5 x 150.

8 x 200.


**PIECES** 

**ACRYLIC** 

Number Weight Price/1 Order Code SEN-572 RND of Pieces each 5 600g 117.60

**RUBBER** 

GRIP **HANDLES** 



No.3 x 150. 3 x 75,

5 x 150, PARALLEL 5 x 250.

8 x 200, 6 stubby.

> **RUBBER HANDLES**

#### 10 **PIECES**

Number

of Pieces

Weight SEN-572 each 995g

-9100K 217.20

Price/1

HAND TOOLS

#### 15-Piece Set Contents (mm):

No.1 x 75, No.2 x 100, No.3 x 150, ( No.2 x stubby.

15 **PIECES** 

Weight each SEN-572 1.63kg -9150K

No.1 x 75 No.2 x 100, No.3 x 150. 3 x 75 PARALLEL 5 x 200, 5 x 150 5 x 250. 6 x 150, 8 x 200, 9.5 x 300, 6 x stubby. RUBBER GRIP HANDLES

Number Price/1 of Pieces 334.70

#### 🔽 Insulated Interchangeable Screwdriver Set



Ergonomic insulated full size handle, swivel cap and eight interchangeable drivers supplied in a compact protective pouch with belt loop. 2-in-1 design, use the detachable swivel cap for fast (low torque) driving, or use the full size detachable ergonomic handle for higher torque

**PIECES** 

Safe up to 1000V AC/1500V DC.





0.4 x 2.5 x 100, 0.5 x 3.0 x 100, 0.8 x 4.0 x 100, 1.0 x 5.5 x 100 and 1.2 x 6.5 x 100.



No.0 x 100, No.1 x 100 and No.2 x 100.





Number of Pieces	Weight each	Order Code <b>KEN-572</b>	Price/1 RND
10	365g	-5870K	478.50

#### 1000V Dual Grip VDE Screwdrivers

A fully insulated screwdriver VDE tested up to 1000V. Professional high grip handles, magnetic tips,

chrome vanadium steel blades.




#### Crosspoint

TOOLS

HAND

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications.





#### **Parallel Tip**

Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping and deforming the screw head.

igoplus I		reside		-
Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 RND
2.5mm	75mm	20g	-7940K	45.20
4.0mm	100mm	60g	-7950K	56.70
5.5mm	125mm	75g	-7960K	72.70
6.5mm	150mm	110g	-7970K	79.20

#### Set Contents (mm):

2.5 x 75, 4.0 x 100, 5.5 x 125, PARALLEL 6.5 x 150.



No.0 x 60, No.1 x 80, No.2 x 100.



Number of Pieces	Weight each	Order Code KEN-572	Price/1 RND
7	715ơ	-8000K	396 00

### Electrician's VDE Square Section Handle Screwdrivers

Volt-tested to ensure safety on or near electrical equipment up to 1000V AC or 1500V DC. Insulated blades with magnetic tips. Conform with DIN 7438 and DIN EN 60900.



#### Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications.





Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 RND
No.0	75mm	27g	-5820K	44.00
No.1	100mm	50g	-5830K	56.70
No.2	100mm	80g	-5840K	77.10

#### **Parallel Tip**

Slotted head screws are the most commonly used screw. The tip of the screwdriver should be of the same width as the slot in the screw head and fill it as well, to minimise slipping.



	-			
Tip Size	Blade Length	Weight each	Order Code <b>KEN-572</b>	Price/1 RND
2.5mm	85mm	30g	-5760K	44.00
4.0mm	100mm	45g	-5780K	53.40
5.5mm	125mm	80g	-5790K	77.10
6.5mm	150mm	100g	-5800K	79.40

## Set Contents (mm):

Supplied in clear plastic wallet.

2.5 x 85 4.0 x 100, 5.5 x 125, PARALLEL 6.5 x 150.

No.0 x 75, No.1 x 100, No.2 x 100.



Number of Pieces	Weight each
UI FIECES	eacii
7	495g



Order Code	Price/1	
KEN-572	RND	
-5900K	301.20	

#### Spiral Ratchet Screwdrivers

Polished chrome plated body. 3-way ratchet. Quick release chuck. ABS plastic/lacquered wood handles - 440 mm has fluted handle for extra grip. Chrome vanadium steel bits. Supplied with crosspoint and flared screwdriver bits.



				Bits Sizes	Order Code KEN-572	Price/1 RND
	Size	Order Code	Price/1	5.5mm Flat 7.0mm Flat	-8820K -8840K	8.80 8.80
_		KEN-572	RND	No.1 Crosspoint	-8860K	8.80
_	430mm	-8160K	235.30	No.2 Crosspoint	-8880K	8.80

#### Ratchet Screwdriver

Flared blade. Three-position high performance ratchet. Suitable for rapid tightening or loosening of fastenings in a single action.



NEW

#### Precision Jeweller's Screwdriver Set

#### 12-in-1 Set

This handy jeweller's screwdriver set has six interchangeable 30 x 3.6mm hex. Double ended bits.

Contents: 1.00, 1.50, 2.00, 2.50, 3.00, 3.50, T20, PH000,

PH00, PH0, PH1, PZ0

#### Handle size:

90 x 7.7mm diameter.



RNĎ
175.30

#### **Aluminium-Bronze Spark-Resistant Screwdrivers**

Spark-resistant tools are used to eliminate the chances of accidental fires or explosions in potentially combustible or explosive environments. They resist the sparks that a standard tool could potentially create when striking hard surfaces. The use of spark resistant tools is essential in many industrial applications such as petroleum and chemical manufacturing, spray booth operations, the marine industry, the mining industry, the paper industries, or any location where flammable vapours or combustible residues are present. Aluminium-bronze spark-resistant safety tools are manufactured to 25HRC and offer a breaking strain of 75 - 85kgf/mm<sup>2</sup>.



No.1

No.2

No.3

No.4

Spark-resistant tools must be maintained with special care. Frequent cleaning/re-dressing to remove ferrous particles or contaminants, which may impair the spark resistant properties, is essential.

$\ominus$			KENNEDY 37	.104	-
Tip	Blade	Weight	Order Code	Price/1	
Size	Length	each	KEN-575	RND	
6.0mm	100	60g	-4020K	228.50	
6.0mm	150	80g	-4040K	326.50	
7.5mm	200	120g	-4060K	346.10	
9.0mm	250	180g	-4080K	454.60	
9.0mm	300	200g	-4100K	551.80	
<b>(</b>			KENDER	DY 275.000	
Tip	Blade	Weight	Order Code	Price/1	
Size	Length	each	KEN-575	RND	

55g

60g

100g

75 100

200

#### **SCREWDRIVERS**

#### Yankee Screwdriver Bits

**GROUP** 

Manufactured from high quality chrome vanadium steel. To suit Yankee spiral ratchet screwdrivers.

#### **Light Duty**

To suit Kennedy 300mm Yankee and Stanley® 135B™ Yankee, Handyman 133B Yankee and Handyman 233B Yankee.



#### **Medium Duty**

To suit Kennedy 440mm Yankee and Stanley® 130B™ Yankee.



#### **Heavy Duty**


To suit Kennedy 620mm Yankee and Stanley® 131B<sup>™</sup> Yankee.

Ti	p Size	Weight each	Order Code KEN-572	Price/1 RND
FLARE			-8970K -8980K	13.30 23.90

#### **Precision Screwdrivers**

Nickel chrome molybdenum steel blades, hardened and tempered in choice of crosspoint and parallel tips. Chrome plated, with swivel tops which resist oil and acid. Supplied in plastic cases. Ideal for jewellers and watchmakers.

#### **Parallel**



#### Crosspoint

				-
Туре	Tip Size (mm)		Order Code KEN-572	Price/1 RND
	PHO-4	5g	-9200K	5.40
0	РН0-з	10g	-9210K	11.30
CROSSPOINT	PHO-2	10g	-9220K	7.10
	PH0	15g	-9230K	7.10
	PH1 <sub>-1</sub>	30g	-9250K	7.10

-4520K

4540K

4560K

4580K

185.80

194.80

270.80

#### 🛾 Jeweller's & Watchmaker's Tool Sets Carbon Steel & Alloy Steel Blades



ALLOY STEEL BLADES

A quality range of precision screwdrivers. Combination tool and driver sets have carbon steel blades (tweezers are stainless steel). Driver only sets have nickel chrome molybdenum alloy steel blades. All with attractive chromed handles.

11-Piece Set **Contents:** 

1.0, 1.2, 1.4, 1.8, 2.4 and 3.0mm. PARALLEL



**CARBON STEEL BLADES** 

**CARBON STEEL BLADES** 

**PIECES** 

11

**PIECES** 



PHO-2, PHO and PH1 Fine point awl and tweezers.





Number of Pieces	Weight each	Order Code KEN-572	Price/1 RND
11	220g	-9040K	138.80

#### 11-Piece Set Contents:

HAND TOOLS

1.0, 1.2, 1.4, 1.8, 2.4








Number	Weight	Order Code	Price/1
of Pieces	each	KEN-572	RND
11	210g	-9050K	138.80

#### 11-Piece Set **Contents:**

1.0, 1.2, 1.4, 1.8, 2.4 and 3.0mm.




PHO-2, PHO and PH1, fine point, awl and magnet.



Number of Pieces	Weight each	Order Code <b>KEN-572</b>	Price/1 RND
11	225g	-9060K	138.80

#### 6-Piece Parallel Set **Contents:**

1.0, 1.4, 2.0, 2.4, 3.0 and 3.8mm.




**ALLOY STEEL BLADES** 

PIECES	1		
Number of Pieces	Weight each	Order Code KEN-572	Price/1 RND
6	155g	-9070K	92.50

#### **6-Piece Crosspoint Set** Contents:

PHO-4, PHO-3, PHO-2, PHO, PH1-2 and PH1.



**ALLOY STEEL BLADES** 

ALLOY STEEL BLADES

6
PIECES

	Number of Pieces	Weight each	Order Code KEN-572	Price/1 RND
l	6	140g	-9080K	92.50


6-Piece Parallel & **Crosspoint Set** Contents:

1.4, 2.0, 2.4, and PARALLEL 3.0mm.



6

PHO and PH1.



#### **PIECES** Weight each Number Price/1 RND of Pieces **KEN-572** -9090K 6 155g 92.50

#### 5-Piece Hexagon **Key Driver Set Contents:**

0.9, 1.3, 1.5, 1.5,2.0 2.5mm.



Number Weight of Pieces each		Order Code KEN-572	Price/1 RND
5	130g	-9886K	108.20

#### 5-Piece Hexagon **Ball Key Driver Set Contents:**

1.3, 1.5, 2.0, 2.5 HEXAGON and BALL 3.0mm.

**PIECES** 



ALLOY STEEL BLADES

5
PIECES

Number Weight of Pieces each		Order Code KEN-572	Price/1 RND
5	130g	-9887K	120.50

#### 5-Piece Nut Driver Set **Contents:**

3.0, 3.5 4.0, 4.5 HEXAGON and 5.0mm.



5	
PIECES	


Number Weight of Pieces each		Order Code KEN-572	Price/1 RND
5	170g	-9888K	101.90

Expert quality, hardened and tempered chrome alloy steel blades with black magnetic tips. Fitted with a unique dual grip handle with revolving top designed for added user comfort whilst allowing more torque to be applied.

#### Crosspoint

Crosspoint screws virtually eliminate the screwdriver slippage if the correct size is used. The No.2 driver is suitable for most applications.





20g

#### **Parallel Tip**

Slotted head screws are the most commonly used screw. To safely drive these screws, the tip of the screwdriver should be of the same width as the slot in the screw head.

$\longleftrightarrow$	MAN W			
Tip	Blade	Weight	Order Code	Price/1
Size	Length	each	KEN-572	RND
1.4mm	40	15g	-4300K	23.30
2.0mm	40	15g	-4310K	23.30
2.4mm	40	15g	-4320K	23.30
3.0mm	40	15g	-4330K	23.30
2.4mm	75	15g	-4340K	22.70
3.0mm	75	20g	-4350K	22.70
4.0mm	100	25g	-4360K	24.50

TX head screws are used predominantly for engineering and automotive applications. The design of the screw allows high torque levels to be applied without the driver slipping.

Ů				
Tip Size	Blade Length	Weight each	Order Code KEN-572	Price/1 RND
T6	40	15g	-6470K	20.00
T8	40	15g	-6472K	20.00
T9	50	15g	-6474K	22.90
T10	50	15g	-6476K	20.00
T15	60	20g	-6478K	26.40
T20	60	20g	-6480K	22.90

#### Set


No.1

Alloy steel blades, black oxidised tips, dual material handles for improved grip, revolving end caps. Supplied in leatherette zip around case.

-4410K

24.50

#### **Set Contents:**



100





Number of Pieces	Weight	Order Code	Price/1
	each	KEN-572	RND
6	170g	-6490K	227.50

#### Set

All screwdrivers have 40mm blade length. Complete with protective zip case.

#### **Set Contents:**

1.4, 2.0, 2.4 PARALLEL and 3.0mm.



PH0-3, PH0-2 and PH-0.





Number	Weight	Order Code	Price/1
of Pieces	each	KEN-572	RND
7	165g	-4450K	249.10

#### Set

6

**PIECES** 

Complete with protective zip case.

#### **Set Contents:**

1.4 x 40, 2.0 x 40, 2.4 x 75, 3.0 x 75 and 4.0 x 100mm.



PH0-3 x 40, PH0-2 x 75, PH-0 x 75 and PH1 x 100mm.



**HAND TOOLS** 



Number Weight of Pieces each		Order Code KEN-572	Price/1 RND
9	265g	-4470K	329.20



#### 7 Heavy Duty Magnetic Driver

Square section mechanic's pattern handle. Suitable for use with 1/4" hexagon driver bits etc. Hexagonal blade also allows the application of a spanner forhigh torque.



Overall	Weight	Order Code	Price/1
Length	Per 5	KEN-573	RND
200mm (8")	750g	-7070K	153.30

#### 6-in-1 Handles

Contoured grip plastic grip handle for improved comfort, control and higher torque. In-handle storage of up to six bits. Magnetic bit retention. EXTENDED RANGE

Switchable forward, reverse and fixed positive industrial quality ratchet action. Bright finish chrome vanadium blade.



#### **Fixed**

HAND TOOLS

Chrome vanadium steel blade with plastic sheaving to prevent damage to fragile components.



#### Supplied with 25mm long 6mm ( $\frac{1}{4}$ ") hex bits:







<b>Crossp</b> No.1 ar		<b>PZ</b> No.1 and 2.		<b>Flat:</b> nd 6mm.
Handle Type	Overall Length	Weight each	Order Code KEN-573	Price/1 RND
Ratchet	200mm (8")	175g	-7040K	160.40
Fixed	200mm (8")	205g	-7060K	67.30

#### Reversible Blade Screwdriver

145mm long reversible hexagon blade with 6mm flat point and No.2 crosspoint ends. Cabinet handle style.



Overall length: 155mm.



Overall Length	Weight	Order Code <b>KEN-573</b>	Price/1 RND
155mm/6"	55g	-7400K	67.70

### Magnetic Screwdriver Bit Holder

Chrome vanadium steel blade with moulded dual grip handle for improved user comfort allowing more torque to be applied. Fixed blade with a quick release magnetic chuck.

Overall length: 185mm. Blade length: 80mm.



Overall Length	Order Code <b>KEN-573</b>	Price/1 RND
200mm (8")	-7420K	123.50

#### Magnetic Screwdriver Bit Set

11 piece 1/4" hexagon bits. Chrome vanadium steel blade with moulded dual grip handle designed for improved user comfort allowing more torque to be applied.

Switchable forward, reverse and fixed positive industrial quality ratchet action. Bright finish chrome vanadium blade.



#### **Contents** 25mm Driver Bits:

Crosspoint: No.1, 2 and 3.

PZ: No.1, 2 and 3.

Flat: 3, 4, 5 and 6mm.



Product	Overall	Order Code	Price/1
Number	Length	KEN-573	RND
DBH100	200mm (8")	-7050K	217.20





**HAND TOOLS** 

## Screwdriver

All Kennedy screwdriver bits have a hardness of 58 - 62HRC. High alloy chrome molybdenum steel for use on hand and power tools.



25mm overall length





38mm overall length

50mm overall length

#### 150mm overall length

#### 1/4" Hex Drive Bits

Flat
$\triangle$
$\bigcup$



Tip	Overall	Weight	Order Code	Price/1
Size	Length	each	KEN-573	RND
3.0	25	5g	-1360K	6.70
3.0	38	5g	-1760K	9.40
3.5	25	5g	-1370K	6.70
3.5	38	5g	-1770K	9.40
4.0	25	5g	-1380K	6.70
4.0	38	5g	-1780K	9.40
4.5	25	5g	-1390K	6.70
4.5	38	5g	-1790K	9.40
5.0	25	5g	-1400K	6.70
5.0	38	5g	-1800K	9.40
5.0	150	30g	-1170K	29.40
5.5	25	5g	-1410K	6.70
5.5	38	10g	-1810K	9.40
5.5	150	30g	-1172K	29.40
6.0	25	5g	-1420K	6.70
6.0	38	10g	-1820K	9.40
6.0	150	30g	-1174K	29.40
6.5	25	5g	-1430K	6.70
6.5	38	10g	-1830K	9.40
8.0	25	5g	-1460K	6.70
8.0	38	10g	-1860K	9.40
10.0	25	10g	-1500K	6.70
	20	±0g	±000K	0.70

#### PΖ






Point Size	Overall Length	Weight each	Order Code KEN-573	Price/1 RND
No.0	25	5g	-1100K	6.30
No.1	25	5g	-1110K	6.70
No.1	50	10g	-1710K	11.20
No.1	150	30g	-1160K	29.40
No.2	25	5g	-1120K	6.70
No.2	50	10g	-1720K	11.20
No.2	150	30g	-1162K	29.40
No.3	25	5g	-1130K	6.70
No.3	50	10g	-1730K	11.20
No.3	150	30g	-1164K	29.40
No.4	25	5g	-1140K	6.70

#### Crosspoint





#### *¹*⁄₄″ Hexagon Drive Cup Hook **Driver Bit**

A hollowed out 'Y' shaped driver bit designed for the driving in of cup hooks.

Overall length: 25mm.



Overall Length	Order Code KEN-573	Price/1 RND
25mm	-7500K	22.80

#### **V4" Hex Contractor Packs**

The most popular style driver bits, multi-packed for economy. Supplied in plastic pocket cases that are ideal for the industrial user.

Insert Bits: plain shank for use with bit adaptors etc. Direct Bits: ball recessed for use in power tools.

#### No.2 PZ



(T)				-	No. of Concession, Name of Street, or other Designation, or other
Bit L	ength	Pack		Order Code	Price/1
Style (	mm)	Qty	Pack	KEN-573	RND
Insert	25	10	60g	-1125K	67.50
Insert	50	5	60g	-1725K	86.10
Direct	53	5	60g	-2125K	59.70

#### No.2 Crosspoint



Bit Length	Pack	Weight/	Order Code	Price/1
Style (mm)	Qty	Pack	KEN-573	RND
Insert 25	10	60g	-1025K	67.50
Insert 50	5	60g	-1625K	50.30



TX
6



Tip	Overall	Weight	Order Code	Price/1
Size	Length	each	KEN-573	RNĎ
		¹⁄4" Hex ∣	Bits	
TX5	25	5g	-3558K	8.60
TX6	25	5g	-3560K	9.00
TX7	25	5g	-3570K	9.00
TX8	25	5g	-3580K	9.00
TX9	25	5g	-3590K	9.00
TX10	25	5g	-3600K	9.00
TX15	25	5g	-3650K	9.00
TX20	25	5g	-3700K	9.00
TX25	25	5g	-3750K	9.00
TX27	25	5g	-3770K	9.00
TX30	25	5g	-3800K	9.00
TX40	25	5g	-3900K	9.00
TX45	25	5g	-3910K	8.60
TX50	25	5g	-3920K	8.60

#### **Tamperproof TXS**

For repair and servicing on electronic, electrical and

mechanical equipment.

Tip Size	Overall Length	Weight each	Order Code <b>KEN-573</b>	Price/1 RND
TX6	25	4g	-4100K	13.30
TX7	25	4g	-4110K	13.30
TX8	25	4g	-4120K	13.30
TX9	25	4g	-4130K	13.30
TX10	25	4g	-4140K	13.30
TX15	25	4g	-4150K	13.30
TX20	25	4g	-4160K	13.30
TX25	25	4g	-4170K	13.30
TX27	25	5g	-4180K	13.30
TX30	25	5g	-4190K	13.30
	TX6 TX7 TX8 TX9 TX10 TX15 TX20 TX25 TX27	Size         Length           TX6         25           TX7         25           TX8         25           TX9         25           TX10         25           TX15         25           TX20         25           TX25         25           TX27         25	Size         Length         each           TX6         25         4g           TX7         25         4g           TX8         25         4g           TX9         25         4g           TX10         25         4g           TX15         25         4g           TX20         25         4g           TX25         25         4g           TX27         25         5g	Size         Length         each         KEN-573           TX6         25         4g         -4100K           TX7         25         4g         -4110K           TX8         25         4g         -4120K           TX9         25         4g         -4130K           TX10         25         4g         -4140K           TX15         25         4g         -4150K           TX20         25         4g         -4160K           TX25         25         4g         -4170K           TX27         25         5g         -4180K



Bit I Style	ength	Pack Qty	Weight/ Pack	Order Code KEN-573	Price/1 RND
Insert	25	10	60g	-3705K	36.30

KEN-573-1025K QTY 10

#### Hexagon






l	Size	Length	each	KEN-573	RND
l	3/32"	25	5g	-3350K	6.70
l	1/8"	25	5g	-3360K	6.70
l	5/32"	25	5g	-3370K	6.70
l	3/16"	25	<u>5g</u> 5g	-3380K	6.70
l	1/4"	25	5g	-3390K	6.70
l	<sup>7/</sup> 32"	25	5g	-3400K	6.70
l	5/16"	25	5g	-3410K	6.70
l	1.5	25	5g	-3430K	6.70
l	2.0	25	5g	-3440K	6.70
l	2.5	25	5g	-3450K	6.70
l	3.0	25	5g 5g 5g 5g 5g 5g	-3460K	6.70
l	4.0	25	5g	-3470K	6.70
l	5.0	25	5g	-3480K	6.70
l	5.5	25	5g 5g 5g	-3485K	6.70
l	6.0	25	5g	-3490K	6.70
l	7.0	25	5g 5g	-3500K	6.70
l	8.0	25	5g	-3510K	6.70
l	10.0	25	5g	-3530K	6.70
ı	*				

#### **Ball Point Hexagon**





#### **Tamperproof Hex**



**13.30** 

4200K

_				
Hex Size	Overall Length	Weight each	Order Code KEN-573	Price/1 RND
1.5	25	5g	-8680K	6.00
2.0	25	5g	-8682K	6.00
2.5	25	5g	-8684K	6.00
3.0	25	5g	-8686K	6.00
4.0	25	5g	-8688K	6.00
5.0	25	5g	-8690K	6.00
5.5	25	5g	-8692K	6.00
6.0	25	5g	-8694K	6.00
7.0	25	5g	-8696K	6.00
0.0	0.5	-2	00001/	

TX40

25 25 25

#### V4" Hex Bits

			-	
Tip Size	Overall Length	Weight each	Order Code KEN-573	Price/1 RND
No.0	25	4g	-2900K	11.90
No.1	25	4g	-2910K	11.90
No.2	25	4g	-2920K	11.90
No.3	25	4g 5g	-2930K	11.90
No.4	25	5g	-2940K	11.90
No.5	25	5g	-2950K	11.90
No.6	25	6g	-2960K	11.90
No.7	25	7g	-2970K	11.90
No.8	25	8g	-2980K	11.90

110.7	25	1 g	-231UN	TT.90
No.8	25	8g	-2980K	11.90
Phillips A	ACR® II			
		- 6		
(57)				STATE OF THE PERSON NAMED IN
Tip	Overall	Weight	Order Code	Price/1
Size	Length	each	<b>KEN-573</b>	RNĎ
No.1	25	5g	-8640K	4.90
No.2R	25	5g	-8642K	4.90
No.2	25	5g	-8644K	4.90
No.3	25	5g 5g 5g 5g	-8646K	4.90
DI. IIII	1000			

(F)	ACR <sup>©</sup>			
Tip Size	Overall Length	Weight each	Order Code KEN-573	Price/1 RND
No.1 No.2 No.3	25 25 25	5g 5g 5g	-8648K -8650K -8652K	4.90 4.90 4.90
Pozi AC	R® II			

Tip	Overall	Weight each	Order Code	Price/1
Size	Length		KEN-573	RND
No.1	25	5g	-8630K	4.90
No.2	25	5g	-8632K	4.90
No.3	25	5g	-8634K	4.90

SIT®			-	1704
Tip	Overall	Weight each	Order Code	Price/1
Size	Length		KEN-573	RND
No.10	25	5g	-8620K	9.30
No.20	25	5g	-8622K	9.30
No.25	25	5g	-8624K	9.30
No.30	25	5g	-8626K	9.30
No.40	25	5g	-8628K	9.30

#### Double-Ended 1/4" Hex Bits

All with overall length 60mm (23/8").

#### **Crosspoint x Slotted**

HAND TOOLS

<b>+</b>		-	$\bigcirc$
Tip Width	Weight	Order Code	Price/1
x Size	each	KEN-573	RND
4.5mm x No.1	10g	-5610K	17.20
5.5mm x No.2	10g	-5620K	17.20
7.0mm x No.3	10g	-5630K	17.20

#### Slotted x PZ

$\ominus$	1/05/	<b>*</b>	
Tip Width	Weight	Order Code	Price/1
x Size	each	KEN-573	RND
4.5mm x No.1	10g	-5710K	17.20
5.5mm x No.2	10g	-5720K	17.20
7.0mm x No.3	10g	-5720K	17.20

#### Crocenaint

(†)			
Tip Width	Weight	Order Code	Price/1
x Size	each	KEN-573	RND
No.1 x No.2	10g	-5810K	17.20
No.2 x No.3	10g	-5820K	17.20
No.2 x No.2	10g	-5920K	17.20

No.2 x No.2	10g	-5920K	17.20			
PZ						
Tip Width	Weight each	Order Code	Price/1			
x Size		KEN-573	RND			
No.1 x No.2	15g	-5850K	17.20			
No.2 x No.3	15g	-5860K	17.20			
No.2 x No.2	15g	-5950K	17.20			

#### Square Overall Length Price/1 RND Weight Tip Size Order Code **KEN-573** each 25 -8510K 3.80 0 25 25 25 25 -8512K -8514K 3.80 3.80 3.80 5g 1 2 3 5g 5g -8516K 25 -8518K 3.80

Spline				
Tip Size	Overall Length	Weight each	Order Code KEN-573	Price/1 RND
4	25	5g 5g	-8530K	5.40
5	25	5g	-8532K	5.40
6	25	5g	-8534K	5.40
- 8	25	5g	-8536K	7.60
10	25	5g 5g 5g	-8538K	10.80

Spanner				
Tip Size	Overall Length	Weight each	Order Code KEN-573	Price/1 RND
No.4	25	5g	-8660K	6.00
No.6	25	5g	-8662K	6.00
No.8	25	5g	-8664K	4.90
No.10	25	5g	-8666K	6.00
No.12	25	5g	-8668K	6.00
T® C-				

O Se	ets			
Tip Size	Overall Length	Weight each	Order Code KEN-573	Price/1 RND
No.4	25	5g	-8600K	6.50
No.5	25	5g	-8602K	6.50
No.6	25	5g	-8604K	6.50
No.8	25	5g	-8606K	6.50
No.10	25	5g	-8608K	6.50
1/4"	25	5g	-8610K	6.50

Clutch				
Tip Size	Overall Length	Weight each	Order Code KEN-573	Price/1 RND
5/32" 3/16"	25 25	5g	-8580K	4.40
<sup>9/16</sup> 1/4"	25 25	5g 5g	-8582K -8584K	4.40 4.40

#### 5/16" Hex Bits

(i	rosspo	int			
`	Point Size	Overall Length	Weight each	Order Code KEN-573	Price/1 RND
	No.1 No.2 No.3 No.4	32mm 32mm 32mm 38mm	5g 5g 10g 10g	-2410K -2420K -2430K -2440K	11.20 11.20 11.20 11.20

		0		
PZ		(		
Point Size	Overall Length	Weight each	Order Code KEN-573	Price/1 RND
No.1 No.2 No.3 No.4	32mm 32mm 32mm 38mm	10g 10g 10g 10g	-2510K -2520K -2530K -2540K	11.20 11.20 11.20 11.20

Flat				
Point	Overall	Weight	Order Code	Price/1
Size	Length	each	KEN-573	RNĎ
6.0	41mm	15g	-2720K	15.70
8.0	41mm	15g	-2780K	<b>15.70</b>
10.0	41mm	20g	-2800K	22.70
12.0	41mm	20g	-2820K	22.70
14.0	41mm	25ğ	-2880K	22.70
TV				

				The Case
Point	Overall	Weight	Order Code	Price/1
Size	Length	each	KEN-573	RND
TX25	35mm	10g	-4250K	15.70
TX30	35mm	10g	-4300K	<b>15.70</b>
TX40	35mm	15g	-4400K	<b>15.70</b>
TX45	35mm	15g	-4450K	15.70
TX50	35mm	15ğ	-5500K	<b>15.70</b>
TX55	35mm	20g	-5550K	15.70

#### 10mm Hex Drive Bits

			Street, or other Designation of the last		
•	(3)			-	
	Tip Size	Overall Length	Weight each	Order Code KEN-573	Price/1 RND
_	TX20	30 75	13g 43g	-8750K -8770K	9.30 17.30
-	TX25	30 75	13g 43g	-8752K -8772K	9.30 17.30
	TX30	30 75	13g 43g	-8754K -8774K	9.30 17.30
	TX40	30 75	14g 44g	-8756K -8776K	9.30 17.30
-	TX45	30 75	15g 45g	-8758K -8778K	9.30 17.30
	TX50	30 75	16g 46g	-8760K -8780K	9.30 17.30

18g

48g

17.30

28.20

-8762K -8782K

### TX55 Hexagon

**Spline** 

$\bigcirc$				
Point Size	Overall Length	Weight each	Order Code KEN-573	Price/1 RND
4	30	12g	-8800K	20.20
5	30	15g	-8802K	20.20
6	30	16g	-8804K	20.20
7	30	15g	-8806K	20.20
8	30	16g	-8808K	20.20
10	30	19g	-8810K	20.20
12	30	24g	-8812K	20.20
4	75	42g	-8820K	28.70
5	75	44g	-8822K	28.70
6	75	44g	-8824K	28.70
7	75	45g	-8826K	28.70
8	75	46g	-8828K	28.70
10	75	64g	-8830K	28.70
12	75	67g	-8832K	28.70

#### Overall Weight Order Code **KEN-573** RNĎ Size Length each 12g -8880K 20.20 -8882K -8884K -8886K 6 30 13g 20.20 20.20 20.20 30 30 14g 17g 8 10 23.70 28.20 30 75 75 -8888K <u>18g</u> 39g -8900K 6 40g -8902K 28.20 8 10 42g -8904K 28.20 -8906K -8908K 28.20 46g

#### Yankee Screwdriver Bit

Manufactured from high quality chrome vanadium steel. To suit Yankee spiral ratchet screwdrivers.

#### **Heavy Duty**

To suit Kennedy 620mm Yankee and Stanley® 131B™ Yankee.

Tip Size	Weight each	Order Code KEN-572	Price/1 RND
⊖ 7.0	40g	-8980K	23.90



AND

TOOLS

#### Titanium Screwdriver Bits

Titanium bits improve wear resistance. For use with hand and power tools.

### 1/4" Hex Bits - Flat

Point	Length	Order Code	Price/1
Size	(mm)	KEN-573	RND
5.0	25	-8042K	35.30
6.0	25	-8044K	35.30

#### == 1/4" Hex Bits -Crosspoint

Point Size	Length (mm)	Order Code KEN-573	Price/1 RND
No.1	25	-8010K	35.30
No.2	25	-8012K	35.30
No.2	50	-8052K	59.70
No.2	150	-8032K	65.80
No.3	25	-8014K	35.30

### 1/4" Hex Bits - PZ

Point Size	Length (mm)	Order Code KEN-573	Price/1 RND
No.1	25	-8020K	35.30
No.1	50	-8060K	59.70
No.2	25	-8022K	35.30
No.2	50	-8062K	59.70
No.2	150	-8030K	65.80
No.3	25	-8024K	35.30
No.3	50	-8064K	59.70

#### 1/4" Hex Bits - Hex

Point Size	Length (mm)	Order Code KEN-573	Price/1 RND
2.5	25	-8102K	35.30
3.0	25	-8104K	35.30
4.0	25	-8106K	35.30
5.0	25	-8108K	35.30
6.0	25	-8110K	35.30
8.0	25	-8112K	35.30

#### (1) 1/4" Hex Bits - TX

Point Size	Length (mm)	Order Code KEN-573	Price/1 RND
TX10	25	-8152K	47.10
TX15	25	-8154K	47.10
TX20	25	-8156K	47.10
TX25	25	-8158K	47.10
TX30	25	-8160K	47.10
TX40	25	-8162K	47.10

#### 24" Direct Drive Bits - Crosspoint

	-		
Point Size	Length (mm)	Order Code KEN-573	Price/1 RND
No.2	50	-8072K	79.20

#### 1/4" Direct Drive Bits - PZ

Point	Length	Order Code	Price/1
Size	(mm)	KEN-573	RND
No.1	50	-8080K	79.20
No.2	50	-8082K	79.20

#### Powerbit - PZ

	1		-
Point Size	Length (mm)	Order Code KEN-573	Price/1 RND
No.2	70	-8092K	75.10
No.2	90	-8094K	83.50

#### 5/16" Hex Bits -Crosspoint

Point	Length	Order Code	Price/1
Size	(mm)	KEN-573	RND
No.3	30	-8204K	48.10
No.4	30	-8206K	48.10

#### 5/16" Hex Bits -PZ

Point Size	Length (mm)	Order Code KEN-573	Price/1 RND
No.2	30	-8212K	48.10
No.3	30	-8214K	48.10
No 4	40	921 GV	40 10

#### **Desoutter Shank Bits**

5/16" hex. with Desoutter style ball locator. Crosspoint

#### Point RNĎ Size Length each **KEN-573** No.2 15g -3020K 26.40 No.2 94 -3180K 55.80

## D7

(	- ₽				
	Point Size	Overall Length	Weight each	Order Code <b>KEN-573</b>	Price/1 RND
	No.1	53	15g	-3110K	26.40
	No.2	53	15g	-3120K	26.40
	No.3	53	20g	-3130K	26.40

#### **Desoutter Shank Adaptors**

5/16" hexagon shank with Desoutter style ball locator. For use with insert bits.

#### Magnetic

		1000		-
Socket Hex	Overall Length	Weight each	Order Code KEN-573	Price/1 RND
1/4"	46	35g	-6110K	73.90

#### **Magnetic with Retainer**



35g

#### **Socket Adaptor**

1/4" hex. drive.



#### **Socket Driver Adaptor**

1/4" Hexagon drive magnetic bit adaptor socket.



Square	Length	Weight	Order Code	Price/1
Drive	(mm)	each	KEN-573	RND
1/4"	25	16g	-8710K	28.80

#### **Direct Drive Adaptors** for Power Tools

1/4" hexagon shank with ball recess. For use with insert bits.

#### **Ouick Release** with Retainer



			_	
Socket Hex	Length (mm)	Weight each	Order Code KEN-573	Price/1 RND
1/4"	60	50g	-6200K	114.20

#### Magnetic with Retainer

Socket Hex	Length (mm)	Weight each	Order Code KEN-573	Price/1 RND
1/4"	74	70g	-6150K	94.50
5/16"	74	50g	-6170K	94.50

#### Magnetic




#### Direct Drive Bits for Power Tools

SCREWDRIVER BITS

1/4" Hex with ball recess.

			43		
Poi Siz		Overall Length	Weight each	Order Code KEN-573	Price/1 RND
TX	7	38	5g	-3950K	12.40
TX	8	38	5g	-3960K	12.40
TX	9	38	5g	-4000K	12.40
TX	10	38	5g	-4010K	12.40
TX	15	38	5g	-4020K	12.40
TX	20	38	5g	-4030K	12.40
TX	25	38	5g	-4040K	12.40
TX	27	38	10g	-4050K	12.40
TX	30	38	10g	-4060K	12.40
TX	40	38	10g	-4070K	12.40

#### Flat $\ominus$



#### Crosspoint

 $\oplus$ 



## PΖ **(引**

Point Size	Overall Length	Weight each	Order Code KEN-573	Price/1 RND
No.1	38	7g	-1310K	10.20
No.1	50	10g	-2110K	13.30
No.1	70	20g	-2150K	<b>15.70</b>
No.1	90	21g	-2160K	18.20
No.2	38	8g	-1320K	10.20
No.2	50	10g	-2120K	13.30
No.2	70	20g	-2152K	15.70
No.2	90	25g	-2162K	18.20
No.3	38	8g	-1330K	10.20
No.3	50	10g	-2130K	13.30
No.3	70	20g	-2154K	<b>15.70</b>
No.3	90	25g	-2164K	18.20

#### **Contents:**

- **Hex:** 2, 2.5, 3, 4, 5 and 6mm.
- PZ: No.1 x2, No.2 x3, No.3 x2.
  - **TX:** TX10, TX15, TX20 TX25, TX30, TX40.
- **Crosspoint:** No.0, No.1 x2, No.2 x3, No.3 x2.
- Flat: 3, 4, 5, 6 and 6.5mm.  $\frac{1}{4}$  magnetic drive adaptor.



Number of Pieces	Weight each	Order Code KEN-573	Price/1 RND
33	240g	-6480K	250.30

#### Flat & Crosspoint Bit Set

- → Flat: 3, 4, 5, 6 and 8mm.
- Crosspoint: No.0, 1, 2 and 3.
  All <sup>1</sup>/<sub>4</sub>" hex. x 25mm overall length, complete with quick release <sup>1</sup>/<sub>4</sub>" hexagon bit adaptor.



of Pieces	each	KEN-573	RNĎ
10	120g	-6410K	216.50

#### **Tri-Wing Bit Set**

HAND TOOLS

**Tri-Wing:** 0, 1, 2, 3, 4, 5, 6, 7 and 8.

All <sup>1</sup>/<sub>4</sub>" hex. x 25mm. overall length, complete with quick release <sup>1</sup>/<sub>4</sub>" hexagon bit adaptor.

Weight each

125g

ı	ú	i	A	ä	00	
-				٦		
- 4				_		ļ
	L	111			111111	11111100

**KEN-573** 

-6550K

**TX Bit Set** 

T8, 9, 10, 15, 20, 25, 27, 30 and 40.

All ½4" hex. x 25mm overall length, complete with quick release ¼4" hexagon

with quick release <sup>1</sup>/<sub>4</sub>" hexagon bit adaptor.



Number of Pieces	Weight	Order Code	Price/1
	each	KEN-573	RND
10	120g	-6430K	225.40

#### **Tamperproof TXS Bit Set**

T8, 9, 10, 15, 20, 25, 27, 30 and 40.

All <sup>1</sup>/<sub>4</sub>" hex. x 25mm overall length, complete with quick release <sup>1</sup>/<sub>4</sub>" hexagon bit adaptor.





Number of Pieces	Weight each	Order Code KEN-573	Price/1 RND
10	115g	-6440K	238.60

#### **Engineer's Bit Set**

All  $^{1}\!\!/_4$ " hex. x 25mm overall length, complete with magnetic spinner handle,  $^{1}\!\!/_4$ " hexagon bit adaptor and  $^{1}\!\!/_4$ " square socket adaptor.

- Hexagon: 2, 3, 4, 5, 6, 7 and 8mm. 3/32", 1/8", 5/32", 3/16", 1/4", 7/32" and 5/16"
- Flat: 3, 4, 5, 5.5, 6.5 and 8mm.
- Crosspoint: No.1, 2 and 3.
- PZ: No.1, 2 and 3.

Number of Pieces	Weight	Order Code	Price/1
	each	KEN-573	RND
29	500g	-6450K	382.90



#### **Mechanic's Bit Set**

All  $\frac{1}{4}$ " hex. x 25mm overall length, complete with magnetic spinner handle,  $\frac{1}{4}$ " hexagon bit adaptor and  $\frac{1}{4}$ " square socket adaptor.

- **TX:** 7, 8, 9, 10, 15, 20, 25, 27, 30 and 40.
- Crosspoint: No.1, 2 and 3.
  - Flat: 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5 and 8mm
- **PZ:** No.1, 2 and 3.

10

Price/1 RND

286.50

 Number	Weight	Order Code	Price/1
of Pieces	each	KEN-573	RND
20	1004	6470V	



Number of Pieces

10

**PIECES** 

#### 10mm AF Hexagon Drive Screwdriver Bits

#### Torx®

Contents: 1/2" Sq. drive x 10mm Hex. bit holder TORX 10 x 75mm: T20, T25, T30, T40, T45, T50 and T55 TORX 10 x 30mm: T20, T25, T30, T40, T45, T50 and T55 Torx is a registered trade mark of Camcar/Textron Inc.

> 15 **PIECES**



Number of Pieces	Case	Weight	Order Code	Price/1
	Type	each	<b>KEN-573</b>	RND
15	Moulded	945g	-6340K	385.30

#### 10mm Hexagon Power Bit Set

This Impact Driver Bit Set is suitable for workshop and manufacturing use. Made from chrome molybdenum the range includes Hexagon, TX and Spline bits with 3/8" and 1/2" x 10mm Bit Adaptors that are suitable for hand and power impact drivers.

#### Contents:

3/8" and 1/2" Square x 10mm Hexagon Bit Adaptors.

75mm x 10mm **Hexagon bits:** Hexagon: 4, 5, 6, 7, 8, 10 and 12mm. TX: Tx20, Tx25, Tx30, Tx40, Tx45, Tx50 and Tx55. Spline: 5, 6, 8, 10 and 12mm.

30mm x 10mm **Hexagon bits:** Hexagon: 4, 5, 6, 7, 8, 10 and 12mm. TX: Tx20, Tx25, Tx30, Tx40, Tx45, Tx50 and Tx55. Spline: 5, 6, 8, 10 and 12mm.

40



Number	Case	Weight	Order Code <b>KEN-573</b>	Price/1
of Pieces	Type	each		RND
40	Moulded	1.75kg	-6490K	379.70

#### Service Set

<sup>1</sup>/<sub>4</sub>" hex. bit holders <sup>1</sup>/<sub>4</sub>" and <sup>3</sup>/<sub>8</sub>" square drive.

#### 1/4" Hex 25mm Long:

**TX:** T6, 7, 8, 9, 10, 15, 20, 25, 27, 30 and 40.

**Flat:** 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 8

and 10mm. Crosspoint: No. 0, 1, 2 and 3.

**PZ:** No. 1, 2 and 3.

**1/4" Hex 38mm Long: Flat:** 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5 and 8mm.

1/4" Hex 50mm Long Ball Retainer Fitting:

**Flat:** 4, 5, 6, 8 and 10mm.

PZ: No. 1, 2 and 3.

**Crosspoint:** No. 0, 1, 2, 3 and 4. 1/4" Hex 50mm Long Plain Hex Shank:

**Crosspoint:** No. 1, 2 and 3.

**PZ:** No. 1, 2 and 3.

 $^{1/4}$ " Hex 60mm Long Double-Ended: No.1 Crosspoint x 4.5mm Flat

No.1 PZ x 4.5mm Flat


No.2 Crosspoint x 5.5mm Flat

No.2 **PZ** x 5.5mm **Flat** 

No.3 Crosspoint x 6.5mm Flat

No.3 **PZ** x 6.5mm **Flat.** 

64 **PIECES** 

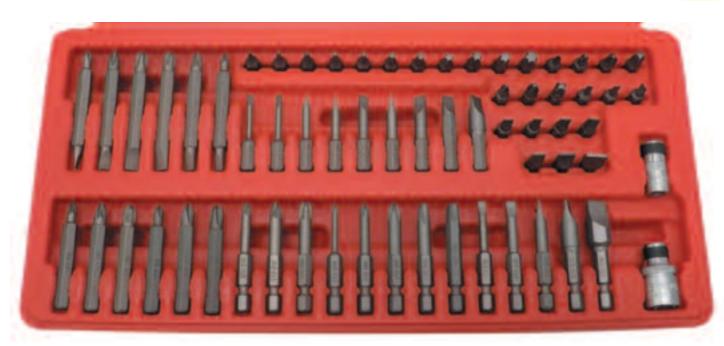

_	Number of Pieces	Weight each	Order Code <b>KEN-573</b>	Price/1 RND
	64	840g	-6500K	1038 70

#### 🔽 Mechanic's Screwdriver Bit Set

Crosspoint: No.1, No.2, No.3.

**Pozidřív**<sup>®</sup>: No.1, No.2 (x2), No.3. **Torx**<sup>®</sup>: 6, 7, 8, 9, 10, 15, 20, 25, 27, 30, 40. **Slotted:** 3, 3.5, 4, 4.5, 5, 5.5, 6.5, 8mm.

**Spline:** 5, 6, 8, 10mm.

<sup>1</sup>/<sub>4</sub>" hex x 60mm quick release magnetic bit holder.

1/4" square drive. 1/4" hex magnetic bit holder.

Supplied in a moulded case with a belt clip.

32

**PIECES** 



Number of Pieces	Case Type	Weight each	Order Code <b>KEN-573</b>	Price/1 RND
32	Moulded	260g	-6320K	209.60

#### Engineer's Screwdriver Bit Set

Crosspoint: No.1, No.2, No.3. Pozidriv®: No.1, No.2, No.3.

Torx®: 15, 20.
Slotted: 3.5, 4.5, 5, 5.5, 6.5, 8mm.

**Hexagon:** 2, 3, 4, 5, 6, 8, 10mm, 3/32", 1/8", 5/32", 3/16", 1/4", 5/16".

**Square:** 1, 2, 3.

<sup>1</sup>/<sub>4</sub>" hex x 60mm quick release magnetic bit holder.

1/4" square drive.

1/4" hex magnetic bit holder.

Supplied in a moulded case with a belt clip.

32

**PIECES** 

Number

of Pieces

32



Moulded



-6300K

270g

#### Mechanic's Screwdriver Bit Set

#### **SBM060**

Mechanic's screwdriver bit set contents:

 $^{1/4}$ " sq. drive dual density spinner handle.  $^{1/4}$ " sq. drive -  $^{1/4}$ " Hex Magnetic bit holder.

1/4" Hex x 25mm Screwdriver Bits:

Crosspoint: No.1, No.2, No.3.

Pozidriv: No.1, No.2, No.3. Torx: T5, T6, T7, T8, T9, T10, T15,T20, T25,

HAND

T27, T30, T40. **Slotted:** 3.5, 4.5, 5.5, 6.5, 8.

**Hexagon:** 1.5, 2, 2.5, 3, 4, 5, 6, 7, 8. **Tri-Wing:** No.3, No.4, No.5.


Torq Set: TS.5, TS.6, TS.8, TS.10. SIT: No.10, No.20, No.25, No.30, No.40.

1/4" Sq Drive Single Hex Sockets:

4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm.

1/4" Hex Y adaptor for cup hook.

Number Case of Pieces Type		Order Code KEN-573	Price/1 RND
60	Metal	-6360K	420.20

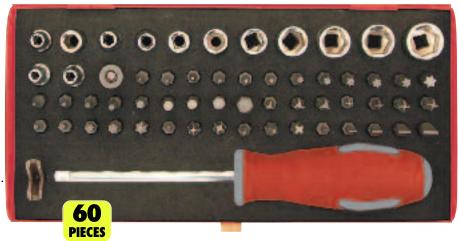

#### Master Screwdriver Bit Set

1/4" hex x 25mm insert bits. Manufactured from chrome molybdenum. Bit holder made from chrome vanadium hardened steel, tempered and chrome plated. Uniquely packaged in a moulded plastic case for easy organisation and storage.

100 **PIECES** 

220.50

Crosspoint: No.0, No.1, No.2R, No.2, No.3, No.4. Pozidrive®: No.0, No.1, No.2, No.3, No.4. Square: 0, 1, 2, 3, 4.

Torx®: T6, T7, T8, T9, T10, T15, T20, T25, T27,

T30, T40, T45, T50. Clutch: 5/32, 3/16, 1/4.

Hex: 1.5, 2, 2.5, 3, 4, 5, 6, 7, 8, 10. Slotted: 3, 3.5, 4.5 5, 5.5, 6.5.

Crosspoint ACR II: No.1, No.2R, No.2, No.3.

Pozidriv® ACR: No.1, No.2, No.3.

**Spline:** 4, 5, 6, 8.

Torq®Set: 4, 5, 8, 10,  $\frac{1}{4}$ ". **Spanner:** 4, 6, 8, 10, 12.

Torx® Tamper Resistant: T6, T7, T8, T9, T10,

T15, T20, T25, T27, T30, T40.

Hex Tamper Resistant: 1.5, 2, 2.5, 3, 4, 5, 5.5,

**Tri-Wing:** No.1, No.2, No.3, No.4, No.5.  $\frac{1}{4}$  square drive x  $\frac{1}{4}$  hex magnetic bit

holder - 25mm.

 $\frac{1}{4}$ " hex x  $\frac{1}{4}$ " hex magnetic bit holder - 60mm.  $\frac{1}{4}$ " hex x  $\frac{1}{4}$ " square drive socket adaptor - 25mm.  $\frac{1}{4}$ " hex x  $\frac{1}{4}$ " square drive socket adaptor - 50mm.

"Y" Adaptor for cup hook or screw eye.

**Dimensions (H x W x D):** 123 x 177 x 35mm.



Number of Pieces	Case	Weight	Order Code	Price/1
	Type	each	KEN-573	RND
100	Moulded	690d	-6350K	550.20



Industrial quality impact driver with switchable forward and reverse screwdriver rotation. When the impact resistant handle is struck with a hammer the downward force is converted by the impact driver's internal mechanism into a powerful high torque screwdriver rotation action. Ideal for ensuring fasteners are securely tightened and for freeing stuck fasteners. Hex drive nose pieces can be removed to allow use with  $\frac{1}{2}$  square drive impact sockets.

To suit  $\frac{5}{16}$ " hex,  $\frac{3}{8}$ " and  $\frac{1}{2}$ " square drives. **Complete with: Crosspoint:** No.1, 2, 3 and 4. Flat Bits: 6, 8, 10 and 12mm. Hex Bits: 4,5, 6 and 8mm.



Number of Pieces	Case	Weight	Order Code	Price/1
	Type	each	KEN-573	RND
14	Moulded	1 20kg	-7100K	310.00

14 **PIECES** 



Number of Pieces	Weight each	Order Code KEN-573	Price/1 RND
5	0.75kg	-7080K	192.10

40-Piece Impact Driver Set  $^{1}2"$  square to  $^{5}46"$  hexagon bit adaptor  $^{1}2"$  square to  $^{3}8"$  hexagon bit adaptor. 80mm x  $^{3}8"$  Hexagon bits, Hexagon: 8mm, 6mm, TX: Tx40, Tx45, Tx50, Crosspoint: No.2, No.3, Slotted: 8mm and 10mm, 35mm x  $^{3}8"$  Hexagon bits, Hexagon: 4mm, 5mm, 6mm, 7mm, 8mm, TX: Tx20, Tx25, Tx30, Tx40, Tx45, Tx50, Crosspoint: No.1, 2, 3 & 4, Slotted: 5mm, 6mm, 8mm, 10mm, 12mm, 30mm x  $^{5}46"$  Hexagon bits, Hexagon: 10mm, 12mm, TX: Tx55, Spline: 5mm, 6mm, 8mm, 10mm, and 12mm.





Price/1 RND

283.20

All Kennedy Professional Safety tools can be used in ATEX zones accordingly to ATEX specifications. Safe for use in high risk hazardous locations, Ideal for chemical, pharmaceutical, power, oil and gas and fire rescue. For gases, vapours and mists the zone classifications are:

Zone 1 A place in which an explosive atmosphere consisting of a mixture with air of dangerous substances in the form of gas, vapour or mist is likely to occur in normal operation occasionally.

A place in which an explosive atmosphere consisting of a mixture with air of dangerous substances in the form of gas, vapour or mist is not likely to occur in normal operation but, if it does occur, will persist for a short period only. For dusts the zone classifications are:

Zone 21 A place in which an explosive atmosphere in the form of a cloud of combustible dust in air is likely to occur in normal operation occasionally.

Zone 22 A place in which an explosive atmosphere in the form of a cloud of combustible dust in air is not likely to occur in normal operation but, if it does occur, will persist for a short period only.

#### Aluminium-Bronze Spark-Resistant Safety Tools

Spark-resistant tools are used to eliminate the chances of accidental fires or explosions in potentially combustible or explosive environments. They resist the sparks that a standard tool could potentially create when striking hard surfaces. The use of spark resistant tools is essential in many industrial applications such as petroleum and chemical manufacturing, spray booth operations, the marine industry, the mining industry, the paper industries, or any location where flammable vapours or combustible residues are present. Aluminium-bronze spark resistant safety tools are manufactured to 25HRC and offer a breaking strain of 75 - 85kgf/mm².

Spark-resistant tools must be maintained with special care. Frequent cleaning/re-dressing to remove ferrous particles or contaminants, which may impair the spark-resistant properties, is essential.

### Screwdrivers





7	Гір	Blade	Weight	Order Code	Price/1
Type	Size	Length	each	KEN-575	RND
	No.1	75	55g	-4520K	185.80
$\odot$	No.2	100	60g	-4540K	194.80
CROSSPOINT	No.3	150	100g	-4560K	270.80
	No.4	200	120g	-4580K	325.00
	6.0mm	100	60g	-4020K	228.50
	6.0mm	150	80g	-4040K	326.50
$\ominus$	7.5mm	200	120g	-4060K	346.10
PARALLEL	9.0mm	250	180g	-4080K	454.60
	9.0mm	300	200g	-4100K	551.80

### Long Nose Pliers

With side cutter, serrated jaws and safety grips.







Overall	Weight	Order Code	Price/1
Length	each	KEN-575	RND
200mm (8")	155g	-3880K	1195.60

#### **Groove Joint Pliers**

Serrated jaws with sliding pivot joint which allows a wide range of jaw opening.








Overall	Maximum	Weight	Order Code	Price/1
Length	Capacity	each	KEN-575	RND
250mm	45mm	415g	-3900K	1382.00

## Adjustable Combination Pliers





ATEX (



Overall	Weight	Order Code	Price/1
Length	each	<b>KEN-575</b>	RND
200mm (8")	335g	-3940K	727.20

#### Linesman Pliers

Serrated jaws for gripping nuts, bolts, studs etc. with side cutter and slip guard safety handles.





Overall	Weight	Order Code	Price/1
Length	each	KEN-575	RND
150mm (6")	165g	-3800K	1011.30
180mm (7")	310g	-3810K	1149.20
200mm (8")	370g	-3820K	1262.40

### **Diagonal Cutting Nippers**

The cutting edge is offset at a slight angle to allow close cuts to a flat surface. Slip guard safety handles.







Overall	Weight	Order Code	Price/1	
Length	each	<b>KEN-575</b>	RND	
150mm (6")	190g	-3850K	961.50	
200mm (8")	285g	-3860K	1165.60	
200111111 (0 )	2006			_

#### **Ball Pein** Hammers






For use with cold chisels, punches, rivets and for shaping metal.




Head Weight	Overall Length (mm)	Weight each	Order Code KEN-575	Price/1 RND
1lb	310	680g	-3020K	461.90
1 <sup>1</sup> / <sub>2</sub> lb	340	950g	-3040K	610.50
2lb	350	1205g	-3060K	932.00

#### **Wrecking Bar**

For general dismantling and stripping applications. V-notch for use on nails.







Overall	Weight	Order Code	Price/1
Length	each	KEN-575	RND
400mm	685g	-2520K	1419.00

#### Marking Tool

Double-ended spark resistant marking tool.

Overall length: 190mm.





Overall	Weight	Order Code	Price/1
Length	each	KEN-575	RND
190mm (7½")	20g	-1800K	180.50

#### **Putty Knife**

ATEX EX Spark resistant putty knife with a chisel point. Blade length: 100mm (4"), Overall length: 200mm (8").



Be

BERYLLIUM

				BER'
Blade Length	Blade Width	Overall Length	Order Code <b>KEN-575</b>	Price/1 RND
100mm (4")	25mm (1")	200mm (8")	-2740K	388.30

#### Scraper

**ATEX** Blade length: 95mm (3<sup>3</sup>/4"). Blade width: 75mm (3"). compliant





Blade	Blade	Overall	Order Code	Price/1	
Length	Width	Length	KEN-575	RND	
95mm (3 <sup>3</sup> / <sub>4</sub> ")	75mm (3")	200mm (8")	-2860K	761.40	

#### Sledge Hammers

Spark-resistant sledge hammers with wooden handles.





					70
Head Size	Length Capacity	Weight each	Order Code KEN-575	Price/1 RND	
1.0kg	400mm (16")	1.30kg	-3200K	538.30	
2.5kg	900mm (35")	3.41kg	-3240K	1290.90	
3.0kg	900mm (35")	3.91kg	-3260K	3038.20	
8.0kg	900mm (35")	8.91kg	-3300K	7354.70	

#### Flat Cold Chisels







#### Overall Weight Price/1 RND Size **KEN-575** (mm) Length (mm) each 14 160g -2020K 227.40 16 160 210g -2040K 279.80 345g 18 20 20 <u>408.</u>70 200 -2060K 430g 200 300 -2080K 568.00 -2100K 783.90 645g 25 240 800g -2120K 897.90 1312.20 1000g -2140K 300 25 400 1360g -2160K 1633.00

#### Wedges

11mm



Dimensions	Weight each	Order Code KEN-575	Price/1 RND
80 x 13 x 6mm	25g	-0500K	53.10
135 x 50 x 18mm	497g	-0510K	644.40
150 x 25 x 13mm	205g	-0520K	228.00
180 x 32 x 13mm	305g	-0540K	329.80
180 x 50 x 19mm	700g	-0560K	900.00
200 x 50 x 13mm	500g	-0580K	545.30
200 x 30 x 30mm	1315g	-0600K	635.70
200 x 40 x 40mm	1200g	-0620K	1342.40

#### **Chisel Cross**

4-point spark resistant chisel with 20mm wide hexagon shaft. Length: 200mm.







Size	Overall Length	Weight each	Order Code KEN-575	Price/1 RND	
7mm	200mm (8")	290g	-2300K	447.30	

#### **Drift Punch**

Tapered punch, used for the purpose of aligning holes between two structural members so that they can be fastened or bolted together.

Overall length: 160mm.

Tip size: 3mm.





#### Overall Weight Order Code **KEN-575** Price/1 RND Size Length each 3mm 160mm (6") 290g -1600K 331.00

#### Square Shovel

Spark resistant shovel with square mouth, polypropylene 'YD' handle and wooden shaft.





Page **503** 

Blade size: 235 x 185mm. Overall length: 950mm.



Head	Head	Overall		Order Code	Price/1
Type	Size	Length		KEN-575	RND
Square	235 x 185mm	950mm (37")	1.80kg	-9240K	2030.40

Serrated jaws with knurled adjusting nut.





#### **Heavy Duty**

HAND TOOLS

Overall Length	Jaw Capacity	Weight each	Order Code KEN-575	Price/1 RND
250mm	30mm	0.80kg	-3580K	1235.60
300mm	40mm	1.20kg	-3600K	1808.70
350mm	50mm	1.55kg	-3620K	2173.70
450mm	60mm	2.45kg	-3640K	3220.80
600mm	75mm	3.65kg	-3660K	4360.30

#### **Open End Slogging Wrench**

With flat striking faces to allow hammer blows to be used to loosen or tighten stubborn fasteners.



 $ATEX(\xi_X)$ Compliant



Size	Overall Length	Weight each	Order Code KEN-575	Price/1 RND
24mm	165mm	275g	-6400K	508.40
27mm	175mm	350g	-6410K	739.70
30mm	185mm	470g	-6420K	852.50
32mm	195mm	535g	-6430K	1038.30
36mm	210mm	780g	-6440K	1209.10
41mm	225mm	965g	-6450K	1566.70
46mm	240mm	1140g	-6460K	1978.70
50mm	255mm	1445g	-6470K	2302.70
55mm	270mm	1705g	-6480K	2687.60
60mm	285mm	2015g	-6490K	2916.80
65mm	305mm	3060g	-6500K	2993.80
70mm	325mm	3620g	-6510K	3554.20
75mm	345mm	3905g	-6520K	3692.80

### Single Open End Spanners



ATEX Ex



Overall Length	Weight each	Order Code KEN-575	Price/1 RND
103mm		-5020K	124.80
125mm		-5040K	223.90
143mm		-5060K	285.90
157mm		-5080K	305.30
195mm		-5100K	504.30
221mm		-5120K	597.20
258mm		-5140K	852.70
272mm		-5160K	1076.60
300mm		-5180K	1287.50
	Length 103mm 125mm 143mm 157mm 195mm 221mm 2258mm 272mm	Length each  103mm 125mm 143mm 157mm 195mm 221mm 258mm 272mm	Length         each         KEN-575           103mm         -5020K           125mm         -5040K           143mm         -5060K           157mm         -5080K           195mm         -5100K           221mm         -5120K           258mm         -5140K           272mm         -5160K

#### Adjustable Wrenches

Smooth jaw adjustment with self-locking design which prevents the jaws opening unintentionally under load.



ATEX (Ex



Overall Length	Opening Capacity	Weight each	Order Code KEN-575	Price/1 RND
150mm	18mm	120g	-1060K	798.00
200mm	24mm	255g	-1080K	1073.00
250mm	30mm	410g	-1100K	1330.60
300mm	36mm	655g	-1120K	1721.80

#### Ratchet Handle

Disc type adjustment with knurled grip and spring loaded ball bearing socket retainer.





Square	Overall	Weight	Order Code	Price/1
Drive	Length	each	<b>KEN-575</b>	RND
1/2"	245mm	615g	-7000K	1562.50
3/4"	320mm	1430g	-8000K	2869.30

### 1/2" Square Drive Swivel Handle

The hinged link allows operation at varied angles to aid access in restricted areas. Fitted with a spring loaded ball bearing socket retainer.







#### 1/2" 250mm 310g -7100K Ring End Slogging Wrench

With flat striking faces to allow hammer blows to be used to loosen or tighten stubborn fasteners.



ATEX(E)Compliant<sup>1</sup>

1044.90

EXTENDED RANGE



Size	Overall length	Weight each	Order Code <b>KEN-575</b>	Price/1 RND
24mm	140mm	250g	-6600K	574.50
27mm	150mm	350g	-6610K	647.60
30mm	165mm	460g	-6620K	851.50
32mm	180mm	610g	-6630K	1032.20
36mm	210mm	780g	-6640K	1198.60
41mm	225mm	985g	-6650K	1794.90
46mm	245mm	1275g	-6660K	2010.40
50mm	255mm	1545g	-6670K	2348.10
55mm	265mm	1720g	-6680K	2800.30
60mm	275mm	2080g	-6690K	2932.70
65mm	290mm	2440g	-6700K	3084.50
70mm	300mm	2735g	-6710K	3376.90
75mm	315mm	3190g	-6720K	3866.70
80mm	342mm	3320g	-6725K	4000.00

### **Combination Spanners**







Cina	Overali	weignt	Order Code	Price/1
Size	Length	each	KEN-575	RNĎ
8mm	125mm	40g	-6020K	269.20
10mm	138mm	59g	-6040K	333.60
11mm	141mm	65g	-6060K	356.30
12mm	146mm	78g	-6080K	386.10
13mm	156mm	89g	-6100K	396.10
14mm	168mm	98g	-6120K	401.80
15mm	176mm	100g	-6140K	417.10
16mm	185mm	130g	-6160K	497.40
17mm	197mm	148g	-6180K	503.40
18mm	205mm	168g	-6200K	514.10
19mm	216mm	190g	-6220K	547.30
21mm	235mm	235g	-6240K	611.20
22mm	248mm	260g	-6260K	670.50
24mm	268mm	335g	-6280K	790.00
27mm	288mm	444g	-6300K	1113.10
32mm	330mm	703g	-6320K	1697.60
36mm	345mm	1002g	-6340K	2136.70

#### Safety Extensions



Fitted with a spring-loaded ball bearing socket retainer.



Square Drive	Overall Length	Weight each	Order Code KEN-575	Price/1 RND
1/2"	125mm	230g	-7040K	777.60
1/2"	250mm	455g	-7060K	989.80
3/4"	200mm	870g	-8040K	1241.20

Universal Joint 1/2" Square Drive

Hinged through 180° in both directions for operation at varying angles. Fitted with a spring-loaded ball bearing socket retainer.



Be)
BERYLLIUN FREE

Overall	Weight	Order Code	Price/1
Length	each	KEN-575	RND
50mm	170g	-7120K	574.10

### Sliding T-Handles

The sliding bar gives many options for leverage within a given space. Fitted with a spring-loaded ball bearing socket retainer.







Square	Overall	Weight	Order Code	Price/1
Drive	Length	each	KEN-575	RND
1/2"	250mm	310g	-7020K	1421.30
3/4"	400mm	980g	-8020K	1632.30

### Speed Brace 1/2" Square Drive

Revolving grip, ideal for nut spinning. Fitted with a spring-loaded ball bearing socket retainer.





### Socket Set 1/2" Square Drive

27, 30 and 32mm.

ATEX (Ex Sockets: 10, 11, 12, 14, 17, 19, 22, 24, BERYLLIUM FREE Accessories: 250mm ratchet wrench,

250mm sliding T-handle, 400mm speed brace, 125 and 250mm socket extensions.



Number of	Weight	Order Code	Price/1
Pieces	each	<b>KEN-575</b>	RND
17	4.50kg	-7500K	11281.70

#### Sockets

12 point bi-hexagon.









Size	Overall Length	Weight each	Order Code <b>KEN-575</b>	Price/1 RND
		1/2"	Drive	
10mm	40mm	71g	-7220K	422.10
<b>11</b> mm	40mm	72g	-7200K	436.30
12mm	40mm	72g	-7230K	452.70
13mm	40mm	73g	-7240K	559.80
14mm	40mm	73g	-7260K	578.60
17mm	40mm	80g	-7280K	634.30
19mm	42mm	100g	-7300K	671.50
21mm	43mm	125g	-7320K	709.40
22mm	43mm	130g	-7330K	737.60
24mm	43mm	170g	-7340K	858.20
27mm	43mm	215g	-7380K	927.20
30mm	46mm	260g	-7400K	1060.20
32mm	46mm	290g	-7420K	1203.70
		3/4"	Drive	
21mm	55mm	245g	-8220K	699.80
24mm	55mm	280g	-8240K	843.10
27mm	55mm	285g	-8260K	1037.30
30mm	60mm	370g	-8280K	1230.30
32mm	60mm	410g	-8300K	1363.20
34mm	60mm	440g	-8320K	1495.40
36mm	60mm	465g	-8340K	1623.10
38mm	60mm	510g	-8360K	1754.30
41mm	65mm	640g	-8380K	1932.90
46mm	65mm	705g	-8400K	2231.50
50mm	70mm	840g	-8420K	2415.10

### Impact Sockets

12-point, for additional torque grip.







Size	Overall Length	Weight each	Order Code KEN-575	Price/1 RND
		3/4"	Drive	
27mm	55mm	360g	-8530K	1083.00
36mm	60mm	565g	-8560K	1684.50
40mm	65mm	765g	-8580K	2376.40
50mm	70mm	1003g	-8590K	2571.90
		1"	Drive	
24mm	60mm	663g	-8820K	1203.30
27mm	60mm	672g	-8830K	1407.90
29mm	60mm	690g	-8840K	1985.30
34mm	70mm	772g	-8870K	2387.00
35mm	70mm	825g	-8880K	2782.50
36mm	70mm	835g	-8890K	3008.40
38mm	70mm	855g	-8900K	3323.90

### Socket Set 3/4" Square Drive

Sockets: 21, 24, 27, 30, 32, 34, 36, 38, 41, 46 and 50mm.

BERYLLIUM



Accessories: 320mm ratchet wrench, 400mm sliding T-handle, 200mm socket extension.



Weight each Number of Order Code KEN-575 Price/1 RND Pieces 19793.00 -8500K 9.10kg

#### Single-Ended



Size (mm)	Overall Length	Weight each	Order Code KEN-580	Price/1 RND
6	77	10g	-1060K	36.30
7 8	78 95	10g 20g	-1070K -1080K	36.30 36.30
9	100	20g 20g	-1090K	36.30
10	105	25g	-1100K	36.30
_11	125	34g	-1110K	36.30
12	125	36g	-1120K	36.30
13	135	44g	-1130K	36.30
14	140	52g	-1140K	36.30
15 17	140 160	49g	-1150K -1170K	36.30 36.30
18	160	57g 65g	-1170K -1180K	36.30 37.80
19	170	86g	-1180K	37.80
22	195	118g	-1220K	37.80
24	205	145g	-1240K	43.50
27	235	225g	-1270K	48.90
30	260	285g	-1300K	64.00
_32_	265	330g	-1320K	58.00
36	300	428g	-1360K	89.00
38	300	424g	-1380K	118.80
<u>41</u> 46	345 375	545g	-1410K -1460K	130.90 233.10
50	410	800g 980g	-1460K -1500K	233.10 271.50
55	455	1260g	-1550K	328.00
60	490	1650g	-1600K	441.00
65	575	1895g	-1650K	546.70
70	570	2340g	-1700K	690.50
75	610	2610g	-1750K	1069.80
80	645	3330g	-1800K	1262.20
_85_	690	3490g	-1850K	1576.80
90 95	850	3455g	-1900K	2033.40 2996.00
_95_	900	3500g	-1950K	2990.00

**Double-Ended** Conform to **DIN 895**.

HAND TOOLS



C: O	٠٨/-:	0 1 0 1	D-1 (4
Size Overall (mm) Length	Weight each	Order Code KEN-580	Price/1 RND
6x7 95	12g	-3060K	47.80
7x8 108	20g	-3080K	47.80
8x9 117	28g	-3100K	47.80
8x10 115	28g	-3140K	47.80
9x11 122	28g	-3180K	48.30
10x11 122	31g	-3200K	47.80
10x13 123	45g	-3240K	51.50
11x13 140	54g	-3280K	51.50
12x13 140	50g	-3300K	51.50
12x14 142	55g	-3320K	60.60
13x14 142	53g	-3340K	64.40
13x15 160	69g	-3360K	64.40
13x17 160	74g	-3380K	64.40
14x15 160	74g	-3420K	65.00
<u>14x17 160</u>	70g	-3460K	74.70
16x18 170	104g	-3540K	75.40
17x19 170	99g	-3580K	75.40
17x 21 193	143g	-3620K	54.40
19x22 195	119g	-3700K	92.80
19x24 205	<u> 191g</u>	-3740K	105.30
22x24 220	216g	-3820K	111.00
24x27 244	257g	-3900K	143.70
24x30 265	283g	-4000K	174.40
30x32 273	450g	-4100K	201.30
30x36 305	528g	-4150K	263.60
32x36 305	534g	-4200K	263.60
36 x 41 340	705g	-4250K	422.90
41x46 380	985g	-4300K	459.00
46x50 420	1170g	-4350K	599.70
50x55 460	1530g	-4400K	811.00
55x60 500	1645g	-4500K	956.60

#### Reversible Ratchet **Podger Spanners**

Chrome vanadium steel. Suitable for heavyduty construction applications. Ratchet action for use in confined spaces. Reversible head has two internal bi-hexagon sizes. Podger wrenches have tapered handle for alignment of fixing holes on jigs and fabrications.



Size	Order Code <b>KEN-580</b>	Price/1 RND
13 & 17mm	-8430K	408.70
17 & 19mm	-8450K	418.80
19 & 24mm	-8460K	561.30
24 & 27mm	-8470K	561.30
27 & 30mm	-8480K	752.10
30 & 32mm	-8490K	752.10

#### Open End Podger Spanners

Designed to engage the nut from the side. As it only engages on two faces of the fastener, care must be taken to ensure that the correct size spanner is always used. Tapered handle for assisting with alignment of fixing holes on jigs and fabrications.



Size	Overall Length	Order Code <b>KEN-580</b>	Price/1 RND
17mm	220	-8510K	92.70
19mm	240	-8520K	104.80
24mm	280	-8530K	126.50
27mm	300	-8540K	155.20
30mm	320	-8550K	201.40
32mm	340	-8560K	236.70
36mm	355	-8570K	275.90
46mm	390	-8590K	435.60

### Ring End Podger Spanners

Cranked handle assists with location of spanner on to fixings within a recess.



Size	Overall Length	Order Code KEN-580	Price/1 RND
17mm	275	-8710K	100.40
19mm	305	-8720K	109.30
24mm	345	-8730K	134.20
27mm	365	-8740K	159.70
30mm	400	-8750K	215.00
32mm	425	-8760K	371.00
36mm	460	-8770K	296.90
46mm	505	-8790K	684.70

#### **Ring Slogging Spanners**

Manufactured from forged and hardened steel with machined drive faces to ensure good contact with the fastener. With flat striking faces to allow hammer blows to be used to loosen or tighten stubborn fasteners. Manufactured to DIN 7444.



Size (mm)	Overall Length	Weight each	Order Code KEN-580	Price/1 RND
		Metric		
24	165	0.40kg	-7010K	92.70
27	180	0.40kg	-7020K	100.20
30	190	0.50kg	-7030K	124.60
32	190	0.50kg	-7040K	174.10
36	205	0.50kg	-7050K	215.40
41	230	0.80kg	-7060K	265.40
46	240		-7000K	369.30
		1.00kg		
50	225	1.10kg	-7080K	617.80
55_	270	1.50kg	-7090K	761.80
60	280	1.80kg	-7100K	770.50
65	300	2.20kg	-7110K	1000.00
70	330	3.30kg	-7120K	1489.70
75	330	3.30kg	-7130K	2458.60
80	360	4.00kg	-7140K	2758.40
85	360	4.00kg	-7150K	2757.20
90	390	5.50kg	-7160K	3430.00
95	420	5.30kg	-7170K	3498.30
			-7170K	
100	420	6.50kg		5643.90 5645.70
105	420	6.50kg	-7190K	5645.70
110	450	8.00kg	-7200K	5665.20
115_	450	7.80kg	-7210K	8071.10
120	480	10.0kg	-7220K	8738.80
125	480	9.70kg	-7230K	11682.00
130	520	13.2kg	-7240K	15410.90
135	520	13.0kg	-7250K	16871.40
140	520	18.5kg	-7260K	24344.50
			-7270K	
145	580	18.5kg		32303.50
150	580	18.2kg	-7280K	34175.20
		Inch		
11/16"	180	0.40kg	-7500K	110.70
11/8"	180	0.40kg	-7510K	112.60
1 <sup>3</sup> / <sub>16</sub> "	190	0.50kg	-7520K	124.30
11/4"			-7520K	
	190	0.50kg		174.80
15/16"	190	0.50kg	-7540K	174.80
<u> 13/8"</u>	205	0.50kg	-7550K	215.10
1 <sup>7/</sup> 16"	205	0.50kg	-7560K	218.90
11/2"	205	0.50kg	-7570K	220.30
<b>1</b> %16"	230	0.80kg	-7580K	265.30
15/8"	230	0.80kg	-7590K	259.20
111/16"	230	0.80kg	-7600K	272.40
13/4"	240	1.00kg	-7610K	285.90
113/16"	240	1.00kg	-7620K	369.60
17/8"			-7620K	369.90
	240	1.00kg		
<u> 115/16"</u>	225	1.10kg	-7640K	617.80
2"	225	1.10kg	-7650K	620.30
2 <sup>1/</sup> 16"	225	1.10kg	-7660K	634.80
21/8"	270	1.50kg	-7670K	761.90
23/16"	270	1.50kg	-7680K	764.90
21/4"	270	1.50kg	-7690K	769.90
2 <sup>5</sup> / <sub>16</sub> "	280	1.80kg	-7700K	770.40
23/8"	280	1.80kg	-7710K	774.30
2 <sup>7</sup> / <sub>16</sub> "		1.80kg	-7720K	800.20
∠''16 21/-"	280	T.00Kg		
2½"	300	2.20kg	-7730K	812.50
29/16"	300	2.20kg	-7740K	1000.00
25/8"	300	2.20kg	-7750K	1489.00
23/4"	330	3.30kg	-7760K	<u>1510.00</u>
213/16"	330	3.30kg	-7770K	2164.50
27/8"	330	3.30kg	-7780K	2071.10
2 <sup>15</sup> /16"	330	3.30kg	-7790K	2204.90
3"	330	3.30kg	-7800K	1357.00
3 <sup>1</sup> /8"	360	4.50kg	-7810K	1877.20
31/4"	360	4.50kg	-7820K	4897.40
3½"	390	5.50kg	-7840K	4876.80
35/8"	420	5.30kg	-7850K	6173.40
37/8"	420	6.50kg	-7870K	6501.30
41/4"	450	8.00kg	-7900K	7720.50
45/8"	450	7.80kg	-7920K	2554.20
VOIII	DIG	TRIRIII	TOP .	

### WORKSHOP SPANNERS/SCAFFOLDING TOOLS





### **Open Jaw Slogging Spanners**

Forged and hardened steel. Flat striking faces to allow hammer blows to be used to loosen or tighten stubborn fasteners. To **DIN 133**.



Size	Overall	Weight	Order Code	Price/1
(mm)	Length	each	<b>KEN-580</b>	RNĎ
	. 0	Metri	C	
24	180	0.40kg	-6010K	141.60
27	180	0.40kg	-6020K	142.40
30	190	0.50kg	-6030K	164.70
32	190	0.50kg	-6040K	180.90
36	215	0.50kg	-6050K	199.10
41	235	0.90kg	-6060K	260.40
46	225	1.20kg	-6070K	300.50
50	275	1.20kg	-6080K	445.10
55	300	1.90kg	-6090K	684.20
60	320	2.60kg	-6100K	727.40
65	340	3.40kg	-6110K	955.80
70	375	4.40kg	-6120K	1049.70
75	375	4.40kg	-6130K	1139.20
80	410	6.30kg	-6140K	1608.00
85	410	6.30kg	-6150K	1951.60
90	445	7.30kg	-6160K	2695.20
95	445	7.30kg	-6170K	2668.30
100	485	12.2kg	-6180K	2976.90
105	485	12.2kg	-6190K	5079.90
110	510	13.5kg	-6200K	5781.60
115	510	13.5kg	-6210K	5781.60
	310			3701.00
		Inch		
11/16"	180	0.40kg	-6500K	188.00
<b>1</b> ½"	180	0.40kg	-6510K	192.00
<b>1</b> 3/16"	190	0.40kg	-6520K	219.30
11/4"	190	0.50kg	-6530K	230.20
1 <sup>5/</sup> 16"	215	0.50kg	-6540K	268.20
13/8"	215	0.50kg	-6550K	282.40
17/16"	215	0.55kg	-6560K	293.40
1 <sup>1</sup> / <sub>2</sub> "	235		-6570K	
		0.55kg		300.00
19/16"	235	0.55kg	-6580K	310.90
15/8"	235	0.90kg	-6590K	338.40
1 <sup>11/</sup> 16"	255	0.90kg	-6600K	347.50
13/4"	225	0.90kg	-6610K	385.40
113/16"	225	1.20kg	-6620K	400.00
1 <sup>7/</sup> 8"	225	1.20kg	-6630K	420.50
115/16"	275	1.50kg	-6640K	465.80
2"	275	1.50kg	-6650K	465.80
2 <sup>1/</sup> 16"	275	1.50kg	-6660K	684.50
21/8"				
	300	1.70kg	-6670K	684.50
23/16"	300	1.90kg	-6680K	690.40
21/4"	300	1.90kg	-6690K	700.00
25/16"	320	2.60kg	-6700K	720.00
23/8"	320	2.60kg	-6710K	727.00
2 <sup>7/</sup> 16"	320	2.60kg	-6720K	733.40
21/2"	340	3.40kg	-6730K	840.00
29/16"	340	3.40kg	-6740K	955.40
25/8"	340	3.40kg	-6750K	1000.00
23/4"	375	4.40kg	-6760K	1049.40
213/16"	375	4.40kg	-6770K	1200.00
2 <sup>7</sup> /8"	375	4.40kg	-6780K	1340.90
215/16"	375	4.40kg	-6790K	1808.20
3"	375	4.40kg	-6800K	2129.30
31/8" AF	410	6.30kg	-6810K	2509.50
31/2" AF	445	7.30kg 7.30kg	-6840K	3094.50
35/8" AF	445	7.30kg	-6850K	3077.10
37/8" AF	485	12.20kg	-6870K	3570.90
41/4" AF	510	13.50kg	-6900K	3974.40
	010	20.0016		

### **C-Hook Spanners**

Chrome vanadium steel. Specifically designed for use with slotted retaining rings. Conform to DIN 1810A.

Order Code KEN-580 Price/1 RND Range Overall Weight (mm) Length each -5160K 16/20 108 20g 118.30 25/28 135 45g 5250K 110.30 170 170 -5340K 34/36 118.10 90g 40/42 95g -5400K 118.20 45/50 205 160g -5450K 132.90 52/55 58/62 132.80 157.20 165g 270g 270g -5520K 205 -5580K 240 68/75 240 157.20 -5680K 80/90 410g -5800K 196.60

#### **Scaffolding Tools**

Manufactured to surpass the performance test BS2558: 1954. The sockets locate directly onto the handle relieving stress on the rivet. All sockets are plated, hardened and stress relieved to ensure they retain their shape.

#### **Double Ended Swing Over Spanner**

Swingover handle spanner with a 1/16" Whitworth socket end and 1/2" socket end for use on fixings. Suitable for use with all popular scaffold fixings used in the UK.



Socket	Weight each	Order Code	Price/1
Size		KEN-580	RND
<sup>7/</sup> 16"W x <sup>1/</sup> 2"W	545g	-9040K	236.90

#### **Spinner Head Spanner**

The handle is produced from a one piece drop forging with a 7/16" and 1/2" Whitworth double ended socket for use on fixings. Features a taper podger end used to line up holes and manipulate fixings. Rotating socket offers a single tool for two fastener sizes.



Overall length: 245mm. <sup>7/</sup>16"W x <sup>1/</sup>2"W. Socket size:

Socket Size	Weight each	Order Code KEN-580	Price/1 RND
7/16"W x 1/2"W	490g	-9080K	271.20

#### **Combination Podger Spanner**

Swingover handle spanner with a 7/16" Whitworth socket end for use on fixings. Features a cranked taper square podger end for use on eyebolt and jacking collars.






Socket	Weight	Order Code	Price/1
Size	each	KEN-580	RND
7/ <sub>16</sub> "W	430g	-9060K	159.20

#### **Podger Hammer**

Manufactured from a one piece forging. Features a hammer end and cranked round taper podger end used to line up holes and manipulate fixings.



Head	Weight	Order Code	Price/1
Diameter	each	KEN-580	RND
35mm	660g	-9100K	333.90

#### **Scaffold Kev**

Manufactured with a hook end and cranked taper square podger end for aligning and tightening eyebolts, jacking collars and loop fixings, both ends are hardened and tempered to improve tool life.

Overall length:	305mm.
Bar diameter:	15mm.
Head width:	20mm.

Head Width	Weight each	Order Code KEN-580	Price/1 RND
20mm	460g	-9070K	112.20

#### **Single Ended Swing Over Spanners**

Single ended swingover handle spanners. Available in 7/16" or 1/2" Whitworth socket end size for use on fixings.








Size	Bar Dia.	Туре	Order Code KEN-580	Price/1 RND
7/16"	15mm	Standard	-9020K	141.30
<sup>7</sup> /16"	15mm	Heavy Duty	-9010K	325.50
<sup>7/</sup> 16"	15mm	Chunky	-9050K	147.50
1/2"	20mm	Standard	-9030K	133.80



Manufactured from high quality steel tube. Zinc plated for corrosion resistance, each supplied with tommy bar.







Metric					
Size	Length (mm)	Weight each	Order Code <b>KEN-581</b>	Price/1 RND	
6 x 7	102	40g	-1060K	14.70	Ī
8 x 9	105	60g	-1080K	15.50	
10 x 11	103	70g	-1100K	19.30	
12 x 13	102	80g	-1120K	23.00	
14 x 15	125	140g	-1140K	24.60	
16 x 17	127	175g	-1160K	27.20	
18 x 19	130	190g	-1180K	35.50	Τ
20 x 21	127	190g	-1200K	45.40	
22 x 23	150	415g	-1220K	48.30	
24 x 25	150	420g	-1240K	65.70	_
26 x 27	150	425g	-1270K	70.30	

AF				
Size	Length (mm)	Weight each	Order Code <b>KEN-581</b>	Price/1 RND
1/4" x 5/16"	103	60g	-1530K	24.00
<sup>5/</sup> 16" X <sup>3/</sup> 8"	100	60g	-1550K	24.90
<sup>3/</sup> 8" x <sup>7/</sup> 16"	100	60g	-1560K	26.90
<sup>1</sup> / <sub>2</sub> " x <sup>9</sup> / <sub>16</sub> "	125	145g	-1580K	30.20
9/ <sub>16</sub> " x <sup>5/</sup> 8"	127	150g	-1600K	34.80
11/ <sub>16</sub> " x 3/ <sub>4</sub> "	125	185g	-1630K	39.50

ВА					
Siz		ength (mm)	Weight each	Order Code <b>KEN-581</b>	Price/1 RND
2 :	x 3	76	45g	-2220K	17.70
4 :	x 5	76	35g	-2240K	17.70
6 :	x 7	79	25g	-2260K	17.70
8 :	x 9	79	20g	-2280K	17.70
10 :	x 10	79	15g	-2300K	17.70

#### Sets

**7 Piece Metric:** 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17 and 18 x 19mm.

**6 Piece AF:**  $\frac{1}{4}$ " x  $\frac{5}{16}$ ",  $\frac{5}{16}$ " x  $\frac{3}{8}$ ",  $\frac{3}{8}$ " x  $\frac{7}{16}$ ",  $\frac{1}{2}$ " x  $\frac{9}{16}$ ",  $\frac{9}{16}$ " x  $\frac{5}{8}$ " and  $\frac{11}{16}$ " x  $\frac{3}{4}$ ".

6 Piece BA: 0 x 1, 2 x 3, 4 x 5, 6 x 7, 8 x 9, 10BA.



Number of Pieces	Weight	Order Code	Price/1
	each	KEN-581	RND
7 Metric	600g	-1450K	212.70
6 Inch	475g	-1950K	315.00
6 BA	175g	-2350K	247.20

HAND TOOLS



Chrome vanadium steel with mirror polish finish, preventing oil and dirt from adhering to the spanner, making for easier cleaning and preventing rust. 72-teeth ratcheting system which needs only 5° movement to operate ratchet. Thin wall design for greater access. Conform to ASME B107.6.



Size (mm)	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
8	135	38g	-2158K	146.70
10	155	65g	-2160K	155.70
11	160	75g	-2162K	177.90
12	172	85g	-2164K	191.50
13	180	95g	-2166K	191.50
14	190	115g	-2168K	222.20
15	200	135g	-2170K	222.70
16	215	155g	-2172K	258.20
17	230	200g	-2174K	273.80
18	240	210g	-2175K	301.40
19	245	235g	-2176K	307.70
21	285	350g	-2177K	369.40
22	285	340g	-2178K	388.60
24	325	475g	-2179K	390.40
25	325	480g	-2252K	392.80
26	325	465g	-2253K	395.10
27	355	600g	-2254K	399.90
28	360	600g	-2255K	432.00
30	420	918g	-2257K	454.00
32	425	880g	-2259K	475.90

ŀ	١	-	
			ı

<b>~</b> !				
Size (AF)	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
3/8"	160	60g	-2144K	204.10
<sup>7/</sup> 16"	168	70g	-2146K	211.00
1/2"	179	90g	-2148K	226.50
9/16"	198	115g	-2150K	239.60
5/8"	214	150g	-2152K	267.90
11/16"	232	185g	-2154K	282.50
3/4"	250	225g	-2156K	309.90

Set 9 Piece Metric: 10, 11, 12, 13, 14, 15, 16, 17 and 19mm. **7 Piece AF:** 3/8", 7/16", 1/2", 9/16", 5/8", 11/16" and 3/4".



#### Ratchet Combination Spanner Set with Sockets

RCS23M - 4 in 1: This wrench set for 10 to 19mm applications comprises open ended wrenches, ratchet ring wrenches, Go-Thru™ single hex ratchet wrenches and ¼", ¾8" and ½" square drive ratchets. All are made from chrome vanadium and are fully plated with a mirror finish. Supplied in a heavy duty fitted metal storage case with locking lid and carry handle.



#### **Ratchet Comination Spanner Set** with Sockets

Number of Pieces	Weight each	Order Code KEN-582	Price/1 RND
23	3.00kg	-3980K	1839.30

#### **Square Drive Adaptors**

Size	Order Code KEN-582	Price/1 RND
1/4" SD (x10mm hex) 3/8" SD (x13mm hex) 1/2" SD (x19mm hex)	-4210K	68.50
3/8" SD (x13mm hex)	-5195K	70.20
<sup>1</sup> / <sub>2</sub> " SD (x19mm hex)	-6705K	71.10

#### 4-in-1 Spanner

Open

ended

spanner



Ratchet for use with Go-Thru™ Sockets (supplied)



### Square Drive Ratchet for use with

#### Go-Thru™ Sockets

Size	Order Code KEN-582	Price/1 RND
10mm	-3740K	35.90
<b>11</b> mm	-3741K	36.40
12mm	-3742K	38.40
13mm	-3743K	39.70
14mm	-3744K	41.30
15mm	-3745K	47.70
16mm	-3746K	49.70
17mm	-3747K	53.60
18mm	-3748K	56.60
19mm	-3749K	57.90

#### **Professional Reversible Combination Spanners**



Bi-hexagonal 15° offset rings with a 72 teeth lever ratcheting system that requires only 5 degree movement to operate, making them ideal for use in tight areas. Made from high quality Chrome Vanadium Steel with mirror polish finish to prevent oil and dirt from adhering to the spanner. Conform to ASME B107.6.



'Flush' fitted reversible switch enables the wrench to move in either direction without sacrificing the overall compact surface of the box end.



9 Piece Metric: 10, 11, 12, 13, 14, 15, 16, 17 and 19mm.



(	r	Y	۱r	Υ	1	

HAND

Metric				
Size (mm)	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
8	135	32g	-6808K	251.10
10	155	56g	-6810K	266.20
11	160	68g	-68 <b>11</b> K	275.70
12	172	78g	-6812K	296.70
13	180	96g	-6813K	308.80
14	190	116g	-6814K	329.40
15	200	136g	-6815K	340.60
16	215	160g	-6816K	364.20
17	230	182g	-6817K	380.10
18	240	200g	-6818K	412.70
19	245	248g	-6819K	427.60
21	285	540g	-6821K	498.70
22	285	540g	-6822K	528.80
24	325	710g	-6824K	579.80

Number of Pieces	Weight	Order Code	Price/1
	each	KEN-582	RND
9 Metric	1.2kg	-6796K	2974.00

#### Professional Flex-Head Ratchet Combination Spanners

Chrome vanadium steel with mirror polish finish, preventing oil and dirt from adhering to the spanner, making for easier cleaning and preventing rust. 72-teeth ratcheting system which needs only 5° movement to operate ratchet. Thin wall design for greater access. Head flexes up to 90° in either direction. Conform to **ASME B107.6**.



Set (right) contains spanners and ratchet units which combine to make a set of square drive ratchets for use with standard sockets (supplied separately)



## **Metric Ratchet Combination Spanners**

Size Overall	Weight	Order Code	Price/1
(mm) Length	each	KEN-582	RNĎ
10 160mm	58g	-2240K	155.70
11 168mm	80g	-2241K	177.90
12 179mm	90g	-2242K	191.50
13 180mm	105g	-2243K	191.50
14 192mm	130g	-2244K	191.50
_15 200mm	152g	-2245K	222.70
16 215mm	182g	-2246K	258.20
17 233mm	213g	-2247K	273.80
18 237mm	230g	-2248K	301.40
19 249mm	271g	-2249K	307.70

#### Flex-Head Ratchet Combination **Spanner Set With Adaptors**

Contains:


Flex head ratchet combimation spanners: 10, 11, 12, 13, 14, 15, 16, 17 and 19mm. Quick release square drive adaptors -  $^{1}\!/_{4}"$  SD (x10mm hex);  $^{3}\!/_{8}"$ SD (x13mm hex); 1/2" SD (x19mm hex). Supplied in a heavy duty fitted storage case.





Weight each Number KEN-582 of Pieces RND -2250K 10 Metric 2600g 1724.90

#### **Short Arm Ratchet Combination Spanners**







#### Sets

9 Piece Metric:

10, 11, 12, 13, 14, 15, 16, 17 and 19mm.

7 Piece AF:

<mark>3/8", 7/<sub>16</sub>", 1/2", 9/<sub>16</sub>", 5/</mark>8", <sup>11/</sup><sub>16</sub>" and <sup>3/</sup>4".



AF				
Size Inch	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
3/8"	97	45g	-2180K	150.30
<sup>7/</sup> 16"	113	85g	-2181K	154.90
1/2"	108	70g	-2182K	171.00
9/16"	114	85g	-2183K	175.90
5/8"	120	110g	-2184K	196.60
<sup>11</sup> / <sub>16</sub> "	127	120g	-2185K	207.10
3/4"	135	155g	-2186K	227.60



Number of Pieces	Weight	Order Code	Price/1
	each	KEN-582	RND
9 Metric	1880g	-2236K	1428.10
7 AF	770g	-2228K	1383.60

#### Short Arm Combination Spanners

Manufactured from quality chrome vanadium steel with hardened jaws and high polish mirror finish, corrosion-resistant and easy to clean. The jaws and ring are offset at 15° for easier location and application of torque to the fastener. Suitable for use in areas of very restricted access. Conforms to **ASME B107.6**.





#### Metric

Metric

Size

(mm)

10

11

12 13

14

15 16 17

19

100

103

106

114

117 120 127

138

Size (mm)	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
10 11	97 100	30g 40g	-2200K -2202K	65.90 65.90
12 13 14	105 110 114	43g 51g 65g	-2204K -2206K -2208K	65.90 65.90 72.90
15	119	75g	-2210K	74.40
16 17 18	124 130 133	85g 95g 110g	-2212K -2214K -2216K	80.50 86.10 89.80
19	140	130g	-2218K	99.40

**10 Piece Metric:** 10, 11, 12, 13, 14, 15, 16, 17, 18 and 19mm.

10 **PIECES** 



Number of Pieces	Weight	Order Code	Price/1
	each	KEN-582	RND
10 Metric	840g	-2225K	688.10

**HAND TOOLS** 

#### **Wall Drive Ring End Feature**

The wall drive ring end feature has no points on the internal bi-hexagon ring end. This is achieved by a series of radii

that gives a wavy look to the internal bi-hexagon ring end.

The internal radii design promotes the use of higher torque loads to be applied to the fastener through increased surface contact areas.





Fig.1 shows the point loads that occur with standard contact wrenches.

Fig.2 shows the increased surface contact area loads of wrenches with wall drive feature.

The increased contact surface area has three main advantages: Helps to reduce stress to the tool, prolonging tool life. Increases the tightening torque transmission force that can be applied to fasteners. Prevents fastener damage,

e.g. 'rounding off'.



#### **Professional Combination Spanners**

Manufactured from chrome vanadium steel with highly polished mirror finish. Mirror finish prevents oil and dirt from adhering to the spanner making for easier cleaning and preventing rust. Long reach, wall drive. Conform with ANSE B107.6.





#### Metric

HAND TOOLS

Size	Overall	Weight	Order Code	Price/1
(mm)	Length	each	KEN-582	RNĎ
6	130	26g	-3060K	43.30
7	136	30g	-3070K	43.30
8	148	35g	-3080K	43.60
9	167	53g	-3090K	43.90
10	172	57g	-3100K	44.10
11	186	70g	-3110K	45.30
12	197	80g	-3120K	45.50
13	207	88g	-3130K	48.30
14	223	119g	-3140K	<b>51</b> .70
15	233	133g	-3150K	53.20
16	243	145g	-3160K	54.20
17	261	179g	-3170K	57.00
18	270	199g	-3180K	60.90
19	280	220g	-3190K	65.50
20	290	323g	-3200K	71.50
21	301	323g	-3210K	86.20
22	318	361g	-3220K	88.40
23	325	400g	-3225K	91.10
24	338	443g	-3230K	94.80
25	350	540g	-3231K	98.80
26	350	525g	-3232K	99.70
27	370	610g	-3233K	109.50
28	370	585g	-3234K	117.30
29	400	715g	-3235K	127.20
30	400	735g	-3236K	137.80
32	430	915g	-3237K	156.70

	_
А	•

AF				
Size (AF)	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
11/32"	143	32g	-3239K	49.20
1/4"	130	26g	-3240K	49.20
5/16"	148	35g	-3250K	51.20
3/8"	167	53g	-3260K	64.60
<sup>7/</sup> 16"	186	70g	-3270K	66.50
1/2"	207	88g	-3280K	74.90
9/16"	223	119g	-3290K	86.80
5/8"	243	145g	-3300K	101.80
<sup>11/</sup> 16"	261	179g	-3310K	106.10
3/4"	280	220g	-3320K	111.10
13/16"	297	296g	-3330K	159.70
7/8"	320	350g	-3340K	174.80
15/16"	340	435g	-3350K	196.60
1"	355	510g	-3360K	220.70

**14 Piece Metric:** 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18 and 19mm.

14\* Piece Metric: 6, 8, 9, 10, 13, 14, 15, 17, 19, 22, 24, 27, 30 and 32mm.

**18 Piece Metric:** 6, 7, 8, 9, 10, 11, 12, 13, 14,15, 16, 17, 18, 19, 20, 21, 22, and 24mm.

**26 Piece Metric:** 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30 and 32mm.

9 Piece AF: 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16" and 3/4".

**13 Piece AF:** 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", <sup>7</sup>/<sub>8</sub>", <sup>15</sup>/<sub>16</sub>" and 1".



Number of Pieces	Weight each	Order Code <b>KEN-582</b>	Price/1 RND
14 Metric	1.65kg	-3960K	1109.90
14* Metric	4.60kg	-3972K	2681.00
18 Metric	2.85kg	-3970K	1797.10
26 Metric	8.90kg	-3974K	3111.30
9 AF	1.00kg	-3920K	900.00
13 AF	1.95kg	-3930K	1620.20

**EXTENDED** 

RANGE

#### Industrial Combination Spanners



Manufactured from chrome vanadium steel with a satin finish body and highly polished heads. 15° open jaw angle to shank and ring end offset. Conform to: 5.5mm - 25mm,  $\frac{1}{4}$ " - 1" AF - **DIN 3113**. 26mm - 95mm,  $1\frac{1}{4}$ 6" - 2"AF - **ASME B107.6**.  $\frac{1}{8}$ 8" -  $\frac{1}{4}$ 2" Whitworth - **DIN 3113** & **BS192:1982**.  $\frac{9}{16}$ 6" -  $\frac{7}{8}$ 8" Whitworth - **ASME B107.6** & **BS192:1982**.



Metric	;			
Size		Weight	Order Code	Price/1
(mm)	Length	each	KEN-582	RND
5.5	93	10g	-2560K	21.30
6	100	14g	-2570K	37.60
7	110	18g	-2580K	37.60
- 8	120	27g	-2590K	37.90
9	130	33g	-2600K	38.10
10	140	36g	-2610K	38.30
11	150	47g	-2630K	39.40
12	160	55g	-2640K	39.60
13	170	66g	-2660K	42.00
14	180	82g	-2670K	45.00
15	190	90g	-2680K	46.30
16	200	107g	-2690K	47.10
17	210	130g	-2700K	49.60
18	220	138g	-2710K	53.00
19	230	159g	-2720K	57.00
20	240	185g	-2730K	62.20
21	250	193g	-2740K	80.60
22	260	225g	-2750K	80.60
23	260	265g	-2760K	77.30
24	280	294g	-2770K	82.40
25	295	330g	-2780K	85.90
26	295	435g	-2790K	86.70
27	310	387g	-2800K	95.30
28	340	675g	-2810K	102.00
29	340	1280g	-2850K	119.80
30	340	675g	-2820K	122.10
32	360	485g	-2830K	136.20
36	410	600g	-2840K	354.50
38	430	1280g	-2860K	369.00
41	460	1800g	-2870K	426.90
46	500	1900g	-2880K	602.70
50	540	2350g	-2890K	731.50
55	560	3085g	-2891K	822.00
60	600	3750g	-2892K	957.90
65	675	5700g	-2893K	1105.60
_70	675	5400g	-2894K	1201.10
75	720	5700g	-2895K	1271.60
80	720	6500g	-2896K	1602.70
85	730	6800g	-2897K	4539.40
90	730	7000g	-2898K	4539.40
95	750	7200g	-2899K	4539.40

Manufactured from chrome vanadium steel (except \* which is made from drop forged carbon steel) with a satin finish body and highly polished heads.

AF				
Size	Overall	Weight	Order Code	Price/1
(AF)	Length	each	KEN-582	RNÓ
1/4"	100	14g	-2260K	23.40
5/16"	120	27g	-2270K	23.40
3/ <sub>8</sub> "	140	33g	-2280K	25.30
7/16"	150	47g	-2290K	28.70
1/2"	170	66g	-2300K	33.90
9/16"	180	82g	-2310K	44.00
5/8"	200	107g	-2320K	51.10
<sup>11/</sup> 16"	210	138g	-2340K	57.30
3/4"	230	159g	-2350K	66.80
7/8"	260	225g	-2360K	74.50
<sup>13/</sup> 16"	250	268g	-2370K	75.40
15/16"	280	294g	-2380K	96.20
1"	295	330g	-2390K	122.20
1 <sup>1/</sup> 16"*	358	540g	-2400K	123.80
<u>11/8"*</u>	380	675g	-2410K	125.80
14"*	418	820g	-2420K	157.50
1 <sup>5/</sup> 16"*	461	972g	-2430K	244.30
1 <sup>3</sup> /8"*	461	972g	-2440K	338.00
1 <sup>7</sup> /16"*	486	1280g	-2450K	395.50
11/2"*	486	1280g	-2460K	433.60
<u>15/8"*</u>	540	1800g	-2470K	480.50
13/4"*	611	1900g	-2480K	563.70
1 <sup>7/</sup> 8"*	611	2350g	-2490K	635.00
2"*	611	2350g	-2500K	830.00

Sets			
Number of Pieces	Weight each	Order Code KEN-582	Price/1 RND
11 Metric	2.60kg	-2980K	2630.40
14 Metric	3.10kg	-2900K	987.40
14* Metric	1.20kg	-2960K	612.80
18 Metric	2.20kg	-2970K	935.40
26 Metric	5.75kg	-2910K	1803.50
09 AF	0.80kg	-2920K	492.20
11 AF	2.65kg	-2940K	2460.70
12 AF	1.80kg	-2930K	743.00
7 Whitworth	0.95kg	-2950K	419.80

#### Whitworth

Size Whit	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
1/8"	140	30g	-3370K	34.70
3/16"	160	50g	-3380K	34.70
1/4"	180	65g	-3390K	38.40
5/16"	200	97g	-3400K	47.90
3/ <sub>8</sub> "	220	150g	-3410K	63.80
<sup>7/</sup> 16"	250	200g	-3420K	68.10
1/2"	280	228g	-3430K	90.20
9/16"*	332	430g	-3440K	101.70
5/8"*	380	690g	-3450K	135.40
11/16"*	418	885g	-3460K	134.80
3/4"*	461	850g	-3470K	163.20
7/8"*	486	930g	-3480K	195.20

#### Sets:

**11 Piece:** 26, 27, 28, 29, 30, 32, 36, 38, 41, 46 and 50mm

**14 Piece:** 6, 8, 9, 10, 13, 14, 15, 17, 19, 22, 24, 27, 30 and 32mm. **14\* Piece:** 6, 7, 8, 9, 10, 11, 12, 13, 14,

15, 16, 17, 18 and 19mm.

**18 Piece:** 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22 and 24mm.

**26 Piece:** 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30 and 32mm.

9 Piece AF:

<mark>1/4", 5/16", 3/8",</mark> 7/16", 1/2", 9/16", 5/8<mark>", 11/16"</mark> and 3/4"

**11 Piece AF:** \*1 <sup>1</sup>/<sub>16</sub>", \*1 <sup>1</sup>/<sub>8</sub>", \*1 <sup>1</sup>/<sub>4</sub>", \*1 <sup>5</sup>/<sub>16</sub>", \*1 <sup>3</sup>/<sub>8</sub>", \*1 <sup>7</sup>/<sub>16</sub>", \*1 <sup>1</sup>/<sub>2</sub>", \*1 <sup>5</sup>/<sub>8</sub>" \*1 <sup>3</sup>/<sub>4</sub>", \*1 <sup>7</sup>/<sub>8</sub>" and \*2".

**12 Piece:** <sup>1</sup>/<sub>4</sub>", <sup>5</sup>/<sub>16</sub>", <sup>3</sup>/<sub>8</sub>", <sup>7</sup>/<sub>16</sub>", <sup>1</sup>/<sub>2</sub>", <sup>9</sup>/<sub>16</sub>", <sup>5</sup>/<sub>8</sub>", <sup>11</sup>/<sub>16</sub>", <sup>3</sup>/<sub>4</sub>", <sup>7</sup>/<sub>8</sub>", <sup>15</sup>/<sub>16</sub>" and 1".

7 Piece Whitworth: 1/8", 3/16", 1/4", 5/16" 3/8", 7/16" and 1/2".

### **Industrial Offset Combination Spanners**

Chrome vanadium steel. 15° cranked open end. Offset ring end. Up to 25% longer than conventional **DIN 3113** combination spanners. Conform to DIN 3113B.



Metric				
Size (mm)	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
6	127	20g	-3880K	39.50
7	135	25g	-3881K	40.30
8	145	35g	-3882K	40.50
9	155	40g	-3883K	40.80
10	167	50g	-3884K	41.60
11	173	55g	-3885K	44.10
12	180	65g	-3886K	44.20
13	195	80g	-3887K	46.30
14	210	95g	-3888K	48.20
15	215	110g	-3889K	51.70
16	230	135g	-3890K	55.70
17	240	160g	-3891K	58.60
Size (mm)	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
18	255	170g	-3892K	62.60
19	265	190g	-3893K	68.80
21	280	240g	-3894K	78.40
22	300	275g	-3895K	83.00
24	320	350g	-3896K	93.30
27	340	565g	-3897K	113.60
30	360	665g	-3878K	145.40

665g

821g

-3879K

380

32


#### Set

**14 Piece Metric:** 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, and



Made from chrome vanadium steel with polished head and 15° offset. Conform to ASME B107.6.



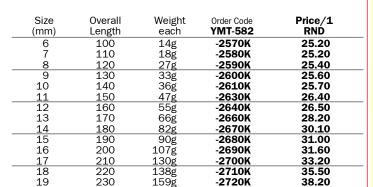

Set 14 Piece Metric: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, and 19mm.

No of	Weight	Order Code	Price/1
Pieces	each	YMT-582	RND
14 Metric	1.60kg	-2960K	437.20

## SENATOR Combination Spanners

HAND TOOLS

Manufactured from drop forged steel with 15° cranked heads. Conform to ASME B107.6.






Size (mm)	Overall Length	Weight each	Order Code SEN-582	Price/1 RND
6	100	10g	-2570K	16.90
7	110	14g	-2580K	16.90
8	120	18g	-2590K	17.00
9	130	33g	-2600K	17.20
10	140	36g	-2610K	17.20
11	150	47g	-2630K	17.70
12	160	55g	-2640K	17.80
13	170	66g	-2660K	18.90
14	180	82g	-2670K	20.20
15	190	90g	-2680K	20.80
16	200	107g	-2690K	21.20
17	210	130g	-2700K	22.30
18	220	138g	-2710K	23.80
19	230	159g	-2720K	25.60



No. of

Pieces 14 Metric



#### E-Torx® Ring Spanners


Manufactured from drop forged chrome vanadium steel. Polished finish. Set is supplied in wallet with hanging holes.



Size	Weight each	Order Code <b>KEN-582</b>	Price/1 RND
E6 x E8	16g	-1200K	47.00
E10 x E12	38g	-1210K	52.80
E14 x E18	81g	-1220K	68.30
F20 x F24	156g	-1230K	96.40

#### Set 4 Piece E-Torx: E6 x E8, E10 x E12





Number of Pieces	Weight	Order Code	Price/1
	each	KEN-582	RND
4	440g	-1240K	280.90



#### 12-In-1 Reversible **Ratchet Spanners**



Double ended ratchet spanners with 12 sizes each. These spanners fit mm, inch and E-TORX fasteners saving space and weight in the toolbox. The 72 teeth lever ratcheting system requires only 5 degree movement to operate making them ideal for use in tight areas. Made from high quality chrome vanadium steel with mirror polish finish to prevent oil and dirt from adhering to the spanner.




#### Sizes (Per Spanner):

8, 10, 11 & 13mm/5/16" 3/8" 7/16" & 1/2"/E10, E12, E14 & E16 14, 16, 17 & 19mm/ $^{9}/_{16"}$   $^{5}/_{8"}$   $^{11}/_{16"}$   $^{3}/_{4"}$ /E18, E20, E22 & E24

#### Metric

Size	Overall	Weight	Order Code	Price/1
Range (mm)	Length	each	KEN-582	RND
8 - 13	160	97g	-6862K	434.00
14 - 19	230	263g	-6864K	485.10

#### 2 Piece Set: One of each as left

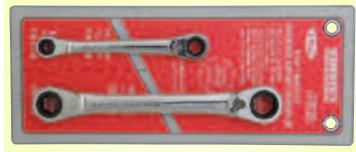

Number of Pieces	Weight each	Order Code <b>KEN-582</b>	Price/1 RND
2 Pieces	380g	-6870K	919.00

#### 4-In-1 Reversible Ratchet Spanners

Double ended ratchet spanners with 4 sizes each, saving space and weight in the toolbox. 72 teeth lever ratcheting system that requires only 5° movement to operate, making them ideal for use in tight areas. Made from high quality chrome vanadium steel with mirror polish finish to prevent oil and dirt from adhering to the spanner.



'Flush' fitted reversible switch enables the wrench to move in either direction without sacrificing the overall compact surface of the box end.



#### Metric

Size Range (mm)	Overall Length	weight each	Order Code KEN-582	Price/1 RND
8 - 13	160	97g	-6852K	331.80
9 - 15	180	125g	-6854K	357.30
16 - 19	230	263g	-6856K	408.50

#### 3 Piece Set

The most commonly used 12 sizes in just three spanners, 8 - 19mm. Supplied with storage roll.

Sizes (per spanner): 8, 10, 12 & 13mm. 9, 11, 14 & 15mm. 16, 17, 18 & 19mm.



Number of Pieces	Weight	Order Code	Price/1
	each	KEN-582	RND
3 Metric	510g	-6860K	1097.50

#### Reversible Ratchet **Ring Wrenches**



For use where access is limited. With a built-in ratchet mechanism to provide speed and a reversible action which can be achieved by depressing the reversing lever or by simply turning the wrench over. All ratcheting ring wrenches are manufactured from chrome vanadium steel bi-hex rings.

#### Straight



Metric				*Single hexagon
Size	Overall	Weight	Order Code	Price/1
(mm)	Length	each	KEN-582	RND
6* x 7*	115	65g	-9720K	106.90
8 x 9	135	80g	-9721K	111.60
10 x 11	140	90g	-9722K	118.70
12 x 13	175	170g	-9723K	173.30
14 x 15	210	270g	-9724K	177.10
17 x 19	210	260g	-9725K	201.70
21 x 22	240	305ชั	-9726K	206 40

AF			
Size	Weight	Order Code	Price/1
(AF)	each	KEN-582	RND
<sup>1</sup> / <sub>4</sub> "* x <sup>5</sup> / <sub>16</sub> "	60g	-9732K	106.90
<sup>3/</sup> 8" x <sup>7/</sup> 16"	90g	-9733K	118.70
¹⁄2" x <sup>9</sup> ∕16"	160g	-9734K	177.10
<sup>5</sup> / <sub>8</sub> " x <sup>11</sup> / <sub>16</sub> "	270g	-9735K	201.70
<sup>3/</sup> 4" x <sup>7/</sup> 8"	305g	-9736K	208.80

**7 Piece Metric:** 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 17 x 19 and 21 x 22mm

**5 Piece AF:** ½" x 5/16", 3/8" x 7/16", ½" x 9/16", 5/8" x 11/16" and 3/4" x 7/8"



HAND TOOLS

Number of Pieces	Weight	Order Code	Price/1
	each	<b>KEN-582</b>	RND
7 Metric	1300g	-9730K	1163.00
5 AF	930g	-9740K	874.40

#### 25° Offset



Metric				*Single hexagon
Size (mm)	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
6* x 7*	115	65g	-9742K	106.90
8 x 9	135	80g	-9743K	111.60
10 x 11	140	90g	-9744K	118.70
12 x 13	175	165g	-9745K	174.80
14 x 15	210	260g	-9746K	177.10
17 x 19	205	250g	-9747K	201.70
21 x 22	235	310g	-9748K	206.40

#### ΑF

Size (AF)	weight each	Order Code <b>KEN-582</b>	Price/1 RND
<sup>1</sup> / <sub>4</sub> "* x <sup>5</sup> / <sub>16</sub> " <sup>3</sup> / <sub>8</sub> " x <sup>7</sup> / <sub>16</sub> "	60g 90g	-9752K -9753K	128.20 142.40
1/2" X 9/16"	170g	-9754K	212.60
<sup>5/</sup> 8" X <sup>11/</sup> 16"	265g	-9755K	242.00
3/4" x 7/8"	300g	-9756K	263.80

### **Sets Contents:**

#### 7 Piece Metric:

6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 17 x 19 and 21 x 22mm.

#### 5 Piece AF:

1/4" X 5/16", 3/8" X 7/16", 1/2" X 9/16", 5/8" X 11/16" and 3/4" X 7/8".



		_	
Number of Pieces	Weight each	Order Code KEN-582	Price/1 RND
7 Metric	1280g	-9750K	1163.00
5 AF	930g	-9760K	1052.10



Made from chrome vanadium steel with a satin finish body and highly polished heads, with double ended closed jaw bi-hexagon offset. Conform to DIN 838 Metric & AF, BS 192: 1982 & BS 3555: 1998 Whitworth.



METHE				
Size	Overall	Weight	Order Code	Price/1
(mm)	Length	each	KEN-582	RNĎ
6 x 7	180	40g	-1570K	47.50
8 x 9	190	60g	-1590K	47.50
8 x 10	200	60g	-1600K	53.90
10 x 11	205	87g	-1610K	52.00
10 x 13	220	120g	-1620K	74.10
12 x 13	220	120g	-1640K	53.50
13 x 17	270	190g	-1660K	92.80
14 x 15	235	152g	-1670K	57.40
16 x 17	250	186g	-1680K	64.00
17 x 19	270	240g	-1690K	73.20
18 x 19	270	240g	-1700K	75.90
19 x 22	290	350g	-1710K	91.80
19 x 24	330	380g	-1720K	94.50
20 x 22	290	320g	-1730K	94.50
21 x 23	315	400g	-1740K	94.50
22 x 24	330	368g	-1750K	<b>158.60</b>
24 x 26	335	465g	-1760K	105.10
24 x 27	340	465g	-1770K	158.60
24 x 30	362	495g	-1780K	118.90
25 x 28	360	545g	-1790K	<b>117.40</b>
27 x 30	380	638g	-1800K	252.90
30 x 32	380	638g	-1810K	147.90
30 x 36	420	820g	-1820K	225.30
32 x 36	420	900g	-1830K	229.40
36 x 41	430	1100g	-1840K	421.00
41 x 46	440	1300g	-1850K	688.50
46 x 50	505	1570g	-1860K	694.50

HAND TOOLS

AF			
Size AF	Weight each	Order Code KEN-582	Price/1 RND
<sup>1</sup> / <sub>4</sub> " x <sup>5</sup> / <sub>16</sub> "	60g	-1260K	48.90
5/ <sub>16</sub> " x <sup>3/</sup> 8"	75g	-1270K	52.40
3/8" X <sup>7/</sup> 16"	94g	-1280K	55.80
<sup>7/</sup> 16" X <sup>1/</sup> 2"	124g	-1290K	69.30
½" x <sup>9</sup> /16"	152g	-1300K	77.80
9/ <sub>16</sub> " x <sup>5/</sup> 8"	157g	-1310K	81.90
5/8" X <sup>11/</sup> 16"	218g	-1320K	90.60
<sup>11/</sup> 16" X <sup>3/</sup> 4"	250g	-1340K	101.50
3/4" x 7/8"	320g	-1350K	<b>117.70</b>
<sup>13/</sup> 16" x <sup>7/</sup> 8"	335g	-1360K	167.20
<sup>15/</sup> 16" x 1"	465g	-1380K	198.70
<b>1</b> ½16" x <b>1</b> ½4"	618g	-1410K	223.50

#### Ring Crescent Wrenches

Chrome vanadium steel with satin chrome finish. Heads conform to DIN 838.



Size	Overall	Weight	Order Code	Price/1
(mm)	Length	each	KEN-582	RND
10 x 11	142	71g	-3766K	141.40
12 x 13	164	100g	-3768K	158.80
14 x 15	189	157g	-3770K	179.10
17 x 19	219	172g	-3772K	223.10

#### Whitworth

Size Whitworth	Weight each	Order Code KEN-582	Price/1 RND
3/ <sub>16</sub> " x 1/ <sub>4</sub> "	110g	-2010K	163.10
¹⁄4" x ⁵∕ <sub>16</sub> "	150g	-2020K	174.10
<sup>5/</sup> 16" X <sup>3/</sup> 8"	200g	-2030K	197.90
<sup>7/</sup> 16" X <sup>1/</sup> 2"	354g	-2050K	309.80
<sup>9/</sup> 16" X <sup>5/</sup> 8"	490g	-2070K	504.80
<sup>11/</sup> 16" X <sup>3/</sup> 4"	660g	-2100K	658.70

Sets 7 Piece Metric:  $6 \times 7$ ,  $8 \times 9$ ,  $10 \times 11$ ,  $12 \times 13$ ,  $14 \times 15$ ,  $16 \times 17$ and 18 x 19mm.

**11 Piece Metric:** 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27 and 30 x 32mm. **5 Piece AF:** ½" x 5½6", ¾8" x ½6", ½8" x ½6", 5%8" x ½1½6" and

**10 Piece AF:** \( \frac{1}{4}\) \( \times \frac{5}{16}\), \( \frac{5}{16}\) \( \times \frac{3}{8}\), \( \frac{3}{8}\), \( \frac{3}{8}\) \( \times \frac{7}{16}\), \( \frac{7}{16}\) \( \times \frac{1}{2}\), \( \frac{1}{2}\), \( \frac{1}{2}\) \( \times \frac{9}{16}\), \( \frac{5}{8}\), \( \frac{5}{16}\) \( \times \frac{3}{4}\), \( \frac{3}{4}\), \( \frac{7}{16}\), \( \times \frac{7}{16}\) \( \times \frac{15}{16}\) \( \times \frac{1}{2}\), \( \frac{1}{2}\), \( \frac{9}{16}\) \( \times \frac{15}{16}\), \( \times \frac{1}{2}\), \( \fr

11/16" x 3/4" BSW.



No. of Pieces	Weight each	Order Code <b>KEN-582</b>	Price/1 RND
7 Metric	1.20kg	-1960K	689.20
11 Metric	1.90kg	-1970K	1247.90
5 AF	0.92kg	-1920K	496.40
10 AF	2.00kg	-1930K	1071.30
5 BSW	2.75kg	-1950K	941.70

#### Ring Crescent Wrench Sets

4 Piece Metric: - 10 - 19mm

10 x 11mm,

12 x 13mm, 14 x 15mm, 17 x 19mm.



Range	Weight each	Order Code	Price/1
(mm)		<b>KEN-582</b>	RND
10 - 19	540g	-3776K	681.10


# KENNEDY Professional Flared PROFESSIONAL NUT Ring Spanners

Conform to: **ASME B107.4**. Made from chrome vanadium steel with a highly polished mirror finish. Made to American Federal Standards, giving higher torque therefore improved performance. The wrench will fit over the pipe to give a positive location on the nut. Can be used on hydraulic pipes, brake pipes etc.



#### Metric Conform with ANSI B107.9M.

Size (mm)	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
8 x 10	145	45g	-1020K	125.10
9 x 11	145	45g	-1030K	134.80
12 x 14	175	90g	-1040K	136.50
13 x 15	170	90g	-1050K	167.40
16 x 17	200	130g	-1060K	195.60





#### AF Conform with ANSI B107.6

Size (AF)	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
5/ <sub>16</sub> " x 3/ <sub>8</sub> "	145	45g	-1110K	56.20
3/8" x <sup>7/</sup> 16"	155	60g	-1120K	62.40
¹/2" x <sup>9/</sup> 16"	175	90g	-1130K	74.50
5/8" x <sup>11/</sup> 16"	198	130g	-1140K	94.30



Number of Pieces	Weight	Order Code	Price/1
	each	KEN-582	RND
5 Metric	420g	-1090K	301.50
4 AF	270g	-1170K	284.70

## KENNEDY Inc

## Industrial Flared Nut Ring Spanners

Conform to **ASME B107.4**. Made from high quality chrome vanadium steel. Satin finish body with highly polished heads. Offset ends. The wrench will fit over the pipe to give a positive location on the nut. Can be used on hydraulic pipes, brake pipes etc.



#### Metric Conform with ANSI B107.9M.

Size (mm)	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
6 x 8	135	38g	-3490K	93.10
8 x 10	135	38g	-3500K	108.80
9 x 11	155	54g	-3510K	115.40
10 x 11	155	54g	-3520K	116.50
10 x 12	155	54g	-3530K	117.90
12 x 14	175	95g	-3540K	118.70
13 x 14	175	95g	-3550K	123.10
14 x 17	200	130g	-3590K	155.60
17 x 19	200	130g	-3600K	162.70
19 x 22	225	220g	-3610K	179.90
22 x 24	230	270g	-3620K	206.20
24 x 27	250	340g	-3630K	547.10
30 x 32	275	450g	-3640K	706.00

#### AF Conform with ANSI B107.9.

Size (AF)	Weight each	Order Code <b>KEN-582</b>	Price/1 RND
<sup>1</sup> / <sub>4</sub> " x <sup>5</sup> / <sub>16</sub> "	38g	-3651K	33.40
3/8" x <sup>7/</sup> 16"	54g	-3652K	47.90
<sup>1</sup> / <sub>2</sub> " x <sup>9</sup> / <sub>16</sub> "	95g	-3653K	47.90
5/8" X <sup>11/</sup> 16"	130g	-3654K	56.40
3/4" v 7/0"	330g	-3655K	71 10


#### Set

#### **6 Piece Metric:**

6 x 8, 9 x 11, 10 x 12, 13 x 14, 14 x 17 and 19 x 22mm.

#### 5 Piece AF:

 $\frac{1}{4}$ " x  $\frac{5}{16}$ ",  $\frac{3}{8}$ " x  $\frac{7}{16}$ ",  $\frac{1}{2}$ " x  $\frac{9}{16}$ ",  $\frac{5}{8}$ " x  $\frac{11}{16}$ " and  $\frac{3}{4}$ " x  $\frac{7}{8}$ ".



Number of Pieces	Weight	Order Code	Price/1
	each	KEN-582	RND
6 Metric	710g	-3650K	292.30
5 AF	620g	-3659K	265.70

HAND TOOLS

#### 🛾 Industrial **Open Ended Spanners**



Chrome vanadium steel (except \* which are made from drop forged carbon steel) with a satin finish body and highly polished heads, with a 15° offset.

**DIN 3110:** 4 x 5mm to 32 x 36mm,  $^{1}4$ " x  $^{5}/_{16}$ " to  $^{15}/_{16}$ " x  $^{15}/_{8}$ " AF. **ASME B107.39:** 36 x 41mm to 46 x 50mm,  $^{1}/_{16}$ " x  $^{15}/_{8}$ " to  $^{113}/_{16}$ " x 2" AF. **DIN 3110 & BS192:1982:**  $^{1}/_{8}$ " x  $^{3}/_{16}$ " to 1" x  $^{11}/_{8}$ " Whitworth.



Metric				
Size	Overall	Weight	Order Code	Price/1
(mm)	Length	each	KEN-582	RNĎ
4 x 5	103	12g	-0530K	37.60
5 x 5.5	103	15g	-0540K	37.60
5.5 x 7	122	25g	-0550K	37.60
6 x 7	122	25g	-0570K	37.60
7 x 8	122	25g	-0580K	37.60
8 x 9	140	32g	-0590K	37.60
8 x 10	140	32g	-0600K	37.60
10 x 11	156	48g	-0610K	39.30
10 x 12	156	48g	-0612K	39.30
10 x 13	172	63g	-0620K	39.30
11 x 13	172	63g	-0630K	42.60
12 x 13	172	63g	-0640K	42.60
12 x 14	172	63g	-0644K	42.60
13 x 15	186	100g	-0650K	42.60
13 x 17	188	96g	-0660K	47.30
14 x 15	188	96g	-0670K	47.30
14 x 17	188	96g	-0677K	47.30
<u>16 x 17</u>	204	<u>120g</u>	-0680K	60.20
17 x 19	220	171g	-0690K	60.20
18 x 19	220	171g	-0700K	60.20
19 x 21	234	198g	-0709K	60.20
19 x 22	234	198g	-0710K	67.20
19 x 24	234	198g	-0720K	67.20
20 x 22	234	198g	-0730K	67.20
21 x 23	247	200g	-0740K	74.90
22 x 24	247 266	200g	-0750K	74.90
24 x 26	266	311g 311g	-0760K -0770K	90.60 91.80
24 x 27 24 x 30	285	311g	-0770K -0780K	91.80 91.80
24 x 30 25 x 28	285 285	405g 405g	-0780K -0790K	102.00
30 x 32	302	460g	-0790K -0810K	121.10
27 x 30	302	460g 460g	-0810K -0820K	121.10 121.10
27 x 30 27 x 32	302	460g 460g	-0820K -0830K	190.20
30 x 36	319	692g	-0840K	190.20
32 x 36	319	692g	-0850K	271.80
*36 x 41	434	1340g	-0860K	290.00
*41 x 46	465	1782g	-0870K	319.20
*46 x 50	495	2368g	-0870K -0880K	492.60
<del>_</del>	490	23008	-0000K	732.00

AF			
Size	Weight	Order Code	Price/1
AF	each	KEN-582	RND
1/4" X 5/16"	25g	-0260K	34.30
5/16" X 3/8"	32g	-0270K	35.40
3/8" X <sup>7/</sup> 16"	48g	-0280K	40.70
<sup>7</sup> / <sub>16</sub> " x <sup>1</sup> / <sub>2</sub> "	63g	-0290K	47.40
<sup>1/</sup> 2" x <sup>9/</sup> 16"	80g	-0300K	44.30
9/ <sub>16</sub> " x 5/ <sub>8</sub> "	96g	-0310K	44.80
5/8" x <sup>11/</sup> 16"	120g	-0320K	71.90
5/8" x 3/4"	170g	-0330K	85.50
11/ <sub>16</sub> " x 3/ <sub>4</sub> "	171g	-0340K	85.50
3/4" x 7/8"	198g	-0350K	83.90
<sup>13</sup> / <sub>16</sub> " x <sup>7</sup> / <sub>8</sub> "	220g	-0360K	90.60
7/8" x 15/16"	260g	-0370K	166.80
<sup>15</sup> / <sub>16</sub> " x 1"	311g	-0380K	119.70
1" x 1 <sup>1/</sup> 8"	405g	-0400K	115.80
1½16" x 1½4"	460g	-0410K	154.70
1½" x 15/16"	460g	-0420K	154.70
1 <sup>3</sup> / <sub>16</sub> " x 1 <sup>5</sup> / <sub>16</sub> "	460g	-0430K	159.20
1½" x 13/8"	692g	-0450K	268.60
15/16" x 11/2"	692g	-0460K	268.60
*1 <sup>7/</sup> 16" x 1 <sup>5/</sup> 8"	1340g	-0470K	306.20
*1½" x 15/8"	1340g	-0480K	334.40
*1 <sup>11</sup> / <sub>16</sub> " x 1 <sup>7</sup> / <sub>8</sub> "	1782g	-0490K	416.90
*1 <sup>13/</sup> 16" x 2"	2368g	-0510K	455.10

Whitworth			
Size	Weight	Order Code	Price/1
Whitworth	each	KEN-582	RNĎ
<sup>1/</sup> 8" x <sup>3/</sup> 16"	55g	-0010K	52.20
<sup>3/</sup> 16" X <sup>1/</sup> 4"	70g	-0020K	56.50
<sup>1</sup> / <sub>4</sub> " x <sup>5</sup> / <sub>16</sub> "	90ğ	-0030K	61.60
<sup>5</sup> / <sub>16</sub> " x <sup>3</sup> / <sub>8</sub> "	120g	-0040K	73.40
3/8" x <sup>7/</sup> 16"	225g	-0050K	91.00
<sup>7/</sup> 16" x <sup>1/</sup> 2"	230g	-0060K	107.90
<sup>1</sup> ⁄2" X <sup>9</sup> ∕16"	325g	-0070K	121.20
9/ <sub>16</sub> " x <sup>5/</sup> 8"	385g	-0090K	205.10
9/ <sub>16</sub> " x <sup>11/</sup> <sub>16</sub> "	435g	-0100K	161.40
5/8" X <sup>11/</sup> 16"	490g	-0110K	217.00
5/8" x 3/4"	495g	-0120K	217.00
<sup>11/</sup> 16" x <sup>3/</sup> 4"	495g	-0130K	382.20
3/4" x 7/8"	740g	-0140K	866.10

#### Sets:

**7 Piece Metric:** 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17 and 18 x 19mm.

**8 Piece Metric:** 24 x 26, 25 x 28, 27 x 30, 27 x 32, 32 x 36, \*36 x 41, \*41 x 46 and \*46 x 50mm.

**11 Piece Metric:** 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27 and 30 x 32mm.

**5 Piece AF:** 1/4" x 5/16", 3/8" x 7/16", 1/2" x 9/16", 5/8" x 11/16" and 3/4" x 7/8".

**10 Piece AF:**  $^{1/4}$ " x  $^{5/16}$ ",  $^{5/16}$ " x  $^{3/8}$ ",  $^{3/8}$ " x  $^{7/16}$ ",  $^{7/16}$ " x  $^{1/2}$ ",  $^{1/2}$ " x  $^{9/16}$ ",  $^{9/16}$ " x  $^{5/8}$ ",  $^{5/8}$ " x  $^{11/16}$ ",  $^{11/16}$ " x  $^{3/4}$ ",  $^{3/4}$ " x  $^{7/8}$ " and  $^{15/16}$ " x 1".

**8 Piece Whitworth:** ½" x ¾6", ¾6" x ¼", ¼4" x ¾6", ¾6" x ¾8", ¾8" x ¾16", ¼6" x ½2", ½2" x ¾16" and ¾16" x ¾8".



Number of Pieces	Weight each	Order Code <b>KEN-582</b>	Price/1 RND
7 Metric	0.64kg	-0960K	350.50
8 Metric	7.70kg	-0990K	1706.20
11 Metric	1.90kg	-0970K	753.60
5 AF	0.55kg	-0920K	269.40
10 AF	1.20kg	-0930K	612.40
8 Whit	1.50kg	-0950K	579.50

Chrome vanadium steel with a highly polished mirror finish preventing oil and dirt from adhering to the spanner. Made to American Federal Standards, extra thick heads offer higher torque forces to be applied therefore improved performance. Conform to ASME B107.39



Size (mm)	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
6 x 7	126	25g	-2990K	43.20
8 x 9	135	45g	-3000K	43.20
10 x 11	146	55g	-3010K	45.20
12 x 13	165	90g	-3020K	49.00
14 x 15	185	120g	-3030K	54.30
16 x 17	185	138g	-3040K	69.30
18 x 19	230	210g	-3050K	69.30
20 x 22	250	280g	-3051K	77.20
21 x 23	250	290g	-3052K	86.10
24 x 27	290	400g	-3053K	105.50
30 x 32	360	750g	-3054K	139.30

**7 Piece Metric:** 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17 and 18 x 19mm. 12 Piece Metric:

6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 20 x 22, 21 x 23, 24 x 27 & 30 x 32mm.



Number of Pieces	Weight	Order Code	Price/1
	each	KEN-582	RND
7 Metric	780g	-3900K	502.80
12 Metric	2730g	-3910K	926.50

#### Open Ended **Spanners**

Drop forged steel with 15° cranked open ends. Conform to ASME B107.39.



#### Industrial **Open Ended Spanners**

Made from chrome vanadium steel with polished head and 15° offset. Conform to ASME B107.39.



#### Metric

Size (mm)	Overall Length	Weight each	Order Code SEN-582	Price/1 RND
6 x 7	122	30g	-0570K	16.90
8 x 9	140	35g	-0590K	16.90
10 x 11	156	50g	-0610K	17.70
12 x 13	172	95g	-0640K	19.20
14 x 15	188	120g	-0670K	21.20
16 x 17	204	180g	-0680K	27.10
18 x 19	220	205g	-0700K	27 10

#### Metric

Set

**Metric 7 Piece** 

Size (mm)	Overall Length	Weight each	Order Code YMT-582	Price/1 RND	
6 x 7	122	25g	-0570K	25.20	
8 x 9	140	32g	-0590K	25.20	
10 x 11	156	48g	-0610K	26.40	
12 x 13	172	63g	-0640K	28.60	
14 x 15	188	96g	-0670K	31.70	
16 x 17	204	120g	-0680K	40.40	
18 x 19	220	171ğ	-0700K	40.40	

6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17 and 18 x 19mm.

METRIC OPEN-ENDED SPANNER SET · Conforms with ASME 8107.98-1994 Chrome Venedium Stee 15 Crowked Open Ends

MESCALINA

#### Set 7 Piece Metric:

of Pieces

7 Metric

1.25kg

6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17 and 18 x 19mm.



SEN-582

-0960K

173.00

Weight each

Price/1 RND 273.00

Number YMT-582 of Pieces -0960K 7 Metric 0.85kg

# **HAND TOOLS**

4 - 7.5mm x 0.5mm increments, screwdriver, file,

0.40mm gap gauge.



Number of Pieces	Contents	Weight each	Order Code KEN-582	Price/1 RND
11	As above	440g	-3780K	107.70

11 Piece Ignition

Wrench Kit

#### Miniature Open Ended Spanners



#### Metric. Conform to BS 192: 1982 & DIN 3110.

Size (mm)	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
3.2 x 4.0	70	6g	-1001K	40.20
0.4 x 5.0	70	6g	-1002K	40.20
0.5 x 5.5	80	11g	-1003K	40.70
5.5 x 6.0	80	11g	-1004K	40.70
0.6 x 7.0	80	10g	-1005K	40.70
0.7 x 8.0	90	15g	-1006K	41.40

#### **BA.** Conform to **BS 1842 : 1952**.

Size (BA)	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
0 x 2	89	25g	-0190K	45.80
1 x 3	67	20g	-0200K	45.80
4 x 6	63	10g	-0220K	45.80
5 x 7	63	5g	-0230K	45.80
8 x 10	64	5g	-0240K	45.80
9 x 11	51	5g 5g	-0250K	45.80

HAND TOOLS

**6 Piece BA:** 0 x 2, 1 x 3, 4 x 6, 5 x 7, 8 x 10, 9 x 11BA. **6 Piece Metric:** 3.2 x 4, 4 x 5, 5 x 5.5, 5.5 x 6, 6 x 7, 7 x 8mm




Number of Pieces	Weight	Order Code	Price/1
	each	<b>KEN-582</b>	RND
6 BA	90g	-0910K	206.00
6 Metric	90g	-1010K	217.90

#### Crowfoot Wrenches

Chrome vanadium wrenches designed to be used for getting into tight spots and hard to reach areas, in particular around tubing such as hydraulic lines etc. For use with 3/8" square drive tools.






( )	Size (mm)		Weight	Order Code	Price/1
(c)	(b)	(a)	each	KEN-582	RND
10	22	9	20g	-6280K	33.00
11	25	9	25g	-6281K	33.00
12	28	9	33g	-6282K	33.00
13	28	9	33g	-6283K	35.80
14	33	9	37g	-6284K	35.80
15	33	9	46g	-6285K	35.80
17	38	9	60g	-6287K	45.90
19	43	10	72g	-6289K	45.90
22	47	10	94g	-6292K	45.90
24	53	10	117g	-6294K	45.90

#### Set


**10 Piece Metric: 10, 11, 12, 13, 14, 15, 17, 19, 22 and 24mm.** Supplied on a sliding socket rail for storage.



## Flexi-ring End Sockets







Туре	Size	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
	13mm	70mm	124g	-1180K	273.30
	14mm	70mm	123g	-1181K	285.70
Metric	15mm	70mm	121g	-1182K	304.40
	16mm	70mm	119g	-1183K	323.00
1/2	17mm	77mm	158g	-1184K	347.80
	19mm	77mm	152g	-1185K	372.60
	22mm	82mm	193g	-1186K	397.50
	24mm	86mm	213ğ	-1187K	428.60

#### **8 Piece Metric Set Contents:**

13, 14, 15, 16, 17, 19, 22, and 24mm. Supplied with a sturdy hanging rail.



Number of Pieces	Contents	Weight each	Order Code KEN-582	Price/1 RND
8	As above	1.3kg	-1190K	2732.40

Designed to give greater flexibility and improved access when working in difficult conditions. Bi-hexagon (12 point). Manufactured from fully polished chrome vanadium steel. Conform with ANSI B107.5M.



Price/1 RND	Order Code KEN-582	Weight each	Overall Length	Size (mm)
77.70	-3670K	135g	175	8 x 9
96.90	-3680K	135g	185	10 x 11
109.50	-3690K	150g	196	12 x 13
125.70	-3700K	200g	220	14 x 15
149.10	-3710K	245g	240	16 x 17
138.40	-3720K	295g	265	18 x 19

#### 6 Piece Bi-hexagon: 8 x 9, 10 x 11, 12 x 13, 14 x 15 16 x 17 and 18 x 19mm. Weight each Price/1 RND Order Code Number **KEN-582** of Pieces 707.10 1.40kg -3725K

## T-Type Wrenches

For use in restricted areas. Ideally suited to changing spark plugs as the one piece design ensures that no socket or extion bar can become stuck on the plug or drop into the engine compartment. Single hex. Manufactured from chrome vanadium steel.









Diameter	Weight each	Order Code <b>KEN-582</b>	Price/1 RND
3/4 - 2"	120g	-9600K	188.70
1 <sup>1</sup> / <sub>4</sub> - 3"	250g	-9610K	254.60
2 - 43/4"	460g	-9620K	337.30

## Strap & Chain Wrenches

Used for gripping round any irregular shaped items, tubes and piping. Ideal for oil filters, hot radiator caps and hub caps. Both types suitable for 60 - 140mm diameters.

Strap Type: Hardened chrome vanadium handle with industrial strength, rubber strap that will not mark or scratch workpieces.

Chain Type: Hardened chrome vanadium handle with heavy duty chain for a positive grip.



Type	Weight	Order Code	Price/1
	each	KEN-582	RND
Strap	280g	-9500K	296.00
Chain	430g	-9520K	158.40

#### **Side Drive** Sockets

The Ken-Grip® socket offers a new standard of performance with the ability to grip fasteners which are up to 95% rounded off. A unique patented socket design grips new, worn and rusted fasteners without damaging them further. Double knurl feature gives a high grip which is essential for quick tool change when hands are greasy or oily. Manufactured from chrome vanadium steel, the sockets and accessories are aluminium free, fully chrome plated for a corrosion resistant, easy clean finish. The set features an extensive selection of socket sizes for use across a wide range of fasteners.







**Patented Design** 

Will grip new, worn and rusted fasteners without damaging them further



Will grip fasteners which are up to 95% rounded off

#### Will also fit a wide range of non-metric Hexagons, E-Torx® and Spline Drive Sizes.

#### Standard Length Sockets

Conform to DIN3124.





1/4" Square Drive

Overall Length	Weight each	Order Code KEN-582	Price/1 RND
25.0	10g	-4161K	70.00
25.0	10g	-4162K	72.30
25.0	10g	-4163K	72.30
25.0	10g	-4164K	72.30
25.0	10g	-4165K	72.30
25.0	20g	-4166K	72.30
25.0	20g	-4167K	72.30
25.0	20g	-4168K	74.80
25.0	20g	-4169K	74.80
25.0	30g	-4170K	74.90
25.0	30g	-4171K	78.30
25.0	30g	-4172K	78.30
25.0	40g	-4173K	78.30
	25.0 25.0 25.0 25.0 25.0 25.0 25.0 25.0	Length         each           25.0         10g           25.0         10g           25.0         10g           25.0         10g           25.0         10g           25.0         20g           25.0         20g           25.0         20g           25.0         20g           25.0         30g           25.0         30g	Length         each         KEN-582           25.0         10g         -4161K           25.0         10g         -4162K           25.0         10g         -4163K           25.0         10g         -4164K           25.0         20g         -4165K           25.0         20g         -4167K           25.0         20g         -4168K           25.0         20g         -4169K           25.0         30g         -4170K           25.0         30g         -4171K           25.0         30g         -4172K

#### Standard Length Sockets



HAND TOOLS

Conform to DIN3124.





1/2" Square Drive

Size	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
8.0mm	36.0	50g	-6871K	39.70
9.0mm	37.0	50g	-6872K	39.70
10.0mm	37.0	50g	-6873K	39.70
11.0mm	37.0	50g	-6874K	39.70
12.0mm	37.0	50g	-6875K	39.70
13.0mm	37.0	50g	-6876K	39.70
14.0mm	37.0	50g	-6877K	39.70
15.0mm	37.0	60g	-6878K	40.00
16.0mm	37.0	60g	-6879K	40.00
17.0mm	37.0	60g	-6880K	40.00
18.0mm	37.0	80g	-6881K	48.70
19.0mm	37.0	70g	-6882K	48.70
20.0mm	37.0	80g	-6883K	50.60
21.0mm	37.0	70g	-6884K	51.40
22.0mm	37.0	90g	-6885K	52.30
23.0mm	37.0	110g	-6886K	52.70
24.0mm	37.0	110g	-6887K	54.40
25.0mm	40.0	150g	-6888K	55.80
26.0mm	40.0	140g	-6889K	58.10
27.0mm	40.0	170g	-6890K	58.10
28.0mm	40.0	170g	-6891K	60.30
29.0mm	40.0	170g	-6892K	60.90
30.0mm	45.0	210g	-6893K	64.60
32.0mm	45.0	230g	-6895K	67.80
33.0mm	45.0	230g	-6898K	69.60
36.0mm	45.0	245g	-6899K	86.90

## Standard Length Sockets

Conform to DIN3124.





3/8" Square Drive

Size	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
6.0mm	26.0	30g	-5832K	37.60
7.0mm	26.0	30g	-5833K	37.60
8.0mm	26.0	30g	-5834K	37.60
9.0mm	26.0	30g	-5835K	37.60
10.0mm	26.0	30g	-5836K	37.60
_11.0mm	26.0	30g	-5837K	37.60
12.0mm	26.0	30g	-5838K	37.60
13.0mm	26.0	30g	-5839K	37.60
14.0mm	30.0	40g	-5840K	41.20
15.0mm	30.0	40g	-5841K	41.40
16.0mm	30.0	50g	-5842K	42.00
17.0mm	30.0	60g	-5843K	42.00
18.0mm	30.0	70g	-5844K	43.20
19.0mm	30.0	70g	-5845K	43.20
20.0mm	30.0	80g	-5846K	43.20
21.0mm	30.0	80g	-5847K	44.90
22.0mm	27.0	100g	-5848K	46.40

## **Deep Sockets**






3/8" Square	Drive				
Size	Overall Length	Weight each	Order Code KEN-582	Price/1 RND	
8.0mm	62.0	40g	-5849K	40.60	
9.0mm	62.0	40g	-5850K	40.60	
10.0mm	62.0	50g	-5851K	40.60	
11.0mm	62.0	50g	-5852K	40.60	
12.0mm	62.0	60g	-5853K	40.60	
_13.0mm	62.0	60g	-5854K	40.60	
14.0mm	62.0	70g	-5855K	45.00	
15.0mm	62.0	100g	-5856K	45.00	
_16.0mm	62.0	115g	-5857K	45.40	
17.0mm	62.0	130g	-5858K	45.40	
18.0mm	64.0	120g	-5859K	46.70	
_19.0mm	64.0	140g	-5860K	46.70	
21.0mm	64.0	155g	-5861K	48.50	
22.0mm	64.0	200g	-5862K	50.20	



**Side Drive** Socket Sets



## 1/4" Square Drive 19 Piece Metric Set



Accessories: ratchet handle, spinner handle, sliding T-handle, flexi-drive 145mm, universal joint, extension bar 100mm.

**PIECES** 

Number	Weight each	Order Code	Price/1
of Pieces		KEN-582	RND
19	880g	-8800K	740.70

## 3/8" Square Drive 50 Piece Metric Set

Ken-Grip® Standard & Deep Sockets **Standard:** 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21 and 22mm.

**Deep:** 10, 11, 12, 13, 14, 15, 17, 19 and 22mm.

Screwdriver Bits: Slotted 5, 5.5 and 6.5mm. **Crosspoint** No.1, 2, 3, 4.

**Sockets:** 3, 4, 5, 6, 8 and 10mm.

Accessories: ratchet handle, sliding T-handle, spinner handle, swivel handle, universal joint, 125 and 250mm extensions, 250mm wobble extensions, ½" and ½" male adaptors, ¼" socket bit coupler. Robust fitted case with security padlock hole and cushion grip handle.



**NEW** 







**50 PIECES** 

Number of Pieces	Weight each	Order Code KEN-582	Price/1 RND
50	3.00kg	-8810K	3655.80

## 1/2" Square Drive 30 Piece Metric Set

**Ken-Grip®:** 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22,23, 24, 25, 26, 27, 30 and 32mm.

Spark Plug Sockets: M10 and M14.

Accessories: quick release ratchet handle, sliding T-handle, universal joint, 75, 125 and 250mm extension bars. Robust fitted case with security padlock hole and cushion grip handle.





**30 PIECES** 

Number Weight of Pieces each 30 5.50kg

**KEN-582** -8820K

Price/1 RND 2646.20

#### **Push Through** Steel Handles

329.60

🕠 🔃 Lever Reversible Rubber Handle

with rubber grip, thumb lever for reversing without

Chrome - molybdenum with mirror polished finish. Push through square drive, needs only 3% movement

to operate ratchet.

140

TOOLS

HAND



Type	Overall	Weight	Order Code	Price/1
	Length	each	KEN-582	RND
Standard	125mm	120g	-4025K	376.60
Stubby	75mm	70g	-4028K	375.20

## Disc Type Steel Handle

Standard wrench with high polished finish. Fitted with spring loaded ball bearing socket retainer. Manufactured from chrome vanadium steel.



-4020K

#### Lever Reversible Rubber Handle

Chrome vanadium. Rubber grip, 72 tooth ratchet. With thumb lever for reversing without having to remove the socket or accessory. With quick release. A high quality wrench for the professional user.

170g



#### Lever Reversible Steel Handle

Fully chromed all steel handle with thumb lever for reversing without having to remove the socket or accessory.

		0	-	3
Overall Length	Number of Teeth	Weight each	Order Code KEN-582	Price/1 RND
143mm	72	120g	-4015K	380.70

#### Spinner Handles

Fixed Type: Chrome vanadium blade with spring loaded ball bearing socket retainer. Overall length: 150mm.



#### Extension Bars

1/4 Manufactured from high quality chrome vanadium with a fully polished finish. All with knurled 'finger grip'.

#### Standard



In areas where clearance may be a problem the 'wobble' square drive can be used at an angle of up to 15°.

Overall Length	Weight each	Order Code KEN-582	Price/1 RND
50mm	25g	-4060K	24.50
100mm	50g	-4080K	29.70
150mm	70g	-4100K	42.60
2E0mm	1150	44 20K	74 00

# Steel wire braid allows access into

bollucted areas.						
Overall Length	Weight each	Order Code KEN-582	Price/1 RND			
150mm	150g	-4140K	65.10			

Overall	weight	Order Code	Price/1
Length	each	KEN-582	RND
50mm	25g	-4070K	36.30
100mm	50g	-4090K	38.00
150mm	70g	-4110K	51.60
250mm	115g	-4130K	68.50
25011111	TTOE	-413UK	08.50

40 tooth chrome vanadium quick release ratchet

having to remove the socket or accessory.



ice/1 RND		Order Code <b>SEN-582</b>	Weight each	Number of Teeth	Overall Length
79.00	1	-4000K	120g	40	145

KENNEDY.	Ratche:	t
PROFESSIONAL	Repair	Kits
	-	



To suit	Weight	Order Code	Price/1
Ratchet Number	each	KEN-582	RND
KEN-582-4020K	30g	-4280K	210.60
KEN-582-4005K/4015K	30g	-4290K	96.50

#### Swivel Handle

The hinged link allows operation at varied angles to aid access in restricted areas. Knurled grip.



Overall	Weight	Order Code	Price/1
Length	each	KEN-582	RND
150mm	125g	-4180K	105.10

# Sliding

Manufactured from high quality chrome vanadium with a fully polished finish. The sliding bar will give many options for leverage within a given space.



Weight each	Order Code <b>KEN-582</b>	Price/1 RND
50g	-4040K	85.80
Wo	bble	

Overall	Weight	Order Code	Price/1
Length	each	KEN-582	RND
50mm	25g	-4070K	36.30
100mm	50g	-4090K	38.00

Length

105mm

## SOCKETS & ACCESSORIES - 1/4" SQUARE DRIVE


## Bi-Hexagon Sockets



Ideal for assembly and servicing of small precision mechanisms associated with electrical, electronic, ignition and refrigeration work. All bi-hexagon unless stated.



Double knurl feature gives a high grip which is essential for a quick tool change when your hands are greasy/oily. The 12 point bi-hexagon side drive design will give a higher torque than normal sockets. Manufactured from chrome vanadium, fully chrome plated with a mirror finish and aluminium-free to ensure non-sparking. Chamfered leading edge ensures easy fastener location.



Size		Weight		Price/1				
(mm)	Length	each	KEN-582	RND				
			/letric					
4.0	25mm	10g	-4300K	56.00				
4.5	25mm	10g	-4310K	57.80				
5.0	25mm	10g	-4320K	57.80				
5.5	25mm	10g	-4330K	57.80				
6.0	25mm	10g	-4340K	57.80				
7.0	25mm	20g	-4350K	57.80				
8.0	25mm	20g	-4360K	57.90				
9.0	25mm	20g	-4370K	59.90				
10.0	25mm	20g	-4380K	59.90				
11.0	25mm	30g	-4390K	59.90				
12.0	25mm	30g	-4400K	62.70				
13.0	25mm	30g	-4410K	62.70				
14.0	25mm	40g	-4420K	62.70				
		/letric (	(Single He					
4.0	25mm	10g	-4540K	21.30				
5.0	25mm	10g	-4542K	21.30				
5.5	25mm	10g	-4543K	21.30				
6.0	25mm	10g	-4544K	21.30				
7.0	25mm	20g	-4545K	21.30				
8.0	25mm	20g	-4546K	21.30				
9.0	25mm	20g	-4547K	21.30				
10.0	25mm	20g	-4548K	22.50				
11.0	25mm	30g	-4549K	22.50				
12.0	25mm	30g	-4550K	22.50				
13.0	25mm	30g	-4551K	22.50				
14.0	25mm	40g	-4552K	22.50				
		Metr	ic (Deep)					
4.0	50mm	10g	-4670K	21.80				
4.5	50mm	10g	-4671K	21.80				
5.0	50mm	10g	-4672K	21.80				
5.5	50mm	10g	-4673K	21.80				
6.0	50mm	10g	-4674K	21.80				
7.0	50mm	20g	-4675K	21.80				
8.0	50mm	20g	-4676K	21.80				
9.0	50mm	20g	-4677K	21.80				
10.0	50mm	20g	-4678K	21.80				
11.0	50mm	30g	-4679K	21.80				
12.0	50mm	30g	-4680K	25.60				
13.0	50mm	30g	-4681K	25.60				
14.0	50mm	40g	-4682K	29.00				
	Met		ngle Hex D	eep)				
6.0	50mm	10g	-4566K	21.80				
7.0	50mm	10g	-4567K	21.80				
8.0	50mm	10g	-4568K	21.80				
9.0	50mm	10g	-4569K	21.80				
10.0	50mm	10g	-4570K	21.80				
11.0	50mm	20g	-4571K	25.60				
12.0	50mm	20g	-4572K	25.60				
13.0	50mm	20g	-4573K	25.60				
14.0	50mm	40g	-4574K	28.20				
-								

-		
	150	-
-23		

Size			Order Code	Price/1
(mm)	Length	each	KEN-582	RND
			AF	
<sup>3/</sup> 16"	25mm	10g	-4450K	23.20
7/32"	25mm	10g	-4460K	23.20
1/4"	25mm	10g	-4470K	27.60
9/32"	25mm	20g	-4480K	27.60
<sup>5/</sup> 16"	25mm	20g	-4490K	27.60
11/32"	25mm	20g	-4500K	27.60
3/8"	25mm	30g	-4510K	27.60
<sup>7/</sup> 16"	25mm	30g	-4520K	27.60
1/2"	25mm	30g	-4530K	27.60
9/16"	25mm	30g	-4532K	31.70
			ingle Hex)	
3/16"	25mm	10g	-4430K	18.40
7/32"	25mm	10g	-4431K	18.40
1/4"	25mm	10g	-4432K	18.40
9/32"	25mm	20g	-4433K	18.40
<sup>5</sup> / <sub>16</sub> "	25mm	20g	-4434K	18.40
11/32"	25mm	20g 20g	-4435K	18.40
3/8"	25mm	30g	-4436K	18.40
7/ <sub>16</sub> "	25mm	30g	-4437K	18.40
1/2"	25mm	30g	-4438K	23.20
9/16"		30g	-4439K	23.20 23.20
	25mm			23.20
3/ "	Ε0		(Deep)	44.50
<sup>3/</sup> 16"	50mm	10g	-4580K	41.50
<sup>7/</sup> 32"	50mm	10g	-4581K	41.50
1/4"	50mm	10g	-4582K	42.50
9/32"	50mm	10g	-4583K	44.20
<sup>5/</sup> 16"	50mm	10g	-4584K	44.70
11/32"	50mm	20g	-4585K	48.00
3/8"	50mm	20g	-4586K	49.70
<sup>7/</sup> 16"	50mm	30g	-4588K	56.30
1/2"	50mm	50g	-4590K	59.30
<sup>9/</sup> 16"	<u>50mm</u>	40g	<u>-4592K</u>	66.40
	Al		le Hex Deep	
3/16"	50mm	10g	-4555K	20.10
<sup>7/</sup> 32"	50mm	10g	-4556K	20.10
1/4"	50mm	10g	-4557K	20.10
9/32"	50mm	10g	-4558K	20.10
<sup>5/</sup> 16"	50mm	10g	-4559K	18.40
11/32"	50mm	20g	-4560K	20.10
3/8"	50mm	20g	-4561K	20.70
<sup>7/</sup> 16"	50mm	30g	-4562K	22.80
1/2"	50mm	50g	-4563K	25.00
9/16"	50mm	40g	-4564K	28.20
*Sir	igle Hex		BA	
0	25mm	30g	-4600K	30.90
*1	25mm	30g	-4610K	30.90
2	25mm	20g	-4620K	30.90
3	25mm	20g	-4630K	30.90
4	25mm	20g	-4640K	30.90
*5	25mm	10g	-4650K	30.90
*6	25mm	10g	-4660K	30.90
	20111111	TOE	70001	30.30

#### **Universal Joint**



Hinged through 180° in both directions. Knurled for extra grip.

Drive male x female:  $\frac{1}{4}$ " x  $\frac{1}{4}$ ".



Overall	Weight each	Order Code	Price/1
Length		KEN-582	RND
40mm	30g	-4160K	48.20

#### Adaptors/Converters



1/4 Chrome vanadium.


#### **Hex Bit Adaptor**

Converts square drive tooling to use hexagon bits.



Square Drive x Hex	Overall Length	Weight each	Order Code <b>KEN-582</b>	Price/1 RND
1/4" X 1/4"	25mm		-4230K	40.90

#### Screwdriver Bits





Conform to **DIN**. Overall length: 37mm. Bit length: 19mm.



Туре	Size	Order Code	Price/1
	(mm)	KEN-582	RND
Slotted $\ominus$	4.0mm	-4700K	21.00
	5.5mm	-4710K	21.00
	7.0mm	-4730K	21.00
Cross Point	No.1 No.2 No.3 No.4	-4750K -4760K -4770K -4780K	32.70 32.70 32.70 32.70
	3.0mm	-4790K	32.70
	4.0mm	-4800K	32.70
	5.0mm	-4810K	32.70
Hexagon	6.0mm 8.0mm <sup>1/</sup> 8" <sup>5/</sup> 32"	-4820K -4830K -4840K -4850K	32.70 32.70 63.40 63.40
	3/ <sub>16</sub> " 7/ <sub>32</sub> " 1/ <sub>4</sub> "	-4860K -4870K -4880K -4890K	63.40 63.40 63.40 63.40
	5/ <sub>16</sub> "	-4890K	23.90
	T6	-4685K	23.90
	T7	-4686K	23.90
	T8	-4687K	23.90
Torx	T9	-4688K	23.90
	T10	-4689K	26.30
	T15	-4690K	29.00
① ·	T20 T25 T27	-4691K -4692K -4693K -4694K	30.50 31.70 33.90 35.70
	T40	-4695K	37.20

#### **Double Ended Lug**

For connecting two female square drives



Drive Female x Male	Overall Length	Weight each	Order Code <b>KEN-582</b>	Price/1 RND
1/4" x 1/4"	25mm		-4240K	20.40

#### **Drive Converter**

For using a combination of square drive sockets in one application.



Drive Female x Male		Order Code <b>KEN-582</b>	
1/4" X 3/8"	27mm	-4220K	34.30
3/8" X 1/4"	37mm	-5180K	34.30

## 

#### I Lever Reversible Rubber Handle



With thumb lever for reversing without having to remove the socket or accessory. Highly polished chrome vanadium with rubber grip.



Overall	Number of	Weight	Order Code	Price/1
Length	Teeth	each	SEN-582	RND
200mm	40	345g	-4940K	165.30

# Disc Type Steel Handle

Basic wrench with high polished finish. Fitted with spring loaded ball bearing socket retainer.



Overall	Number of	Weight	Order Code	Price/1
Length	Teeth	each	KEN-582	RND
200mm	42	380g	-4900K	183.40

#### Lever Reversible Rubber Handle

3/8 Chrome vanadium. Rubber grip, 72 tooth ratchet. With thumb lever for reversing without having to remove the socket or accessory. With quick release. A high quality wrench for the professional user.





Overall	Number of	Weight	Order Code	Price/1
Length	Teeth	each	KEN-582	RND
200mm	72	215g	-4942K	392.40

HAND TOOLS

#### Swivel Handles

The hinged link allows operation at varied angles to aid access in restricted areas.



			-5160K			
Grin	Overall	Weight	Order Code	Price/1		

Grip	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
Steel	225mm	310g	-5060K	144.60
Rubber	225mm	225g	-5160K	188.70

#### **Heavy Duty American Pattern**

-5060K



Grip	Overall Length	Weight each	Order Code <b>KEN-582</b>	Price/1 RND
American	225mm	310g	-5065K	146.50
		Comp	onents	
Replaceme	ent Knuckle		-5068K	72.10

# YAMOTO Quick Release

Ratchet Handle

With thumb lever for reversing without having to remove the socket or accessory. Highly polished chrome vanadium with rubber grip.

				adding.
Overall Length	Number of Teeth	Weight each	Order Code YMT-582	Price/1 RND
200mm	72	345g	-4942K	350.40

## Push Through Rubber Handle

A very economic wrench with a one way ratchet. Push through square drive allows left and right hand operation.



Overall	Number of	Weight	Order Code	Price/1
Length	Teeth	each	KEN-582	RND
200mm	41	205g	-4930K	542.20

## Clutch Type Drive Push Through Steel Handles

Chrome - molybdenum with mirror polished finish. Clutch type drive action Push through square drive, needs only 3% movement to operate ratchet.



Туре	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
Standard	180mm	220g	-4945K	369.20
Stubby	105mm	120g	-4948K	321.80

#### Lever Reversible Steel Handle

Fully chromed all steel handle with thumb lever for reversing without having to remove the socket or accessory.



Overall	Number of	Weight each	Order Code	Price/1
Length	Teeth		KEN-582	RND
200mm	72	205g	-4932K	359.40

## Ratchet Repair Kits



To suit Ratchet Number	Weight each	Order Code KEN-582	Price/1 RND
KEN-582-4900K	70g	-5220K	104.70
KEN-582-4932/4942K	70g	-5215K	94.70
KEN-582-4940K	70g	-5235K	173.50

#### YAMOTO Swivel INDUSTRIAL SOCKET SETS Handle

Chrome finish. American style handle.



9			
Overall Length	Weight each	Order Code YMT-582	Price/1 RND
225mm	310g	-5060K	142.10

## SOCKETS & ACCESSORIES - 3/8" SQUARE DRIVE





**Extensions** 3/8

Manufactured from high quality chrome vanadium with a fully polished finish. All with knurled 'finger grip'.



#### **Standard**

Overall Length	Weight each	Order Code KEN-582	Price/1 RND
75mm	80g	-4960K	31.70
125mm	130g	-4980K	43.60
150mm	150g	-5000K	52.30
250mm	280g	-5020K	73.60
300mm	340g	-5050K	128.50
450mm	430g	-5070K	189.70

#### Locking

A lever at the ratchet end of the extension pushes down a rod inside the bar which locks out the socket retaining ball, securing the socket to the bar. Ideal for use where there is a risk of leaving a socket in a recess.

Overall	Weight each	Order Code	Price/1
Length		KEN-582	RND
300mm	15g	-5150K	257.10

#### Wobble

In areas where clearance may be a problem the 'wobble' square drive can be used at an angle of up to 15°.

Overall Length	Weight each	Order Code KEN-582	Price/1 RND
75mm	65g	-5110K	42.40
150mm	120g	-5120K	66.00
250mm	260g	-5140K	94.90


# INDUSTRIAL SOCKET SETS Handle

# YAMOTO Composite Ratchet


With reverse lever, push button quick release. Offset handle to 3/8 help eliminate knuckle scrapes. 72-tooth gear drive for maximum power and chrome vanadium core for strength.



		•	
Exte	ns	310	ns
cxte			







## Spinner Handle Fixed Type



185g

Overall	Weight	Order Code	Price/1
Length	each	YMT-582	RND
150mm	240g	-5100K	60.40

#### Sliding 'T' Handle

3/8					
	0	W. Sali	•	D	
	Overall Length	Weight each	Order Code YMT-582	Price/1 RND	

-4920K

## 165mm **Universal Joint**

3/8 High polished chrome finish. Hinged through 180° in both directions.



67.50

Drive	Overall	Weight	Order Code	Price/1	
Male x Female	Length	each	YMT-582	RND	
3/8" x 3/8"	50mm	60g	-5040K	109.30	

## Spinner Handle Fixed Type

Chrome vanadium steel blade, polypropylene handle and spring 3/8 loaded bearing socket retainer.



#### Sliding 'T' Handle

Made from high quality chrome vanadium with a fully polished finish. The sliding bar gives many options for leverage within any space.



#### Speed Braces

Manufactured from high quality chrome vanadium, fully polished finish. Ideal for nut spinning.



Grip	Overall Length	Weight each	Order Code KEN-582	Price/1 RND
American	425mm	500g	-5090K	134.50
Pattern	470mm	410g	-5030K	144.80
Rubber Grip	400mm	470g	-5080K	134.40



Drive	Overall	Weight	Order Code	Price/1	
Male x Female	Length	each	KEN-582	RND	
3/8" x 3/8"	50mm	60g	-5040K	68.20	