

GROUP 501 ADJUSTABLE
WRENCHES



Page **338 - 340**

GROUP 503 AUTOMOTIVE



Page **341 - 366**

GROUP 505 COLD CHISELS
& PRY BARS



Page **367 - 369**

GROUP 510 SPIRIT/LASER
LEVELS



Page **370**

GROUP 512 PLASTERING/
BRICK TOOLS



Page **371 - 373**

GROUP 515 CRIMPING
TOOLS



Page **374 - 376**

GROUP 516 CABLE/WIRE
STRIPPING TOOLS



Page **378 - 379**

GROUP 516 SOLDERING
TOOLS



Page **380 - 382**

GROUP 516 MULTIMETERS



Page **383 - 386**

GROUP 518 ENGINEER'S
HAND TOOLS



Page **387 - 397**

GROUP 522 GARDENING &
CONTRACTOR'S TOOLS



Page **398 - 407**

GROUP 523 GARDEN
WATERING PRODUCTS



Page **408 - 413**

GROUP 525 HAMMERS &
AXES



Page **414 - 419**

GROUP 527 INSERTED FACE
HAMMERS



Page **420 - 422**

GROUP 530 HAMMER
SHAFTS



Page **423**

GROUP 531 FILE HANDLES




Page **423**

GROUP 533 SCISSORS &
DECORATING TOOLS



Page **424 - 433**

GROUP 534 INSULATED
SERVICE TOOLS



Page **434 - 437**

GROUP 536 TAPE MEASURES



Page **438 - 439**

GROUP 537 KNIVES



Page **440 - 445**

GROUP 538 SAW FRAMES



Page **446 - 447**

GROUP 539 CLAMPS



Page **448 - 451**

GROUP 540 FLUID
HANDLING &
LUBRICATION



Page **452 - 457**

GROUP 549 SHEET METAL
WORKING TOOLS



Page **418**

GROUP 553 MAGNETIC
TOOLING




Page **458 - 460**

GROUP 555 TORQUE
TOOLS



Page **461 - 463**

GROUP 556 NUT SPINNERS



Page **463**

GROUP 558 PLIERS &
GRIPS



Page **464 - 479**

GROUP 560 PUNCHES &
STAMPS




Page ... **480 - 481**

GROUP 561 STENCILS



Page **481**

GROUP 569 RIVETING
TOOLS




Page .. **482 - 483**

GROUP 572 SCREWDRIVERS



Page **484 - 494**

GROUP 573 SCREWDRIVER
BITS



Page .. **495 - 501**

GROUP 575 SAFETY
TOOLS



Page .. **502 - 505**

GROUP 580 WORKSHOP
SPANNERS &
SCAFFOLDING
TOOLS



Page .. **506 - 521**

GROUP 582 SPANNERS &
SOCKETS



Page .. **522 - 549**

GROUP 583 IMPACT
SOCKETS



Page .. **550 - 557**

GROUP 588 PIPE TOOLS



Page .. **558 - 564**

GROUP 589 VICE GRIPS



Page **565**

GROUP 591 SHEARS &
SNIPS



Page .. **566 - 567**

GROUP 592 BOLT & CABLE
CUTTERS



Page **568**

GROUP 593 DRAWER
CABINETS



Page **569**

GROUP 593 TOOL POUCHES
& TOOL ROLLS



Page .. **570 - 573**

GROUP 593 TOOL BAGS,
CASES & BOXES



Page .. **574 - 583**

GROUP 594 ROLLER
CABINETS &
TOOL CHESTS



Page .. **584 - 595**

GROUP 595 TOOL KITS &
TOOL CONTROL



Page .. **596 - 609**

GROUP 597 WOODWORKING
TOOLS



Page .. **610 - 617**

GROUP 601 HEXAGON
KEYS




Page .. **618 - 619**

GROUP 602 HEXAGON
BALL DRIVERS



Page .. **620 - 622**

GROUP 603 TX KEYS



Page **623**



HAND TOOLS

Product Groups
501 - 603

Product Grading



Production

High performance industrial tooling designed for continuous use applications on machine tools where repeatability and long tool life are of critical importance.



Professional

Industrial tooling that has enhanced features and benefits demanded by craftsmen and professional users.



Industrial

Designed for regular use in industrial applications. Manufactured to stringent quality levels and international standards.



Workshop

Standard quality tooling for use by tradesmen and generally industrial use.



Maintenance

Products designed for general maintenance of machines, workshops, garages and some household applications.



Home Improver

DIY quality tooling. Designed for home use and light industrial applications.

Contents

Description	Group	Page
Adjustable Wrenches	501	338 - 340
Automotive Tools	503	341 - 366
Basin Wrenches	588	563
Black Spanners	580	506 - 507
Bolt Cutters	592	568
Cable Ties	515	377
Chain Separators	588	583
Clamps	539	448 - 451
Cold Chisels & Pry Bars	505	367 - 369
Contractor's Tools	522	402 - 407
Crimping Tools	515	374 - 376
Cycle Tools	595	609
Drainage Equipment	588	564
Drawer Cabinets	593	569
Engineer's Hand Tools	518	387 - 397
File Handles	531	423
Fluid Handling	540	452 - 454
Garden Tools	522	398 - 401
Garden Watering Products	523	408 - 411
Garden Bags	523	412
Garden Gazebo & Fencing	523/984	413
Grease Nipples	541	458
Hammers & Axes	525	414 - 419
Hammer Shafts & Wedges	530	423
Hexagon Keys	601	618 - 619
Hexagon Ball Drivers	602	620 - 622
Impact Sockets	583	550 - 557
Insulated Service Tools	534	434 - 437
Knives	537	440 - 445
Lubrication Equipment	540	455 - 457
Magnetic Cable Guider	516	377
Magnetic Tooling	553/554	459 - 460
Mains Testers	515	377
Multimeters & Voltage Detectors	516	383 - 386
Nut Spinners	556	463
Painting & Decorating Tools	533	424 - 432
Pipe Tools	588	558 - 563
Plastering Tools & Trowels	512	371 - 373
Pliers & Grips	558	464 - 479
Precision Knives & Blades	537	444 - 445
Punches & Stamps	560	480 - 481
Riveting Tools	569	482 - 483
Roller Cabinets & Tool Chests	594	585 - 595
Roller Stands	588	565
Safety Tools	575	502 - 505
Saw Frames	538	446 - 447
Scaffolding Tools	580	507
Scissors	533	433
Screwdriver Bits	573	494 - 501
Screwdrivers	572	484 - 493
Shears & Snips	591	566 - 567
Socket Sets	582	538 - 539
- Mixed Drive		540 - 541
- 1/4" Square Drive		542 - 543
- 3/8" Square Drive		544 - 548
- 1/2" Square Drive		549
- 3/4" Square Drive		549
- 1" Square Drive		549
Sockets & Accessories		524 - 525
- 1/4" Square Drive		526 - 529
- 3/8" Square Drive		530 - 534
- 1/2" Square Drive		535
- 3/4" Square Drive		536
- 1" Square Drive		537
Socket Storage Rails & Clips	582	420 - 422
Soft Faced Hammers	527	380 - 382
Soldering Tools	516	508 - 521
Spanners	581/582	370
Spirit Levels	510	481
Stencils	561	521
Strap Wrenches	582	438 - 439
Tape Measures	536	432
Tiling Tools	533	576 - 580
Tool Cases	593	574 - 525
Bags		581 - 584
Boxes		570 - 572
Pouches		573
Rolls		596 - 597
Control		598 - 608
Tool Kits	595	461 - 463
Torque Tools	555	623
TX Keys	603	565
Vice Jaws	589	579
Wire Stripping Tools	516	610 - 617
Woodworking Tools	597	

**KENNEDY
PROFESSIONAL**

**Cushion Grip
Adjustable Wrenches**

Drop forged chrome vanadium steel with phosphate anti-corrosion finish. Hardened parallel opening jaws are ground and polished, laser etched with metric graduations for rapid repeatable reference setting. The wide grooved profile of the opening mechanism and coarsely knurled adjusting screw ensures smooth adjustment. Slim head profile allows easy access, the contoured jaws improve grip when used on damaged misshaped fasteners. The unique geomatic cushion grip improves user comfort, is resistant to oil and grease to provide a slip free grip. Securely bonded to the I-beam handle sub frame to prevent the ingress of oil and dirt.

Conforms to: **BS 6333-1995,**
DIN3117-1988.



**Tapered Jaw For Access Into
Tight Spaces.**



Kennedy Professional 150mm Wrench
Jaw capacity: 24mm




**UP TO 20% GREATER JAW
CAPACITY THAN CONVENTIONAL
ADJUSTABLE WRENCHES**



Conventional 150mm Wrench
Jaw capacity: 20mm

**GROOVED JAW FOR
POSITIVE GRIP EVEN ON
WORN SURFACES**



Length (mm)	Jaw Opening	Fastener Range	Weight each	Order Code KEN-501	Price/1 RND
150 (6")	23.9mm	M2-M14 (1/8" - 9/16")	140g	-3060K	175.70
200 (8")	28.6mm	M4-M18 (3/16" - 5/8")	260g	-3080K	201.50
250 (10")	32.8mm	M6-M20 (1/4" - 3/4")	400g	-3100K	228.20
300 (12")	38.1mm	M8-M24 (5/16" - 1")	650g	-3120K	269.20

Twin Pack

**2
PIECES**



Contents	Weight each	Order Code KEN-501	Price/1 RND
200 & 300mm	800g	-0640K	446.00


**KENNEDY
PROFESSIONAL**

**Extra Wide Jaw
Adjustable Wrench**

Drop forged chrome vanadium steel. Rubber comfort grip handle. Ideal for use in plumbing, installation and automotive applications. Ultra thin head designed for use in confined spaces. Graduated millimetre scale. More than 50% wider jaw compared to conventional adjustable wrenches.

Conforms to: **ISO 6787-1982, ASME
B.107.8M-1996, BS 6333-1995,
DIN3117-1988, JIS B4604-1976.**

**EXTENDED
RANGE**

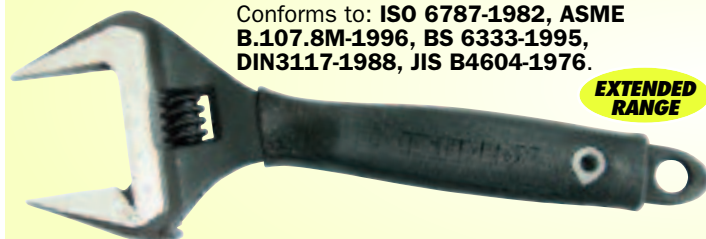

Length (mm)	Jaw Opening (mm)	Weight each	Order Code KEN-501	Price/1 RND
150 (6")	34.0	176g	-5060K	226.50
200 (8")	38.0	315g	-5080K	266.50
250 (10")	50.0	554g	-5100K	269.80
300 (12")	60.0	868g	-5120K	310.00

Combi Grip Adjustable Wrenches

These wrenches have a quick release reversible lower jaw with a serrated side with extra hard teeth for pipe gripping, a strong handle and a phosphated corrosion resistant finish. The smooth adjusting action makes them fast and easy to use. Conforms to: **ISO 6787-1982, ASME B.107.8M-1996, BS 6333-1995, DIN 3117-1988, JIS B4604-1976.**



Length (mm)	Jaw Opening (mm)	Weight each	Order Code KEN-501	Price/1 RND
250 (10")	30.0	345g	-4100K	453.30
300 (12")	35.0	890g	-4120K	574.70

KENNEDY Adjustable Wrenches

Manufactured from high strength 'I' beam section chrome or phosphate vanadium steel for improved strength and rigidity, the jaws are heat treated for extended tool life. High polished corrosion-resistant finish. 15° offset head angle for positive torque control. Slimline tapered jaws for improved access into confined spaces. Parallel jaws with smooth jaw adjustment and self-locking design prevents the jaws opening unintentionally even when under full load. Suitable for industrial engineering, automotive, agricultural, maintenance and assembly applications.

Conforms to: BS 6333-1995, DIN3117-1988.



Tapered Jaw For Access Into Tight Spaces



Phosphate Finish

Phosphate Finish

Length (mm)	Jaw Opening (mm)	Torque (kg/cm)	Weight each	Order Code KEN-501	Price/1 RND
100 (4")	17 (21/32")	714	60g	-0040K	132.70
150 (6")	24 (1")	1670	140g	-0060K	140.60
200 (8")	28 (1 1/32")	3100	260g	-0080K	161.20
250 (10")	33 (1 5/16")	5190	400g	-0100K	182.50
300 (12")	38 (1 3/8")	8820	650g	-0120K	215.40
375 (15")	50 (2")	17295	1040g	-0150K	298.00
450 (18")	60 (2 3/8")	23060	1670g	-0180K	421.00
600 (24")	70 (2 3/4")	25000	3300g	-0240K	1307.90

Phosphate Finish Sets


2
PIECES

3
PIECES




Number of Pieces	Contents	Weight each	Order Code KEN-501	Price/1 RND
3	100, 200 & 300mm	1100g	-0600K	578.60
2	150 & 250mm	540g	-0620K	361.50

UP TO 20%
GREATER JAW
CAPACITY THAN
CONVENTIONAL
ADJUSTABLE
WRENCHES

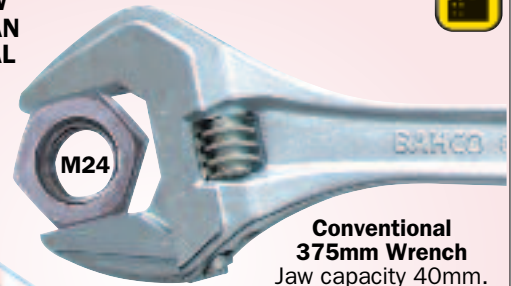

Conventional 375mm Wrench
Jaw capacity 40mm.

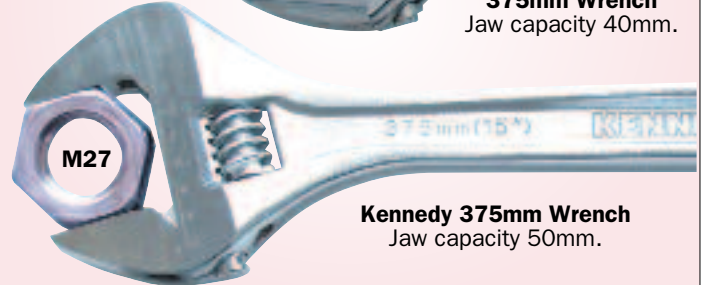

Kennedy 375mm Wrench
Jaw capacity 50mm.

Chrome Finish

Length (mm)	Jaw Opening (mm)	Torque (kg/cm)	Weight each	Order Code KEN-501	Price/1 RND
100 (4")	17 (21/32")	714	60g	-1040K	173.20
150 (6")	24 (1")	1670	140g	-1060K	161.60
200 (8")	28 (1 1/32")	3100	260g	-1080K	185.40
250 (10")	33 (1 5/16")	5190	400g	-1100K	209.90
300 (12")	38 (1 3/8")	8820	650g	-1120K	247.70
375 (15")	50 (2")	17295	1040g	-1150K	342.70
450 (18")	60 (2 3/8")	23060	1670g	-1180K	484.20

Chrome Finish Set

3
PIECES



Number of Pieces	Contents	Weight each	Order Code KEN-501	Price/1 RND
3	100, 200 & 300mm	1100g	-1600K	655.80

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

YAMOTO *Satin Finish Adjustable Wrenches*



Slimline tapered parallel jaws for improved access into confined spaces with smooth jaw adjustment and self-locking design prevents the jaws opening unintentionally even when under full load. Graduated laser etched jaws for fast repeatable jaw setting and adjustment. Manufactured from '1' beam section chrome vanadium steel for improved strength and rigidity, the jaws are heat treated for extended tool life. Corrosion-resistant satin finish. 22.5° offset head angle for positive torque control. Suitable for marine engineering, automotive, aerospace, agricultural maintenance and assembly applications. Conforms to: **BS 6333-1995, DIN3117-1988.**



Torque Ratings
Conform to **ISO 6787:1982.**

Length (mm)	Jaw Opening (mm)	Torque kg/cm	Weight each	Order Code YMT-501	Price/1 RND
150 (6")	20 (3/4")	1670	140g	-2060K	126.50
200 (8")	25 (1")	3100	260g	-2080K	145.10
250 (10")	30 (1 3/16")	5190	400g	-2100K	164.30
300 (12")	35 (1 3/8")	8820	650g	-2120K	193.90
375 (15")	44 (1 3/4")	17295	950g	-2150K	268.20



Sets Number of Pieces	Contents	Weight each	Order Code YMT-501	Price/1 RND
2	150 & 250mm	650g	-2400K	392.10
2	200 & 300mm	1020g	-2500K	472.30

SENATOR *Chrome Finish Adjustable Wrenches*

Manufactured from '1' beam section chrome vanadium steel for improved strength and rigidity, the jaws are heat treated for extended tool life. High polished corrosion-resistant chrome finish. 22.5° offset head angle for positive torque control. Slimline tapered jaws for improved access into confined spaces. Parallel jaws with smooth jaw adjustment and self-locking design prevents the jaws opening unintentionally even when under full load. Suitable for industrial engineering, automotive, aerospace, maintenance and assembly applications.



Torque Ratings
Conform to: **ISO 6787:1982.**

Length (mm)	Torque kg/cm	Weight each	Order Code SEN-501	Price/1 RND
100 (4")	690	60g	-1040K	88.30
150 (6")	1670	140g	-1060K	97.00
200 (8")	3100	260g	-1080K	111.30
250 (10")	5190	400g	-1100K	126.00
300 (12")	8820	650g	-1120K	148.60
380 (15")	17295	1300g	-1150K	205.60
457 (18")	23060	1990g	-1180K	290.50

Chromed Drop Forged Adjustable Wrenches

Tapered jaws for improved access into confined spaces. Smooth jaw adjustment. Graduated laser etched jaw for fast jaw setting. Manufactured from chromed drop forged steel.




Size	Jaw Opening	Weight each	Order Code SEN-501	Price/1 RND
150mm (6")	20mm	140g	-4060K	43.40
200mm (8")	24mm	280g	-4080K	64.10
250mm (10")	30mm	435g	-4100K	92.80
300mm (12")	34mm	720g	-4120K	112.20

Chromed Drop Forged General-Purpose Wrench

Made from fully chrome plated drop forged steel. Jaw opening capacity 68mm. 90° sliding jaw.

Overall length: 230mm.

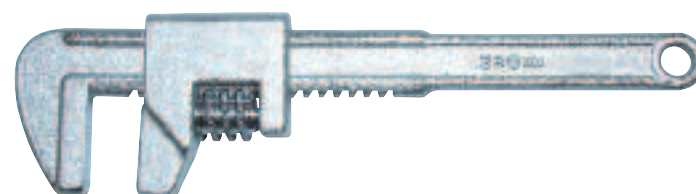

Length (mm)	Jaw Opening (mm)	Weight each	Order Code SEN-501	Price/1 RND
230 (9")	68	500g	-5100K	189.40

KENNEDY *Service Kits*

Consisting of replacement jaw, knurl and pin.





Finish	Wrench Size (mm)	Weight each	Order Code KEN-567	Price/1 RND
Phosphate	150 (6")	25g	-0060K	49.60
	200 (8")	55g	-0080K	50.30
	250 (10")	90g	-0100K	64.00
	300 (12")	130g	-0120K	78.20
	375 (15")	250g	-0150K	59.10
	450 (18")	365g	-0180K	157.10
Chrome	600 (24")	420g	-0240K	542.90
	150 (6")	25g	-1060K	3.00
	200 (8")	55g	-1080K	53.20
	250 (10")	90g	-1100K	61.50
	300 (12")	130g	-1120K	59.90
	375 (15")	250g	-1150K	93.40
	450 (18")	365g	-1180K	147.70
	600 (24")	420g	-1240K	501.30



Circuit Continuity Tester

For testing circuit continuity on non-live systems. Locates broken circuits in fuses, switches, sockets and wires. 1m lead. Super sharp tempered steel probe to test through wire insulation.




			
Requires AA battery (not supplied).			
Model Number	Weight each	Order Code	Price/1 RND
CCT001	90g	KEN-503 -1000K	761.50

Standard Circuit Tester

Suitable for use with power on. For 6 and 12V automotive systems only. Locates shorts, earth and open circuits. 1m lead. Super sharp tempered steel probe to test through wire insulation.

Probe length: 45mm.

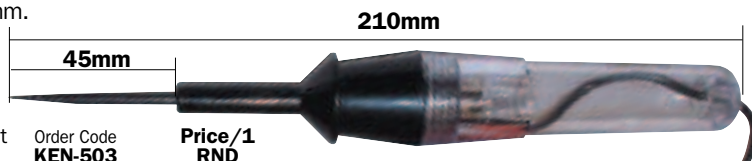

Model Number	Weight each	Order Code KEN-503	Price/1 RND
SCT012	80g	-1020K	121.20

For use on 6 and 12V

Commercial Duty Circuit Tester

Suitable for use with power on. For 6, 12 and 24V automotive systems only. Locates shorts, earths and open circuits. 1.4m heavy duty lead with spring strain relief. Super sharp stainless steel probe to test through wire insulation.

Probe length: 100mm.



230mm

100mm

Model Number	Weight each	Order Code	Price/1 RND
CDT024	215g	KEN-503 -1060K	152.00

For use on 6, 12 and 24V

Long Probe Circuit Tester

Suitable for use with power on. For 6 and 12V automotive systems only. Locates shorts, earth and open circuits. 1.7m heavy duty lead with spring strain relief. Super sharp tempered steel probe to test through wire insulation.

Extra long probe length: 180mm.

50mm		130mm	300mm		
		For use on 6 and 12V			
Model Number	Weight each	Order Code KEN-503	Price/1 RND		
XCT012	245g	-1040K	202.70		

Battery Fluid Tester

Tests 6, 12 and 24V batteries. Tough glass tube construction with colour coded float for easy reading which indicates the state of charge in each cell. Displays the specific gravity with a scale range of 1.100 to 1.300.



Product Number	Scale Range	Order Code KEN-503	Price/1 RND
BFT624	1.1-1.3	-1120K	72.00

Battery & Alternator Tester

Indicates condition of battery and the output of an alternator. For automotive use on 12V DC systems only. Magnetic back.



0.8m long cable leads.

Test	Cable Voltage	Order Code KEN-503	Price/1 RND
	12V	-1080K	169.00

Standard Automotive Fuse Set

An assortment of standard automotive bladed fuses supplied in transparent storage box. Colour coded transparent fuse bodies. Rated to 32V.

Fuse material: zinc.

Contents:

Plug-in fuse type: 3A, 5A, 7.5A, 15A, 20A, 30A (15 of each).

Plug-in fuse type: 10A (30pcs).

**120
PIECES**



Number of Pieces	Order Code KEN-503	Price/1 RND
120	-9900K	159.10

High Amp Maxi Fuse Set

An assortment of Maxi (High Amp) automotive bladed fuses supplied in a transparent storage case. Colour coded transparent fuse bodies.

Fuse voltage rating: 32V.

Fuse material: Zinc.

Contents:

Fuse types: 20A, 30A, 40A, 50A, 60A, 70A, 80A, 100A (6 of each).

**48
PIECES**



Number of Pieces	Order Code KEN-503	Price/1 RND
48	-9920K	569.50

Quick Splice Set

For fast, simple and strong splicing of automotive electrical wires. Easy-to-use, no wire strippers or crimper required.

Maximum electrical rating: 600V.

Maximum temperature: 105°C.

Terminal material:

brass.

Plating: tin

insulation.


Material: PP.

Contents:

Red: 0.5mm² x 1.0mm² (25pcs).

Blue: 1.5mm² x 2.5mm² (25pcs).

**50
PIECES**

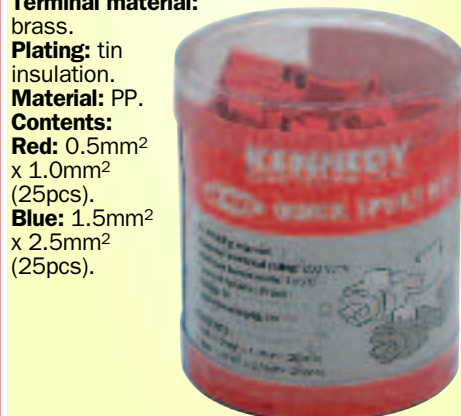

Number of Pieces	Order Code KEN-503	Price/1 RND
50	-9930K	110.20

KENNEDY 7-Piece Panel Beating Set

Supplied in a high quality fitted blow moulded impact resistant case. Drop forged, high carbon steel hammers with ground heads and cheeks. Hickory, octagonal section shafts. 1x: curved, utility, heel and toe dolly. 1x: 12oz shrinking hammer and flat faced bumping hammer, 1x 10oz round finishing pick.



**7
PIECES**



Number of Pieces	Weight each	Order Code KEN-503	Price/1 RND
7	7.40kg	-7650K	2519.90

Dent Puller Set

For repairing dents in body panels. Supplied complete with self tapping pull screw for use where access to the rear of the panel is blocked by reinforcements or other parts, a range of steel hooks and pull curls for pulling the edges of panels and a chain and hook. The long hammer shaft allows the pulling/striking force to be precisely controlled.

Contents: (1x) hammer (10lbs cast iron), 22.5Ø x 500 and 22.5Ø x 200mm pipes, 2 hole pipes, 6 x 170, 6 x 120, 6 x 200 and 3mm x 100mm plates, chain and hook, hex nut and blow moulded storage case.



**9
PIECES**

Model Number	Weight each	Order Code KEN-503	Price/1 RND
DP9	9.00kg	-3460K	1188.60


Panel Beating Dollies

Manufactured from drop forged medium carbon steel (SAE/AISI 1055). Heat-treated with a polished mirror finish.



Grid Dolly

For shrinking work. With a large crowned grid face on the surface and a plain flat face on the base this dolly, combined with a shrinking hammer and the use of heat, provides quick and effective shrinking.



Length (mm)	Order Code KEN-503	Price/1 RND
120	-7500K	526.40

Double-End Hand Dolly

For reshaping crowned panels and general panel beating.



Length (mm)	Order Code KEN-503	Price/1 RND
758	-7520K	413.60

Utility Dolly


Double-sided multi-purpose. Use the edge most suited to the size and shape of a damaged flange.



Length (mm)	Order Code KEN-503	Price/1 RND
64	-7540K	374.50

Toe Dolly (Low Crown Dolly)


For reshaping. Can be used in the hand to deliver a series of blows to the underside of the panel. Long crown enables use in hard to reach areas.



Length (mm)	Order Code KEN-503	Price/1 RND
120	-7560K	374.50

Curved Dolly


For raising low spots on panels. The edge can also be used to restore the shape of a roof and reform beads.



Length (mm)	Order Code KEN-503	Price/1 RND
132	-7580K	413.60

Heel Dolly

For general reshaping of contoured panels, raising low spots and general panel beating.



Length (mm)	Order Code KEN-503	Price/1 RND
81	-7600K	337.50

Spot Weld Remover

Suitable for cutting holes in steel metal, steel, plastic and brass. The hardened steel cutter is reversible increasing tool life. Adjusting the spring loaded centre point screw accurately controls the depth of cut allowing the top to be removed whilst leaving the lower panel in place.



Capacity (mm)	Shank (mm)	Maximum Rated Operating Speed	Weight each	Order Code KEN-503	Price/1 RND
10	6.5	900rpm	30g	-1200K	156.10

3 Piece Panel Seam Splitter Set

Ideal for separating spot-welded panels during repairs. Stainless steel coated chrome vanadium with through tang shafts allow use with hammers. Dual material soft grip handles for comfort and control. Includes 90°, curved and straight seam splitters. Cushioned handle absorbs any shock from hammer blows. Made from super tough alloy steel.



**3
PIECES**

Number of Pieces	Weight each	Order Code KEN-503	Price/1 RND
3	94g	-7710K	1041.50

Trim Pin Remover

Designed for removing vehicle trim panels and upholstery. Also used for replacing door locks, window mechanisms and general bodywork repairs.



Overall Length	Weight each	Order Code KEN-503	Price/1 RND
230mm	155g	-1500K	149.80

KENNEDY Lever Operated Vacuums

For use in hand lift applications only. Multiple vacuums used on a single load can only improve handling. If using more than one vacuum tool the ratio of maximum lift capacity does not increase. To lift heavier weights a larger vacuum must be used. All are fitted with a rubber suction cap which will not damage contact surface during the lifting action. For use on glass and plastic or any smooth surface material and can also be used for pulling out dents.

Single (VLS045)
Double (VLD070)
Triple (VLT070)



Model Number	Cups	Max Lift	Order Code KEN-503	Price/1 RND
VLS045	1x10cm	45kg	-2620K	271.00
VLD070	2x12cm	70kg	-2640K	100.80
VLT070	3x12cm	110kg	-2660K	905.80

Filler Applicators

100mm wide plastic spreader, suitable for the application of auto body filler.




PACK OF
5

Pack Quantity	Size	Order Code KEN-503	Price/1 RND
5	100mm (4")	-2820K	56.50

Auto Body Filler Applicator Set

4 Piece Set
Spring steel blades with composite grips. Suitable for the application of auto body filler.

Blade widths:
12, 25, 50 and 75mm.
Size (W x H x D):
123 x 210 x 5mm.




**4
PIECES**

Description	Order Code KEN-503	Price/Pk RND
Auto Body Filler Applicators	-2825K	68.30

Universal Door Handle Clip Remover


Removes door panel clips without breakage. Simple action - insert the tool and push the clip out.



Size (mm) (W x H x D)	Weight each	Order Code KEN-503	Price/1 RND
84 x 254 x 30	45g	-2790K	50.20

Folding Windscreen Stand

Lightweight tubular steel design with chain stops, foam protection and rubber feet. Large rubber suckers prevent screen from moving during preparation.

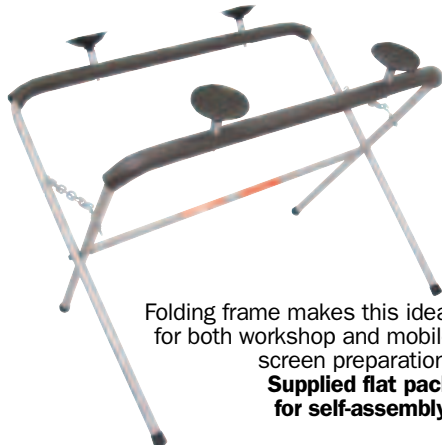

Folding frame makes this ideal for both workshop and mobile screen preparation.
Supplied flat pack for self-assembly.

Type	Weight each	Order Code KEN-503	Price/1 RND
Windscreen Stand	7.6kg	-2890K	2472.40

Windscreen Moulding Release Tool

Removes trim moulding around cemented windscreen and rear windows quickly and easily.



Type	Weight each	Order Code KEN-503	Price/1 RND
Windscreen Release Tool	90g	-2810K	44.90

Wax Injector Gun

WIG100
Pneumatic tool for spraying and injecting wax underseal into areas that are difficult to access, such as door cavities, inside box section chassis and around wheel arches. Has a 1ltr container with a 1/4" NPT connection, operates from 90 - 145psi (6 - 10bar) air pressure with an air consumption rate of 380ltr/min and a vacuum of (maximum) 550mm HG. Supplied with 900mm spray hose and hanging hook.



**1
LTR**

Size	Order Code KEN-503	Price/1 RND
1ltr	-1880K	446.20

Universal Trim Pad Remover

For removing plastic interior trim retaining studs. Corrosion-resistant.



Size (mm) (W x H x D)	Weight each	Order Code KEN-503	Price/1 RND
84 x 259 x 30	135g	-2800K	94.70

Glass Run Channel Cleaner

Automotive glass run channel cleaners are for the fast removal of glass, chips and debris from run channels on side windows. Suitable for unhooking locking weather strips around windcreens, with a long shaft for reaching deep into door recess. Manufactured from hardened and tempered chrome vanadium steel with a comfort grip.



-8730K



-8720K

-8710K

Overall Length	Weight each	Order Code KEN-503	Price/1 RND
260mm	150g	-8710K	67.90
330mm	190g	-8720K	79.30
610mm	190g	-8730K	142.10

Automotive Curved Hook Tools

Curved hook tools are for inserting and removing rubber seals and gaskets, they feature a long shaft and curved head for smooth operation in both directions. Manufactured from hardened and tempered chrome vanadium steel with a comfort grip.



Overall Length	Weight each	Order Code KEN-503	Price/1 RND
230mm	120g	-8760K	102.10
295mm	150g	-8770K	113.60

Windscreen Wiper Arm Removal Tool

Windscreen wiper arm removal tool for removing stuck and stubborn taper fitting wiper arms.

Maximum opening: 27mm.
Collar size: 15mm.



Description	Order Code KEN-503	Price/1 RND
Windscreen Wiper Arm Removal Tool	-1570K	170.50

KENNEDY Hydraulic Body Repair Kits

Porta Power with Ram & Spreader

Used for clamping, pulling, bending, straightening, spreading and lifting operations. Snaps together. Heavy-duty hand pump has automatic overload feature. Tough, blow moulded case. Strong flexible hose with spring guards at both ends. 10,000PSI hydraulic hand pump, 1/2 Tonne ram and spreader.



Kit Size	Stroke Length	Order Code KEN-503	Price/1 RND
4 Tonne	100mm	-7240K	3145.40
10 Tonne	150mm	-7260K	3106.00

Body Repair Kit Spares

Description	Size	4 Tonne		Size	10 Tonne	
		Order Code KEN-567	Price/1 RND		Order Code KEN-567	Price/1 RND
Spreader Ram	-	-8240K	466.50	-	-8240K	466.50
Spreader Ram Repair Kit	-	-8250K	16.50	-	-8250K	16.50
Small Extension Tube	100mm	-8280K	55.20	125mm	-8420K	156.50
Medium Extension Tube	200mm	-8290K	69.60	250mm	-8430K	162.70
Long Extension Tube	305mm	-8300K	104.30	355mm	-8440K	199.30
Extra Long Extension Tube	410mm	-8310K	127.30	480mm	-8450K	237.20
Double Ended Male Snap Connector	-	-8320K	34.40	-	-8460K	80.20
Flat Base	114x63mm	-8330K	68.70	150x95mm	-8470K	159.50
90° V' Base	-	-8340K	40.50	-	-8480K	79.10
Wedge Head	-	-8350K	34.60	-	-8490K	67.40
Spread Plunger Toe	-	-8360K	48.10	-	-8500K	113.80
Spreader Ram Toe	-	-8370K	45.40	-	-8510K	122.40
Rubber Head	67mm ø	-8380K	62.30	75mm ø	-8520K	87.60
Serrated Saddle	35mm ø	-8390K	32.80	46mm ø	-8530K	46.20
Seal Repair Kit	-	-8000K	18.10	-	-8020K	28.60
Replacement Blow Mould Case	-	-8400K	268.50	-	-8540K	506.40

Single Speed Hydraulic Hand Pumps

Rugged construction with an internal overload valve, a pressure rating of 10,000psi (700bar) and a 1/4 NPT thread size. Operates in a vertical and horizontal position.



Model Number	Pressure Rating PSI (Bar)	Usable Oil Capacity	Oil Volume Per Stroke	Oil Port Thread	Length (mm)
HPS035	10,000 (700)	350cc	3.2cc	1/4 NPT	292
HPS060	10,000 (700)	600cc	3.2cc	1/4 NPT	478

Model Number	Weight each	Order Code KEN-503	Price/1 RND
HPS035	5.70kg	-8800K	1791.60
HPS060	7.10kg	-8820K	1025.50

Spares

Description	Order Code KEN-567	Price/1 RND
Connection Hose (1500mm x 1/4" NPT)	-8120K	323.00
Repair kit for HPS035	-8050K	31.30
Repair kit for HPS060	-8060K	31.00

Hydraulic Push Rams

Rugged construction with a heavy-duty return spring. Chrome plated piston inhibits rusting. 1/4 NPT thread size. Accessories easily snap on.



Model Number	Capacity (Tonne)	Stroke (mm)	Oil Cap (cc)	Cylinder Bore dia.	Length Ret. Ext.	Outside dia. Piston Ram	Oil Port Thread
HRP004	4	100	65	28.5mm	230 330	22 38	1/4 NPT
HRP010	10	150	243	45.0mm	325 475	33 57	1/4 NPT

Model Number	Weight each	Order Code KEN-503	Price/1 RND
HRP004	1.80kg	-7170K	454.40
HRP010	5.30kg	-7190K	740.80

Twin Speed Hydraulic Hand Pumps

Rugged construction. Internal overload valve prevents it from being used beyond rated capacity. Operates in a vertical and horizontal position. Pressure rating 10,000psi (700bar). 3/8 NPT thread size. Pump handle locks into place to be used as a carrying handle.

Model Number	Pressure Rating PSI (Bar)		Usable Oil Capacity	Oil Volume Per Stroke		Oil Port Thread	Length (mm)
	Stage 1	Stage 2		Stage 1	Stage 2		
HPT035	200 (13.8)	10,000 (700)	350cc	7.0cc	1.0cc	3/8 NPT	310
HPT070	200 (13.8)	10,000 (700)	600cc	13.0cc	2.8cc	3/8 NPT	528
HPT250	200 (13.8)	10,000 (700)	2500cc	13.0cc	2.8cc	3/8 NPT	632

Model Number	Weight each	Order Code KEN-503	Price/1 RND
HPT035	5.30kg	-8900K	2154.50
HPT070	8.00kg	-8940K	2403.40
HPT250	12.0kg	-8960K	3191.30

Spares

Description	Order Code KEN-567	Price/1 RND
Connection Hose (1500mm x 3/8" x 1/4" NPT)	-8140K	225.10
Repair kit for HPT035	-8080K	47.60
Repair kit for HPT070	-8090K	56.60
Repair kit for HPT250	-8100K	66.50

Hydraulic Pull Back Ram

Rugged construction with a heavy-duty return spring. Chrome plated piston inhibits rusting. 1/4 NPT thread size. Accessories easily snap on. For use with Porta Power/Body Dozer power units.



Model Number	Capacity (Tonne)	A Stroke (cm)	Cylinder Bore Diameter (mm)	B Overall Length (mm)	Oil Port Thread
HRP005	5	15	34	740	1/4 NPT

Model Number	Weight each	Order Code KEN-503	Price/1 RND
HRP005	6.70kg	-7180K	3467.80

Service Kit for Kennedy Hydraulic Pull Ram To suit the Kennedy Hydraulic Pull Ram (KEN-503-7180K) illustrated.

To Suit	Order Code KEN-567	Price/1 RND
KEN-503-7180K	-8010K	57.10



Hydraulic Bench Presses

Ideal for pressing, bending and extruding. The Hydraulic pump can be manually operated or by compressed air connecting the airline supplied to an air supply line or direct to a compressor providing at least 8 - 9.5bar at 4cfm. Hydraulic gauge is included. Ideal for industrial and automotive applications.

20 Tonnes



Sturdy steel frame with end braces and wide feet for extra stability. Work bed height is adjustable in 8 increments of 120mm, allowing large work pieces to be worked on with maximum flexibility.

Capacity: 20 tonnes.

30 Tonnes

Heavy duty steel frame with end braces and wide feet for maximum stability. Work bed height is fully adjustable in 7 increments of 140mm, giving increased flexibility when working with large work pieces.

Capacity: 30 tonnes.

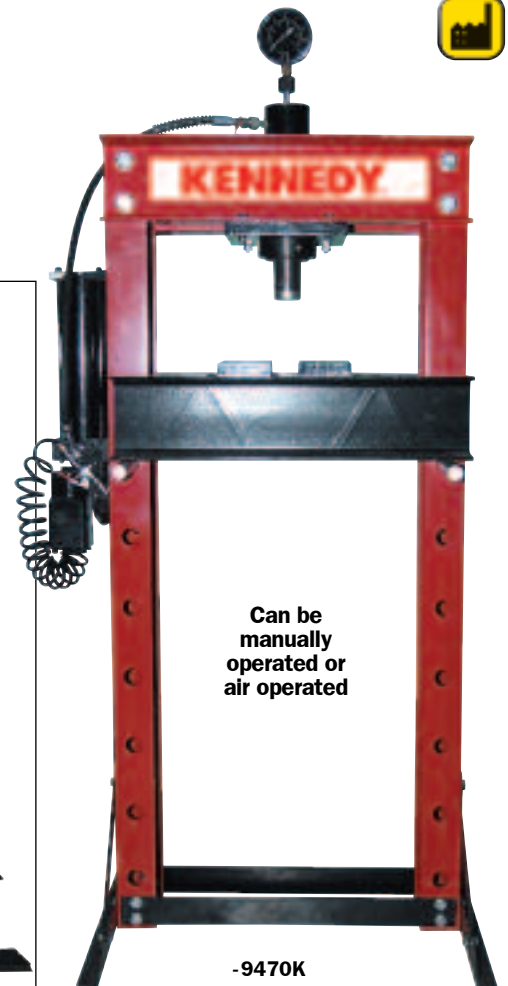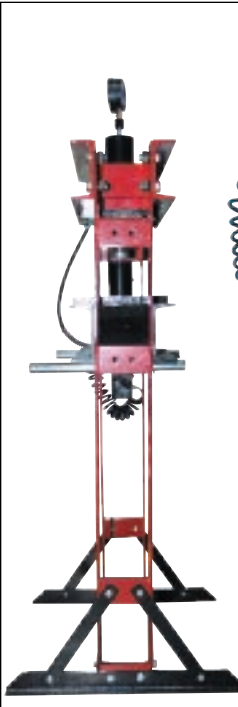

Can be manually operated or air operated

-9470K

Capacity	Work Bed Adjustable Height	Order Code	Price/1 RND
20 Tonne	8 Increments of 120mm	-9460K	11865.30
30 Tonne	7 Increments of 140mm	-9470K	18567.00

Seal Repair Kits

Description	Order Code	Price/1 RND
For 20T Ram	-8550K	55.60
For 20T Pump	-8560K	55.60
For 30T Ram	-8570K	55.60
For 30T Pump	-8580K	55.60

Hydraulic Bench Press


Ideal for pressing, bending and extruding. Built for tough daily use in industrial and automotive workshops, manufactured welded steel frame with two end braces for stability and a fully adjustable work bed providing flexibility and convenience. Fitted with a detachable pump and ram allowing hydraulics to be used for other purposes when the press is not being used. Hydraulic gauge is included.

Capacity: 10 tonnes.

These hydraulic presses are ideal for assembly, straightening, fabrication, quality control, maintenance, product testing, bending, forming, punching and shearing.


Model number	HBPO10.
Capacity	10 Tonne.
Ram stroke	150mm.
Extension screw	60mm.
Max height of ram to table	300mm.
Min height of ram to table	90mm.
Table aperture	140mm.
Working table width	360mm.
Overall height	895mm.
Hydraulic gauge included	Yes.
Weight	47kg.

1 tonne (metric ton or t)
= 1000kg
1 ton (imperial ton)
= 2240lbs (1016kg)


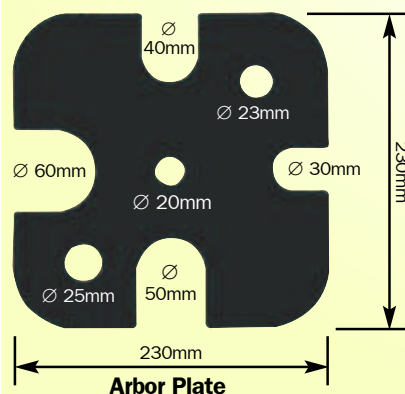


Arbor Plate


Ram Adaptor

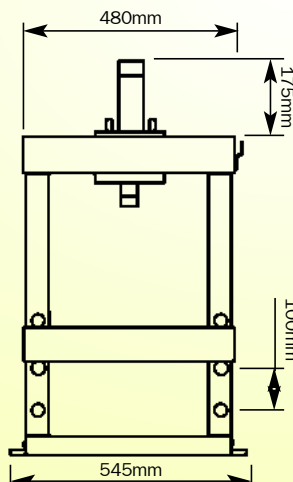

Ram Adaptor

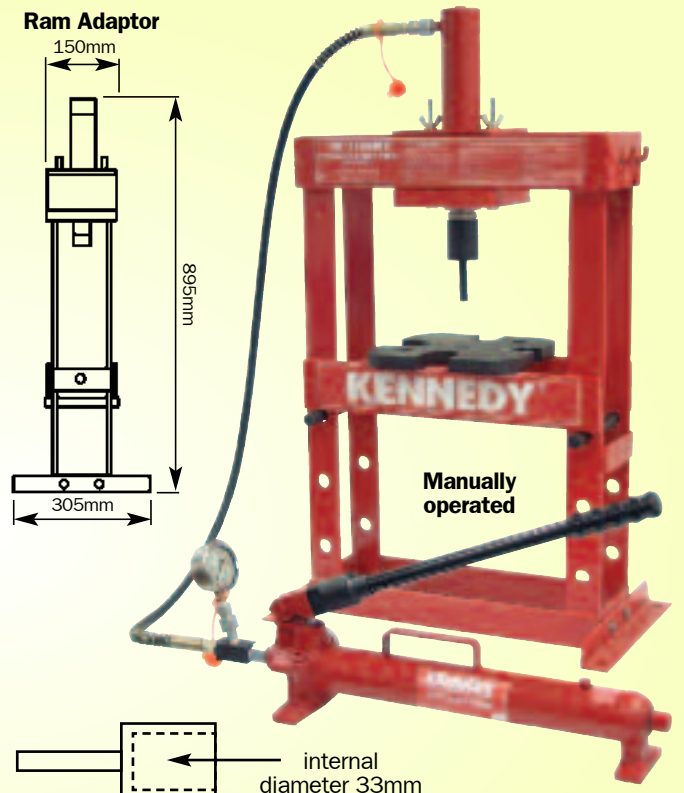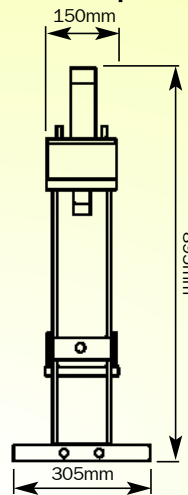

Manually operated



Spare pump available - (KEN503-8820K), see page RND.

Model Number	Capacity	Overall Height (mm)	Weight each	Order Code	Price/1 RND
HBPO10	10 Tonne	895	47kg	-5000K	3748.70
Accessories		Description	Weight each	Order Code	Price/1 RND
		Seal Repair Kit	10g	-8220K	111.80

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

KENNEDY
QUALITY IN EVERY TOOL

Brake Pedal Depressor

Ingenious tool for depressing and holding down the brake pedal whilst carrying out maintenance.

NEW




Description	Order Code KEN-503	Price/1 RND
Brake Pedal Depressor	-1910K	464.10

Hose Pinch Clamp Set

HPS003

These professional tools are for clamping flexible hoses from 11mm to 60mm in diameter. Made from a composite of glass reinforced nylon, they are lightweight, tough and have smooth rounded jaws to prevent damage to internal reinforcement.

**3
PIECES**

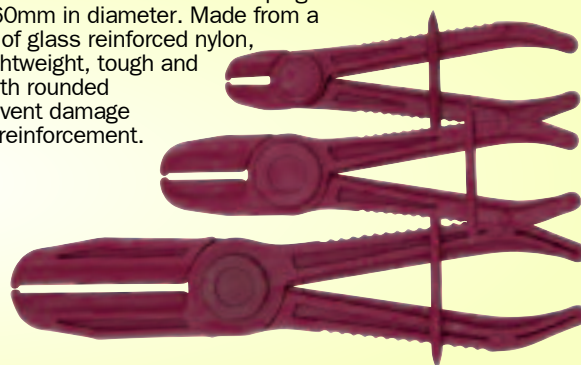

Hose Range	Weight each	Order Code KEN-503	Price/1 RND
11-60mm	330g	-1940K	377.00

Brake Pin Punches

Parallel pin punches for the removal of brake caliper pad retaining pins. 6.0mm diameter punch uses a pilot tip to aid location in hollow pins used on GM/Vauxhall calipers.

Overall length: 165mm.




Diameter (mm)	Weight each	Order Code KEN-503	Price/1 RND
5.5	95g	-4910K	110.50

Brake Spring Cup Washer Tool

Removes and replaces T-slot anti-rattle spring washers found in drum brake assemblies. Hardened and tempered carbon steel shank and cup with oxidised finish for protection against corrosion, bevelled and notched cup fits 16 - 22mm ($\frac{5}{8}$ " - $\frac{7}{8}$ ") diameter.

Impact resistant square section handle for secure grip even when greasy.

Overall length: 152mm (6").



Product Number	Weight each	Order Code KEN-503	Price/1 RND
BST122	110g	-4940K	46.10

Brake Clip Tool

Designed for import cars with brake shoe hold down clips. Removes and installs brake clip and nail on brake shoes in seconds. Impact resistant square section handle for secure grip even when greasy.

Overall length: 200mm (8").



Product Number	Weight each	Order Code KEN-503	Price/1 RND
BSC150	165g	-4960K	182.00

Brake Fluid Tester (Battery Operated)

This ingenious tool is invaluable in the garage workshop for testing the quality of brake fluid. Testing for moisture content in the fluid by resistance to electric current. You get instant results from the built-in LED indicator light system.

(Runs on 1x 1.5V AAA battery).



Description	Order Code KEN-503	Price/1 RND
Brake Fluid Tester	-1130K	268.80

Extra Heavy Duty Ear Type Clip Pliers

These pliers have steel jaws, PVC coated handles and a $\frac{1}{2}$ " sq for use with torque wrenches and bar breakers. Suitable for all ear type CVJ boot clips.




NEW

Product Number	Order Code KEN-503	Price/1 RND
AT4185	-4820K	275.20

Brake Caliper Spreader

Retracting brake caliper pistons can be used with $\frac{1}{2}$ " square drive ratchet and 21mm hex wrench or spanner and is suitable for use on most cars and motorcycles. Constructed from hardened steel with phosphate finished spreader plates for corrosion protection.

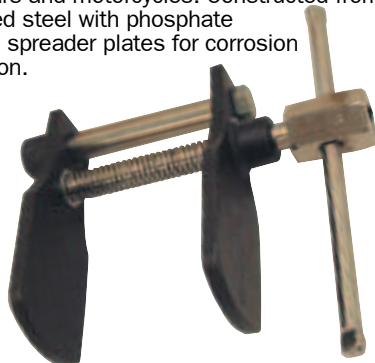

Product Number	Weight each	Order Code KEN-503	Price/1 RND
BCS065	830g	-1900K	439.20

Brake Pad Key


8mm hexagon key. 140mm handle for optimum leverage and grip. Suitable for disc brake caliper retaining bolts on many modern cars. Manufactured from chrome vanadium steel with corrosion resistant phosphated finish.



Size	Weight each	Order Code KEN-503	Price/1 RND
8mm Hex	245g	-2880K	104.10

Spring Type Hose Pinch Tool

For clamping flexible brake lines, fuel lines, vacuum hose and other fluid lines up to 12mm diameter. Allows servicing to be carried out without the need for system draining. Sliding lock collar allows hoses to be fully or partly closed. Smooth rounded jaw edges avoid damage to hoses. All steel construction with corrosion-resistant chrome finish.

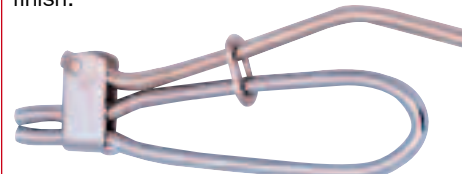

Maximum Diameter	Weight each	Order Code KEN-503	Price/1 RND
12mm	160g	-2840K	129.10

Ratcheting Hose Pinch Pliers

For clamping flexible brake lines, fuel lines, vacuum hose and other fluid lines. Heavy duty serrated jaw edges provide excellent clamping whilst avoiding damage to hoses. Jaws pivot and self-level to ensure parallel clamping. Fine-adjusting ratchet action allows hoses to be fully or partly closed. All steel construction with corrosion-resistant finish.



Overall Length	Weight each	Order Code KEN-503	Price/1 RND
200mm	295g	-2850K	278.70
250mm	435g	-2860K	292.40
300mm	565g	-2870K	358.80



KENNEDY
QUALITY INDUSTRIAL EQUIPMENT

Pneumatic Brake & Clutch Bleeder

PBB100


Has a 1ltr container with a 1/4" NPT connection, operates from 90 - 145psi (6 - 10bar) air pressure with an air consumption rate of 180ltr/min, an extraction rate of 1.6ltr/min and vacuum (max) of 550mm HG. Handles non-flammable liquids between 0 and 80°C.



Product Number	Capacity (litre)	Weight each	Order Code KEN-503	Price/1 RND
PBB100	1.0	470g	-1920K	585.50

Remote Hose Clamp Pliers

For the removal and replacement of fuel, oil and water hoses. Flexible 530mm long reach ratchet mechanism allows the pliers to release and lock hose clamps in the opened position. Supplied with cable clamping nipple for use when replacing the cable.

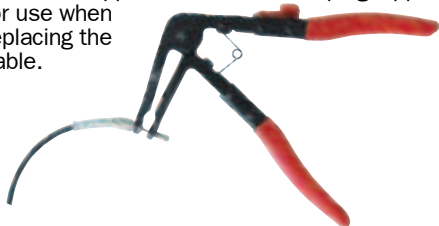

Capacity	Weight each	Order Code KEN-503	Price/1 RND
55mm	575g	-1970K	603.80

Angled Flat Band Hose Clamp Pliers

Removes and installs flat band hose clamps. Swivel tips to grip at any angle. Locking handle allows user to maintain 'open' position and hold clamp in place.



Overall Length	Weight each	Order Code KEN-503	Price/1 RND
215mm	200g	-1960K	170.60

Heavy Duty Hose Clip Pliers - Clic Compatible

With steel jaws and PVC coated handles. These spring loaded dual purpose pliers are designed for fitting and removing Clic and Clic-R® hose clips.



Overall Length	Weight each	Order Code KEN-503	Price/1 RND
260mm	230g	-4810K	238.30

Vacuum Testing & Brake Bleeding Kit

Vacuum testing kit that helps to locate and identify faults on cars, motorcycles and commercial vehicles. Supplied in robust blow moulded case.

Contents: serviceable metal bodied vacuum pump, reservoir jar, transfer lid, storage lid, 4x lengths of 6mm ID tubing, 1x length of 4mm ID tubing adaptor. Set of brake bleeding adaptors, rubber cup adaptor.

Maximum vacuum: 550mm Hg.

Reservoir capacity: 150ml.



Description	Order Code KEN-503	Price/1 RND
Vacuum Testing & Brake Bleeding Kit	-2720K	1597.70

Pressure Tester

Cooling System & Radiator Cap Pressure Tester

Designed for the pressure testing of cooling systems and radiator caps up to 35psi (2.5bar). Suitable for use on most makes of car and commercial vehicles, including: Mercedes, Ford, Chrysler, Peugeot, Honda, Lexus, Mazda, Suzuki, Toyota, Nissan, Opel, Volkswagen, Saab, Volvo, Audi, Citroen, Fiat and BMW.


Contents: 14 radiator pressure testing caps, for use in testing cooling systems for leaks. Two cap adaptors, sizes 2 - 3 and 4 - 5, for testing radiator cap release pressure and seal condition. Two 200psi coolant hoses (5/16" and 3/8"), for use with T-adaptor for in-line pressure testing. T-adaptor for creating in-line pressure testing set-up. Two 3/4" hose clips.

Description	Order Code KEN-503	Price/1 RND
Cooling System & Radiator Pressure Tester	-0960K	3353.40




Universal Caliper Wind-Back Tool Kits

Winds back disc brake calipers when replacing brake pads. Professional quality, allows the easy return of brake piston into the caliper. Suitable for most braking systems.



Number of Pieces	Order Code KEN-503	Price/1 RND
12	-2770K	671.90
18	-1890K	883.00

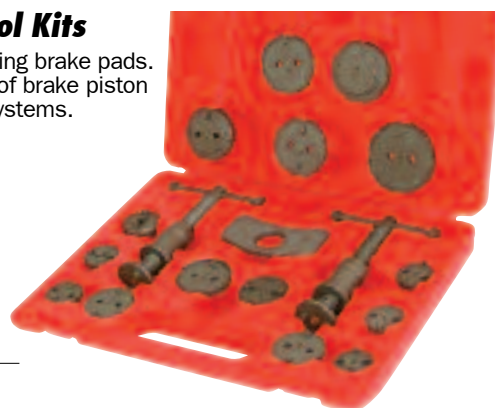

Compression Tester

Suitable for all types of spark plugs. Finds faults in piston rings, valves, head gaskets and cylinder bores. Suitable for use on most petrol engine vehicles and motorcycles. Can be used on crankshaft seals in two-stroke engines. 195mm flexible hose. For use on 14mm and 18mm threads. Large easy to read scale 0 - 21bar/ 0 - 300psi. Air release valve to allow rapid re-testing.



BEST SELLER

Description	Weight each	Order Code KEN-503	Price/1 RND
Petrol engine Compression Tester	440g	-1160K	459.70

Vacuum & Fuel Pump Tester

Suitable for use on most engines. Large, easy to read dual calibrated colour coded scale. Suitable for all types of spark plugs. Can be used on crankshaft seals in two-stroke engines. Suitable for testing and finding fault in petrol engines with spark misfires, poor engine compression, weak/rich mixture, ignition over advanced/retarded, inlet manifold and carburettor air leaks, incorrect valve timing and poor fuel economy. Can be used for carburettor balancing, checking turbo boost pressure up to 0.7bar and fuel pump.



Description	Weight each	Order Code KEN-503	Price/1 RND
Vacuum Tester	440g	-1140K	308.90

KENNEDY
QUALITY INSURANCE TOOLING

Valve Spring Compressor

Fully adjustable valve spring compressor for use on large and diesel engines. A unique 'direct action' compressor lever gives improved visibility and ease of use in areas of difficult access. Manufactured from heavy duty steel with all rivetted joints and a slip resistant rubber handle.

Restricted access adaptors: 25, 30mm.

Jaw opening: min. 35mm, max. 200mm.

Throat clearance: 250mm.




**35 - 200mm
Capacity**

Capacity Min./Max.	Weight each	Order Code KEN-503	Price/1 RND
35 - 200mm	2.50kg	-2700K	791.90

Valve & Piston Ring Compressors

Designed for use on production lines as well as in the automotive workshop. Able to cope with occasional commercial use. Manufactured from bright nickel plated steel with PVC cushion grips.

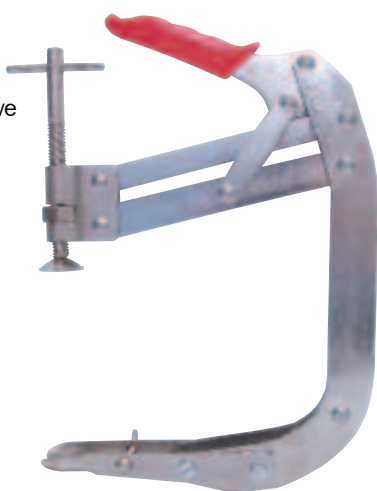

Opening Capacity	Weight each	Order Code KEN-503	Price/1 RND
75 - 230mm	1.30kg	-2010K	489.50

Piston Ring Compressors

The compressor gently compresses the piston rings into position reducing the risk of damage to components during installation. Key operated with ratchet mechanism and safety valve for combining safe rapid compression with positive control. Made from tempered spring steel complete with steel key.

PRC-540 - Passenger car vehicle engines.

Capacity: 57 - 125mm (2¼" - 5").

Height: 80mm (3¼").

PRC-730 - Car/light commercial vehicle engines.


Capacity: 90 - 175mm (3½" - 7").

Height: 100mm (4").

PRC-765 - Heavy commercial vehicle engines.

Capacity: 90 - 175mm (3½" - 7").

Height: 165mm (6½").

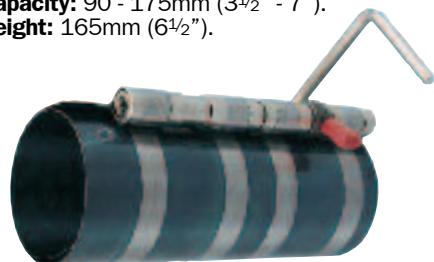

Model Number	Weight each	Order Code KEN-503	Price/1 RND
PRC540	260g	-2210K	153.60
PRC730	300g	-2240K	168.00
PRC765	560g	-2270K	292.80

Valve Spring Compressor

Fully adjustable valve spring compressor for use on multi-valve petrol and diesel engines with deep seated valves.

Universal model with unique dual-cam action, parallel lift and automatic locking reversible jaw/ adaptor, suitable for general use on a wide range of OHC, OHV and CVH engines. A unique 'direct action' compressor lever gives improved visibility and ease of use in areas of difficult access. Manufactured from heavy-duty steel with all rivetted joints and a slip resistant rubber handles.

Restricted access adaptors:


25, 30mm.

Jaw opening: min. 55mm, max. 175mm.

Throat clearance: 165mm.

Packaging dimensions (W x H x D):

430 x 205 x 40mm.

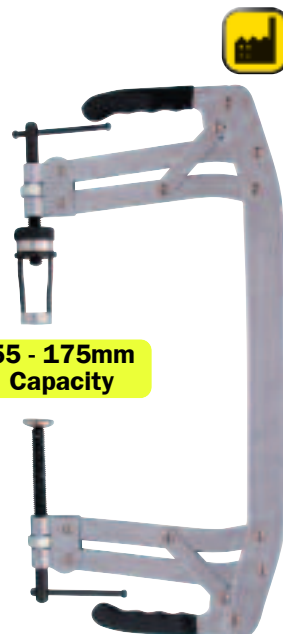


**55 - 175mm
Capacity**

Capacity Min./Max.	Weight each	Order Code KEN-503	Price/1 RND
55 - 175mm	2.20kg	-2710K	638.30

Piston Ring Pliers

To enable fast installation or removal of piston rings. A self-adjusting spring tensioned mechanism manufactured from nickel-plated steel with PVC handles for extra grip.

Capacity: 50 - 100mm (2" - 4").

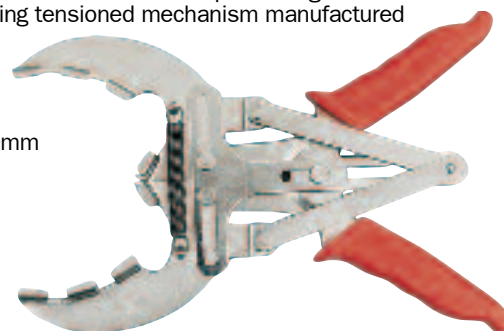


Capacity (mm)	Weight each	Order Code KEN-503	Price/1 RND
50 - 100	250g	-2090K	336.00

Straight Head Valve Seal Ring Pliers

Standard Length

For the easy removal of most valve stem seals and lower valve spring guides in restricted areas above the cylinder head.


Overall length: 250mm, 50mm reach.

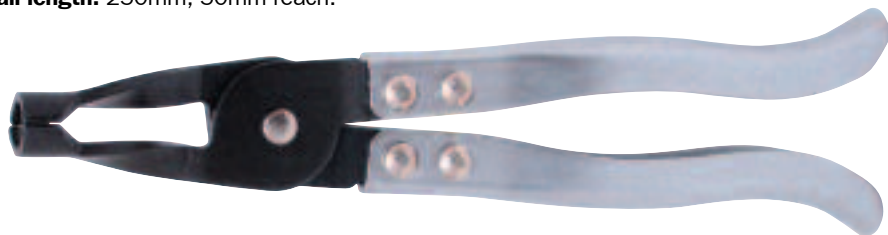

Extra Long

For the easy removal of most valve stem seals in multi-valve engines in restricted areas above the cylinder head. Gripping serrations inside the jaws aid gripping the outside diameter of the valve stem seal. Steel pliers with double rivetted metal handles.

Overall length: 270mm, 80mm reach.

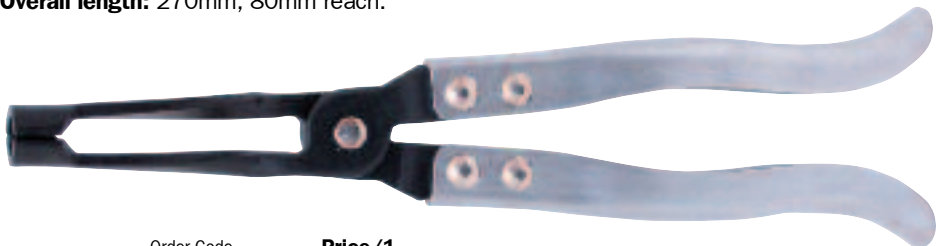

Type	Order Code KEN-503	Price/1 RND
Standard	-2680K	321.50
Extra Long	-2690K	350.40



Cylinder Hone

For honing of brake cylinders and piston bores with capacities between 19 - 68mm. Self aligning flexible shaft and leg assembly for smooth operation at all speeds. Honing diameter and pressure is adjusted via a simple, spring and cone mechanism. Suitable for use with a variable speed electric or air drill and fits into all 3 jaw chucks. Supplied complete with a medium grade stone set. For storage purposes legs are retained in position by a triangular clip. This can be removed using long nose pliers or tweezers and should be retained for further use. Replacement stone sets available.

Use brake fluid for cutting lubricant.

Overall length: 200mm.



Heavy Duty Cylinder Hone

For honing of brake cylinders and piston bores with capacities between 51 - 178mm. Self-aligning flexible shaft and leg assembly for smooth operation at all speeds. Honing diameter and pressure is adjusted via a simple, spring and cone mechanism. Suitable for use with a variable speed electric or air drill and fits into all three jaw chucks. Supplied complete with a fine grade stone set. For storage purposes legs are retained in position by a triangular clip. This can be removed using long nose pliers or tweezers and should be retained for further use. Replacement stone sets available.

Use brake fluid for cutting lubricant.

Overall length: 290mm.



Type	Weight each	Order Code KEN-503	Price/1 RND
3 Leg	380g	-2920K	496.30
Replacement Stones - 100 x 9mm - 3 Piece			
Fine	88g	-2950K	203.80
Medium	93g	-2960K	203.80
Coarse	97g	-2970K	203.80

Type	Weight each	Order Code KEN-503	Price/1 RND
3 Leg	105g	-2940K	179.00
Replacement Stones - 29 x 4.5mm			
Medium	83g	-2980K	87.20

Cylinder Hone Set

Four different honing tools in one set suitable for honing/deglazing car brake and clutch cylinders, motorcycle, lawnmower, outboard motor engine cylinders, small bore car engine cylinders with capacities between 18 - 89mm. Self-aligning flexible shaft and leg assembly for smooth operation at all speeds and easy alignment. Honing diameter and pressure is adjusted via a simple, spring and cone mechanism. Suitable for use with a variable speed electric or air drill and fits into all three jaw chucks. Supplied in a plastic blow-moulded case.

Overall length: 200mm.

Set Contents:

Main honing body,
twin leg set - 50mm,
triple leg set - 50mm,
triple leg set - 60mm;
three sets of medium stones:
19 x 4.5mm (x3 off),
29 x 4.5mm (x5 off) and
51 x 7.0mm (x3 off).

Twin Leg 18 - 64mm

For small brake cylinders.
50mm twin leg set
and 2x 29mm stones.
(NB Ready assembled in kit)

Triple Leg 19 - 68mm

For large brake/clutch cylinders. Use medium collar, 50mm triple leg set and 3x 29mm stones.

Triple Leg 32 - 89mm

For disc brake cylinders. Use large spring, 60mm triple leg set and 3x 19mm stones.

Triple Leg 32 - 89mm

For small engine cylinders. Use large spring, 60mm triple leg set and 3x 51mm stones.



Replacement Stone Sets Medium- 3 Piece

L x W (mm)	Weight each	Order Code KEN-503	Price/1 RND
19 x 4.5	83g	-2990K	203.80
29 x 4.5	89g	-2980K	87.20
51 x 7.0	99g	-3000K	203.80


Type	Weight each	Order Code KEN-503	Price/1 RND
4-in-1	248g	-2930K	337.30

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

**KENNEDY
PROFESSIONAL**

2-in-1 Padded Creeper Board & Seat

Heavy duty steel frame with powder coat finish. Vinyl coated cushioning. Quickly converts from creeper to seat. Adjustable back and parts tray when in the seat position.

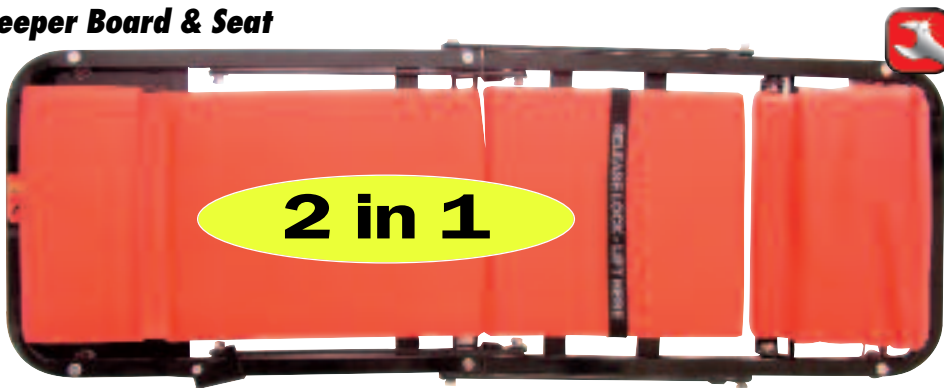

Size L x W x H (mm)	Weight each	Order Code KEN-503	Price/1 RND
1050 x 480 x 100	13.0kg	-7300K	1587.10

Padded Creeper Board

Both the creeper board and seat framework are manufactured from heavy steel with a powder paint finish. Furnished with a vinyl covered cushioning and are fitted with castor wheels for ease of movement.



Padded Creeper Seat

The creeper seat is fitted with a parts tray for tools and components.

Type	Size L x W x H (mm)	Weight each	Order Code KEN-503	Price/1 RND
Board	1050 x 480 x 100	7.00kg	-7320K	596.00
Seat	365 x 355 x 355	3.50kg	-7340K	439.60

Creeper Board with Magnetic Trays

KMC01

High-impact moulded plastic creeper board lets you work under vehicles with ease. Low profile design to provide greater clearance. Padded headrest with removable magnetic tool trays and 6x 75mm PVC coated caster wheels.

Capacity: 113kg (250lbs).

Dimensions (L x W x H):

1020 x 475 x 120mm.

Weight: 5kg.



NEW

Type	Size L x W x H (mm)	Weight each	Order Code KEN-503	Price/1 RND
Board	1020 x 475 x 120	5.00kg	-7420K	596.00

**SENATOR
QUALITY TOOLING**

Lightweight Plastic Creeper Board

Durable, lightweight moulded plastic creeper board ideal for use in garages. Padded headrest with 4x 50mm polypropylene caster wheels.

Capacity: 127kg (280lbs).

Dimensions (L x W x H):

910 x 405 x 105mm.

Weight: 3kg.



NEW



Type	Size L x W x H (mm)	Weight each	Order Code SEN-503	Price/1 RND
Board	910 x 405 x 105	3.00kg	-7378K	268.20

KENNEDY
QUALITY INDUSTRIAL TOOLING

30+ 7 LED Rechargeable Worklight - 230V

37 super bright LEDs. Dual use as an inspection lamp or directional torch. Moisture protection IP44. Two magnets and two 360° swivel hanging hooks for hands free applications. Lower quarter of lamp rotates 180° to use as a stand. Supplied with AC/DC mains charger and 12V DC in-car charger for portable charging. 7.2V (800mAh) Lithium-Ion battery. Main light lasts up to four hours, and directional light lasts up to 20hrs, when fully charged.



NEW



Voltage	Weight each	Order Code	Price/1 RND
230V	260g	KEN-503	-5100K
			303.40

24 LED Worklight

LWL024

24 super bright LEDs. Magnetic base. Soft touch durable composite casing. 360° swivel hanging hook for hands free applications. 3x AA batteries not supplied. Lasts for 4 - 5 hours approx. IP20 moisture protection.

Length: 208mm.



NEW



Type	Weight each	Order Code	Price/1 RND
3x AA Batteries	260g	KEN-503	-5110K
			59.40

Lead Lamp Wire Cage

Designed for the professional, with heavy duty rubberised handle, wire protection cage with integral hook and 4.8m of cable. Accepts screw-in (ES) type bulb (supplied separately).



4.8m CABLE

Voltage	Weight each	Order Code	Price/1 RND
240V	995g	KEN-503	-5380K
			219.30

LED Inspection Lamps with Swivel Clamp

The high light output and durable construction make them ideal for use in engine bays and other low light work areas. The ball-jointed swivel clamp gives maximum positioning versatility. Convenient grip mounted ON/OFF switch. Oil, petrol and UV resistant.

Rechargeable

Lasts up to 4 hours when fully charged.

12V

4.8m power cable allows use in remote areas.



Type	Order Code	Price/1 RND
Rechargeable	KEN-503	
12V	-5030K	1105.60
	-5050K	722.00

LED Inspection Lamps

Durable and robust construction with a rubber handle and end cup, plus a sturdy swivel hanging hook making it ideal for use in engine bays and other low light work areas. Anti-roll hexagonal shape with a convenient grip mounted ON/OFF switch. Main light and spot light option.

Rechargeable

Main light lasts up to 3.5hrs when fully charged using the charger supplied.



Mains Powered
High light output with low power consumption.

Type	Order Code	Price/1 RND
Rechargeable	KEN-503	
	-5080K	1194.10
Mains Lamp	-5090K	797.50

SENATOR
QUALITY TOOLING

Lead Lamp Plastic Cage

Plastic protection cage with integral hook and 4.8m of cable. Accepts screw-in (ES) type bulb (supplied separately).



4.8m CABLE

Voltage	Weight each	Order Code	Price/1 RND
240V	720g	SEN-503	-5370K
			142.90

Mechanic's Stethoscope

Professional stethoscope provides a fast and easy way to locate noises in engines or bearings and other moving parts. High quality surgical grade PVC and rubber parts for increased sound definition, plastic ear-pieces minimise outside noise with an aluminium alloy probe/needle for finding the exact location of specific noises. Supplied with rubber trumpet for checking vacuum and pressure flow. Useful for synchronising multi carburettors, helps to track dashboard rattles and is ideal for pinpointing unusual vibrations or suspected leaks, it is also shockproof.



Product Number	Order Code	Price/1 RND
MSC110	KEN-503	
	-2740K	121.60

EDISON Rechargeable Lamp

Ideal for use in automotive workshops and the construction industry. Heavy-duty rubber and polycarbonate case. Lasts up to 6hrs when fully charged. Adjustable brightness. Durable, robust and reliable. Foldaway swivel hanging hook, wall or bench mount charging base with 1.9m power cable*. 30 LEDs provide a constant high light output. Water and oil-resistant to IP68. Powered by high capacity Lithium-Ion polymer batteries. Optional flashing mode. Sealed switch. Can be stood upright. Uses induction charging technology. Battery low warning. *Screws and wall plugs for mounting the charging unit to a wall are not included.

Rated to IP68



Type	Order Code	Price/1 RND
Rechargeable Lamp	EDI-904	
	-1100K	1272.20

KENNEDY Bottle Jacks

With large cast iron bases with a steel cylinder housing and an adjusting notched saddle. Fitted with an overload protection valve. Two piece 'pumping' handle also operates hydraulic release.

Use on a firm level surface. **DO NOT** work under the vehicle until another means of support, such as axle stands, are used. Models B234, B337 and B541 are supplied in a robust blow moulded carry case. **Complies with the EC Machinery Directive.**

GS and TUV approved.

(Load ratings are 'metric tonnes' i.e. 1 tonne = 1,000kg).

All supplied with spare seals.

2, 3 and 5 tonne jacks supplied in a robust plastic case



Model Number	Max Load (Tonne)	Height (mm) Min. - Max.	Max Saddle Adjustment	Weight each	Order Code KEN-503	Price/1 RND
B234	2	181 - 345	48mm	3.00kg	-5820K	153.60
B337	3	194 - 372	60mm	3.75kg	-5840K	211.20
B541	5	216 - 416	70mm	4.90kg	-5860K	264.00
B845	8	230 - 457	80mm	5.75kg	-5690K	318.40
B1246	12	230 - 465	80mm	7.50kg	-5710K	412.80
B1546	15	230 - 460	80mm	8.50kg	-5730K	465.50
B2045	20	242 - 452	60mm	11.0kg	-5750K	518.30

2 Tonne Low Profile Service Trolley Jack

Low Profile Trolley Jacks have strong, robust steel chassis to provide stability when under load. A low entry height. Heavy duty fixed direction castors and swivel castors ensure easy positioning under the vehicle prior to lifting. The pump handle with comfort rubber grip is to rapidly raise and lower the load arm and the vehicle. For use on a firm level surfaces.

DO NOT work under the raised vehicle until another means of support, such as axle stands are in place.



Model Number	Maximum Load	Height (mm) Min. - Max.	Weight each	Order Code KEN-503	Price/1 RND
T5359	2000kg	89 - 359	14.5kg	-6520K	1274.70

2.5 Tonne Low Profile Trolley Jack

Low Profile Trolley Jacks have strong, robust steel chassis to provide stability when under load. A low entry height. Heavy duty fixed direction castors and swivel castors ensure easy positioning under the vehicle prior to lifting. The pump handle with comfort rubber grip is to rapidly raise and lower the load arm and the vehicle. For use on a firm level surfaces.

DO NOT work under the raised vehicle until another means of support, such as axle stands are in place.



Model Number	Maximum Load	Height (mm) Min. - Max.	Weight each	Order Code KEN-503	Price/1 RND
T450L	2500kg	85 - 450	36kg	-6530K	3002.40

Heavy Duty Bottle Jacks

With machined/cast steel bases and cylinder housings. Fitted with an overload protection valve. Three piece 'pumping' handle also operates hydraulic release. Use on a firm level surface. **DO NOT** work under the vehicle until another means of support, such as axle stands, are used.



Model Number	Max Load (Tonne)	Height (mm) Min. - Max.	Max Saddle Adjustment	Weight each	Order Code KEN-503	Price/1 RND
B3047	30	285 - 475	-	23.0kg	-5770K	1598.10
B5048	50	300 - 480	80mm	34.0kg	-5790K	2279.80

2 Tonne Low Profile Long Reach Trolley Jack

Low profile long reach trolley jacks have strong, robust steel chassis to provide stability when under load. A low entry height. Heavy duty fixed direction castors, swivel castors and inside wheel ensure excellent manoeuvrability and easy positioning under the vehicle prior to lifting. The foot pedal is to rapidly raise and lower the load arm and the vehicle. The long reach pump handle has a comfort rubber grip. Includes a practical tray for carrying tools and a rubber pad for the saddle. For use on a firm level surfaces.



DO NOT work under the raised vehicle until another means of support, such as axle stands are in place.

Model Number	Maximum Load	Height (mm) Min. - Max.	Weight each	Order Code KEN-503	Price/1 RND
T510L	2000kg	76 - 510	42kg	-6570K	4590.90
T525L	3000kg	140 - 525	50kg	-6580K	5399.80

Air Trolley Jack - 20/40T 2 Stage

For use when lifting heavy vehicles such as lorries etc. This industrial air jack has a robust steel chassis, 'T' bar handle with integral air control valve and two extensions for increased lifting height. It requires an air pressure of 116 - 174psi (8 - 12bar) and a supply rate of 105ltr/min (3.7cfm).



JTA2040

Air supply: 116 - 174psi (8 - 12bar).

Air consumption: 105ltr/min (3.7cfm).

Lifting capacity: 20T/40T.

Base height: 210mm.

Lifting height:

40T - 433mm,

20T - 520mm.

Air inlet size: 1/4NTP.

Model Number	Maximum Load	Height (mm) Min. - Max.	Weight each	Order Code KEN-503	Price/1 RND
JTA2040	40T	210 - 520	74kg	-7120K	15624.90

KENNEDY Trolley Jack

Strong steel chassis provides stability when under load. Fixed direction castors and swivel castors for easier positioning under vehicles. Long reach single piece pump handle with comfort rubber for rapid raising and lower. Safety overload protection valve prevents overload damage to hydraulic mechanism. Integral carry handle.
GS and TUV approved.

T238

Type: with case.
Dimensions: 525 x 225 x 145mm.
Maximum load: 2,000kg.
Minimum height: 130mm.
Maximum height: 380mm.

T2.249

Type: with case.
Dimensions: 695 x 344 x 180mm.
Maximum load: 2,250kg.
Minimum height: 145mm.
Maximum height: 495mm.

T280

Type: long reach.
Dimensions: 1150 x 360 x 210mm.
Maximum load: 2,000kg.
Minimum height: 140mm.
Maximum height: 800mm.



Group 270



T280 Model



Model Number	Capacity	Weight each	Order Code KEN-503	Price/1 RND
T238	2 Tonne	12.0kg	-6320K	1132.20
T2.249	2¼ Tonne	36.5kg	-6350K	2044.10
T280	2 Tonne	58.0kg	-6920K	4885.50

Spares

Description	Weight each	Order Code KEN-567	Price/1 RND
Torsion Spring for T280	49g	-7880K	26.80
Torsion Spring for T2.249	49g	-7860K	108.60
Seal Repair Kit for T238	7g	-8160K	30.00
Seal Repair Kit for T2.249	4g	-8180K	39.00

3 Tonne Quick Lift Trolley Jack

3 tonne capacity. One stroke instant lift foot pedal, raises the saddle up to jack point to increase productivity. Constructed from heavy gauge steel. 1m, two-piece handle. 120mm diameter saddle. Automatic safety overload protection. Positive twist, lock and release mechanism. Heavy duty rear swivelling castor wheels.



QUICK LIFT

Maximum load: 3000kg.
Minimum height: 145mm.
Maximum height: 490mm.



Capacity	Weight each	Order Code KEN-503	Price/1 RND
3 Tonne	39.5kg	-7100K	2709.20

Ratcheting Axle Stands


Suitable for supporting raised vehicles or equipment. Protective red enamel coating. 10-position ratchet design that automatically locks when raised.



Capacity/pair	Per Stand	Min. - Max. Height	Order Code KEN-503	Price/Pr RND
4 Tonne (4000kg)	2T	265-418mm	-5520K	476.20
6 Tonne (6000kg)	3T	280-420mm	-5530K	779.70
12 Tonne (12000kg)	6T	390-608mm	-5560K	1982.50

Scissor Jack

Made from heavy-duty steel with a rubber saddle which provides a positive grip and prevents damage to jacking points. Designed to safely raise vehicles. Easy to use and compact for easy storage. 1 Tonne (1000kg) safe working load. Wide base plate for extra stability.

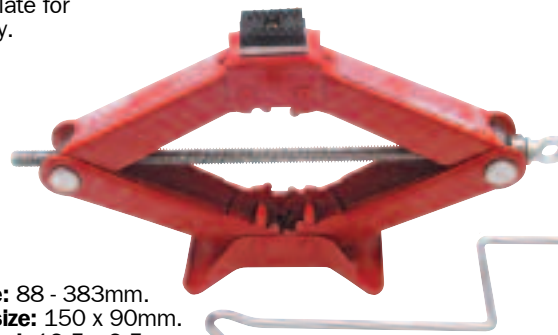

Lifting range: 88 - 383mm.
Base plate size: 150 x 90mm.
Spindle thread: 12.5 x 2.5mm.

Model Number	Capacity	Weight each	Order Code KEN-503	Price/1 RND
KSJ010	1 Tonne	2.80kg	-5920K	209.00

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

KENNEDY Heavy Duty Trolley Jacks


Constructed from heavy gauge steel for heavy-duty use with a large diameter saddle for a secure hold under the jacking point. Extra long handle for easy access under bigger vehicles which also tilts and locks in three positions with a built-in handle mounted safety release to prevent accidental lowering of the load. A foot pedal pump and fine adjustment are fitted on the handle for optimum vehicle height. Automatic safety overload protection and rear toe plate for easy positioning.



Model Number	Max Load (kg/Tonne)	Min Height (mm)	Max Height (mm)	Saddle Ø (mm)	Handle Pieces (mm)	Handle Length (mm)	Chassis Length (mm)	Chassis Width (mm)	Chassis Height (mm)	Net Weight (kg)
T556	5,000/5	150	560	130	1	1,200	1,420	370	200	95.0
T1056	10,000/10	160	560	150	1	1,200	1,555	490	255	145.0

1 tonne (metric ton or t) = 1000kg.

1 ton (imperial ton) = 2240lbs (1016kg).

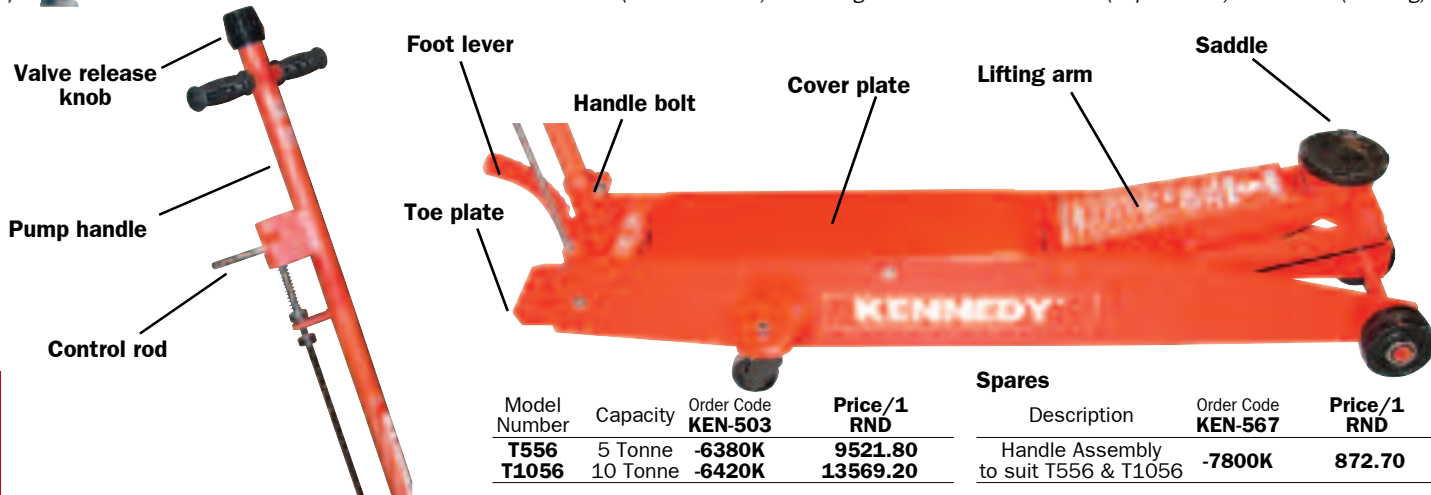

Model Number	Capacity	Order Code KEN-503	Price/1 RND
T556	5 Tonne	-6380K	9521.80
T1056	10 Tonne	-6420K	13569.20


Spares

Description	Order Code KEN-567	Price/1 RND
Handle Assembly to suit T556 & T1056	-7800K	872.70

500kg Engine Support Beam

For supporting and accurately positioning engines during maintenance operations and as an aid for the removal of gearboxes and transmissions. 500kg (1½ tonne) capacity. Adjustable width to bridge various engine compartments. Fitted with soft rubber feet to protect the bodywork. Supplied with a 92cm long chain. Supporting legs can be tilted.

Type	Capacity	Weight each	Order Code KEN-503	Price/1 RND
Engine Support	500kg		-8100K	1160.90



Telescopic Transmission Jack


Ideal for car and light commercial transmission removal and installation. Fully adjustable universal rotary saddle with adjustable corner brackets and safety chains. Foot operated pump and release valve leaves both hands free to manoeuvre transmission.

Wide base with four 3" dia. swivel-type ball bearing castors providing stability and easy manoeuvring. Two-stage flash chromed rams inhibit rust from entering the hydraulic system. Lifts from 875 to 1800mm.

Contents	TTJ500
Capacity	1½ Tonne
Ram Extensions	2
Minimum Saddle Height	875mm
Maximum Saddle Height	1800mm
Saddle Size	680 x 810mm
Chain Length	95mm
Saddle Tilt Forward	24°
Saddle Tilt Back	19°
Saddle Tilt Side	±20°
Saddle Return Weight	15.8kg (35lbs)
Base	695 x 805mm
Weight	68.5kg

Model Number	Order Code KEN-503	Price/1 RND
TTJ500	-7160K	7765.00

Description	Order Code KEN-567	Price/1 RND
Seal Repair Kit	-8210K	246.60

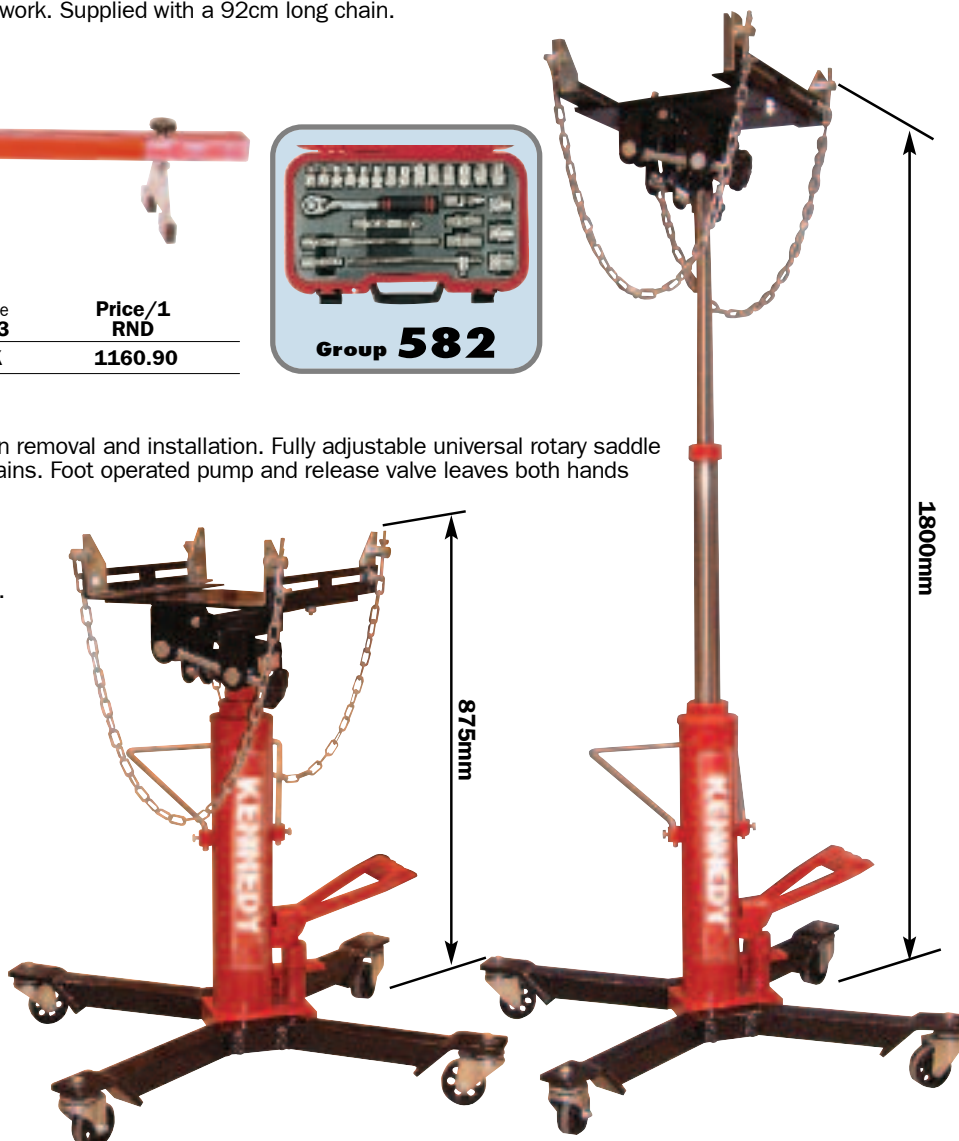

KENNEDY
QUALITY THROUGH ENGINEERING**Hydraulic
Nut Splitter Set**

The hydraulic ram provides up to 10 tonnes of direct non-twisting application of thrust that is more effective and secure than a mechanical thrust screw. Fully threaded body allows for quick and easy height adjustment. The splitter bodies are manufactured from carbon steel.

8 Piece Set contents:

1x hydraulic ram.
1x splitter body $\frac{3}{8}$ " diameter capacity.
1x splitter body $\frac{1}{2}$ " diameter capacity.
1x splitter body $\frac{5}{8}$ " diameter capacity.
1x splitter body $\frac{3}{4}$ " diameter capacity.
1x splitter body 1" diameter capacity.
1x threaded attachment sleeve.
1x oil bottle.

**8
PIECES**

Product Number	Weight each	Order Code KEN-503	Price/1 RND
HNS100	4.45kg	-4300K	4006.80

Parts Washers

Used in garage, workshop and industrial applications for degreasing components for inspection and prior to assembly. Recirculated cleaning fluid is filtered before entering the pump and being directed over the work piece. Flexible chrome finish metal delivery hose. Heavy duty non-welded one piece tank. Fully enclosed electric nylon pump. Self-latching fusible linked lid closes in the event of a fire. Triple baked enamel finish. Accepts all common degreasing agents. Shelf keeps parts out of solvent during inspection and drying. Immersion soaking when the parts shelf is removed. Fitted with a three pin moulded plug and a 1.6m power cable.

PWB013 - Bench Standing

Minimum agent capacity 9ltr. Maximum agent capacity 13ltr. Rubber feet. 240V

Overall size (L x W x H): 470 x 340 x 250mm.

Tank size (L x W x H): 400 x 310 x 230mm.


Power rating: 25W.

Voltage: 240V.

Rated input: 0.3A.

**AUTOMOTIVE - NUT SPLITTERS****Nut Splitters**

Mechanical drop forged, hardened and tempered plated steel. Ideal for releasing seized/damaged nuts etc.

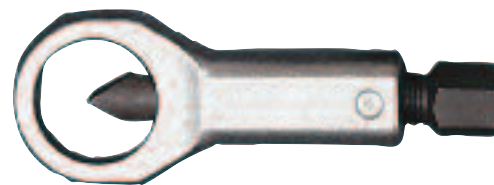

Product Number	Capacity (mm/Inch)	Weight each	Order Code KEN-503	Price/1 RND
1	9 - 12 ($\frac{3}{8}$ " - $\frac{1}{2}$ ")	90g	-4090K	219.60
2	12 - 16 ($\frac{1}{2}$ " - $\frac{5}{8}$ ")	170g	-4160K	261.10
3	16 - 22 ($\frac{5}{8}$ " - $\frac{7}{8}$ ")	350g	-4220K	334.60
4	22 - 27 ($\frac{7}{8}$ " - $1\frac{1}{16}$ ")	600g	-4270K	383.20

4 Piece Set

Contents (1 of each): No.1, No.2, No.3, No.4.

**4
PIECES**

Number of Pieces	Weight each	Order Code KEN-503	Price/1 RND
4	1.40kg	-4290K	1179.60

PWF050 - Floor Standing

Minimum agent capacity 40ltr. Maximum agent capacity 50ltr. Fitted with a drain plug for easy maintenance.

Removable parts basket.

Built in replaceable filter.

Spare filter included.

Overall size (L x W x H):

800 x 550 x 890mm.

Tank size (L x W x H):

725 x 490 x 270mm.

Height of working area: 750mm.

Power rating: 25W.

Voltage: 240V.

Rated input: 0.3A.

**Replacement Parts**

Description	Order Code KEN-567	Price/1 RND
Flexible Hose for PWB013	-6050K	81.80
Flexible Hose for PWF050	-6060K	108.00
Filter for PWB013	-8600K	91.80
Filter for PWF050	-8640K	91.80
Pump for PWF050/PWB013	-8700K	457.40



Model Number	Weight each	Order Code KEN-503	Price/1 RND
PWB013	6.50kg	-8600K	1094.60

Model Number	Weight each	Order Code KEN-503	Price/1 RND
PWF050	31.0kg	-8640K	2332.30

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

KENNEDY
QUALITY TOOLING

Oil Drain Plug Key Set

DPK017

A comprehensive set of quality $\frac{3}{8}$ " square drive oil drain plug keys with tommy bar. Made from satin finished chrome vanadium.

Contents:

Male square: 7mm, 8mm ($\frac{5}{16}$ "), 9mm, ($\frac{3}{8}$ "), 10mm, 11mm, 12mm and 13mm. Female square: 10mm. Male hex: 8, 9, 10, 12, 14 and 17mm. Male triangular 10mm. Tommy bar.


**17
PIECES**



Product Number	Number of Pieces	Order Code KEN-503	Price/1 RND
DPK017	17	-1720K	524.00

Strap Type Oil Filter Remover


Used for gripping round and irregular shaped items, tubes and piping. Ideal for oil filters, hot radiator caps and hub caps.

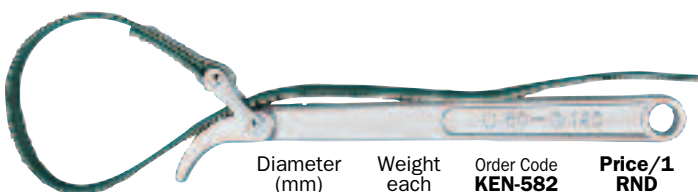

Diameter (mm)	Weight each	Order Code KEN-582	Price/1 RND
60 - 140	280g	-9500K	296.00

Chain Wrench Oil Filter Remover


Used for gripping round and irregular shaped items, tubes and piping. Ideal for oil filters, hot radiator caps and hub caps.

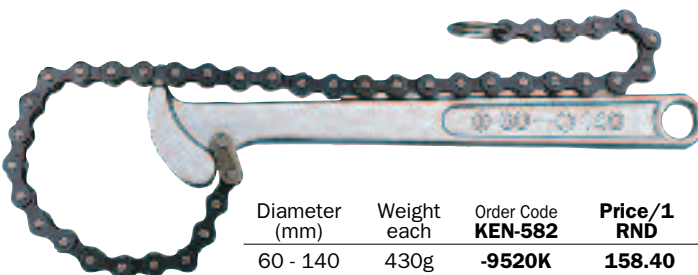

Diameter (mm)	Weight each	Order Code KEN-582	Price/1 RND
60 - 140	430g	-9520K	158.40

Oil Filter Pliers

Manufactured from hardened and tempered chrome vanadium with chemically blackened corrosion resistant finish and vinyl grip. Three position rapid jaw adjustment with high grip tooth profile, ensures the minimum amount of effort is required to remove or fit oil filters.

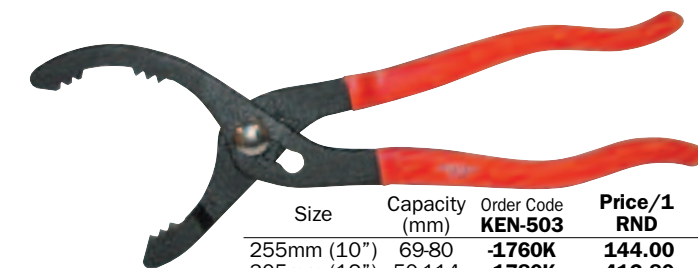

Size	Capacity (mm)	Order Code KEN-503	Price/1 RND
255mm (10")	69-80	-1760K	144.00
305mm (12")	50-114	-1780K	412.80

Oil Filter Cap Wrench Set

Cap type filter wrenches manufactured from chrome vanadium with a satin finish. Use with $\frac{3}{8}$ " or $\frac{1}{2}$ " square drive wrenches to remove paper cartridge style oil filters.

Contents: 24, 27, 30, 32, 36, 38mm and $\frac{1}{2}$ " - $\frac{3}{8}$ " adaptor.



**7
PIECES**



Diameter (mm)	Weight each	Order Code KEN-503	Price/1 RND
60 - 140	430g	-1790K	492.30

Three Jaw Oil Filter Wrench

For use with ratchet handles, extension bars, flexible drives etc. With $\frac{3}{8}$ " square drive and hexagon adaptor, or use with 19mm/ $\frac{3}{4}$ " AF spanners or sockets. All steel construction, chrome plated with milled teeth on gripping arms for positive action when loosening or tightening.




Spread/Range	Weight each	Order Code KEN-503	Price/1 RND
60 to 120mm	600g	-1800K	159.40

SENATOR
QUALITY TOOLING

Oil Filter Wrench

Articulated filter wrench with swivel action tightener. Suitable for oil filters with limited access.

Capacity: 75 - 110mm.

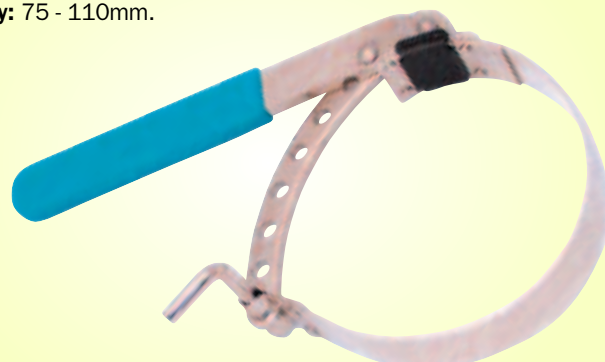

Capacity	Weight each	Order Code SEN-503	Price/1 RND
75 to 110mm	320g	-1800K	67.20



Mechanical Puller - 2 Jaw

Industrial Reversible/Double-Ended Adjustable


Used for the removal of gears, ball races, bearings, pulleys and sprockets from a drive shaft. With reach capacities of 75, 100, 150 and 200mm.

All sizes have double-ended, adjustable, reversible legs and can be used for internal and external applications.

Selection

Always use a three jaw puller whenever possible. This produces better load distribution across the jaws and easier and safer removal of the part. Determine what 'spread' is needed this is the width of the part to be removed.

The reach capacity is determined by the depth of the part to be removed.

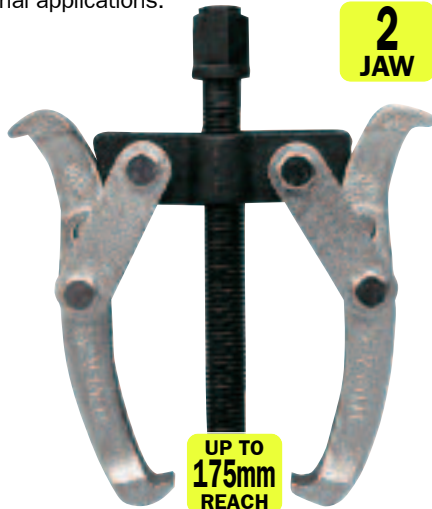

Product Number	Spread (mm)	Reach (mm)	Thread Length	Order Code KEN-503	Price/1 RND
MP275	40 - 75	60	125	-3030K	182.50
MP2100	50 - 100	70	160	-3040K	275.80
MP2200	60 - 150	120	240	-3060K	448.40
MP2150	80 - 200	175	335	-3080K	837.50

Spare Jaws (Supplied individually)

To Suit Puller	Order Code KEN-567	Price/1 RND
MP275	-5330K	37.30
MP2100	-5340K	56.30
MP2200	-5360K	102.80
MP2150	-5380K	206.30

Mechanical Pullers

3-Jaw Industrial Reversible Double-Ended Adjustable

Manufactured from drop forged chrome vanadium steel.



Product Number	Spread (mm)	Reach (mm)	Thread Length	Order Code KEN-503	Price/1 RND
MP375	40 - 75	60	125	-3130K	292.70
MP3100	50 - 100	70	160	-3140K	404.80
MP3150	60 - 150	120	240	-3160K	678.50
MP3200	80 - 200	175	335	-3180K	1284.20

Spare Jaws

To Suit Puller	Order Code KEN-567	Price/1 RND
MP375	-5330K	37.30
MP3100	-5340K	56.30
MP3150	-5360K	102.80
MP3200	-5380K	206.30


Long Reach Mechanical Puller - 2 Jaw

Reversible

Manufactured from drop forged hardened alloy steel. Three position extra long legs to be used where access is limited.

The puller legs are securely located on the bearing by screwing down the tapered nut to lock the arms in position. The legs are then retracted with the bearing by turning the T-bar to extend the thrust bolt on to fixed shaft.

Spread: 10 - 50mm.
Reach: 300mm.

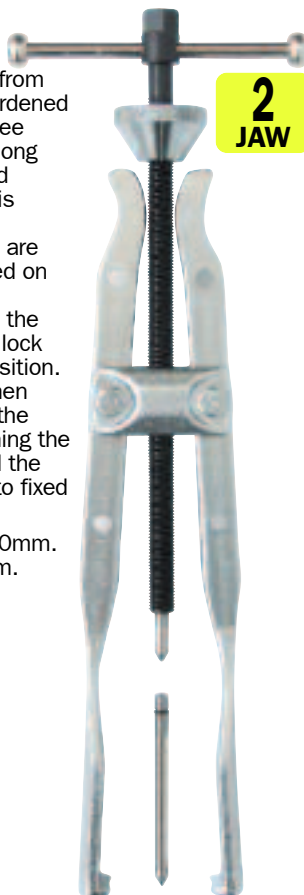

300mm REACH

EXTRA LONG

Reach	Weight each	Order Code KEN-503	Price/1 RND
300mm	1.20kg	-3320K	850.30

Mechanical Puller - Industrial Kits

2 & 3 Jaw Reversible/Double-Ended/Adjustable

Manufactured from chrome vanadium steel. Each kit contains the components to assemble a 2 or 3 jaw external or internal puller. The legs can be set at two different height positions.



Assemble to produce:
Three jaw external configuration.



Spread (mm)	Reach (mm)	Thread Length	Order Code KEN-503	Price/1 RND
41 - 53	75	80	-3230K	362.00
40 - 87	100	100	-3240K	504.30
60 - 139	150	165	-3260K	820.40
80 - 194	200	240	-3280K	1508.70

Spare Jaws (Supplied individually)

To Suit Puller	Order Code KEN-567	Price/1 RND
41 - 53mm	-5330K	37.30
40 - 87mm	-5340K	56.30
60 - 139mm	-5360K	102.80
80 - 194mm	-5380K	206.30

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

KENNEDY
QUALITY EQUIPMENT FOR THE


Bearing Separators

For removing bearings, gears and bushes from shafts where access with a mechanical puller is restricted.

Separators have tapered edge for insertion behind close fitting bearings, gears and bushes.

Jaw hardness: 42° - 45° HRC.

UP TO
150mm
CAPACITY

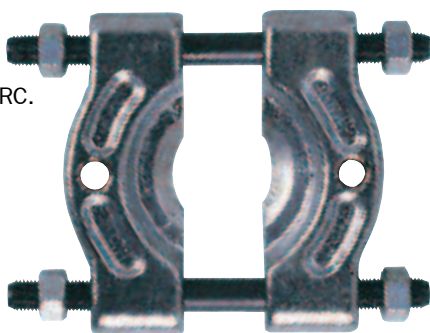

Product Number	Capacity (mm)	Order Code KEN-503	Price/1 RND
BS50	30 - 50	-4520K	288.00
BS75	50 - 75	-4540K	360.00
BS105	75 - 105	-4560K	489.50
BS150	105 - 150	-4580K	1180.60

Mechanical Separator Set

30 - 75mm

For removing bearings, gears, sprockets and bushes.
Metal storage case.

Contents:

- 1x 7" thrust bolt.
- 1x 30 - 50mm separator.
- 1x 50 - 75mm separator.
- 2x 80 and 100mm main rods.
- 2x 90 and 110mm extension rods.
- 1x beam.



8
PIECES

Product Number	Weight each	Order Code KEN-503	Price/1 RND
MS12	4.95kg	-4750K	1373.40

Ball Joint Separators

Manufactured from drop forged alloy steel with slim tapered fork jaw for easier access into confined areas.
Suitable for use on most car and light commercial vehicle ball joints.



100mm
overall length

160mm
overall length

100mm Overall Length - Restricted Access

Designed for use in hard to reach and confined areas.
Mainly for use on Asian import cars.

Overall Length	Capacity	Throat Depth	Throat Width	Weight each	Order Code KEN-503	Price/1 RND
100mm	22mm	22mm	22mm	740g	-1400K	396.40
160mm	45mm	22mm	18mm	1120g	-4400K	668.10

Ball Joint Servicing Kit

Made from cast iron and hardened carbon steel, this kit is designed for the removal of press fit type ball joints without having to remove the control arm from the vehicle. The kit can also be used for removing brake anchor pins and the servicing of universal joint bearings.



Description	Weight each	Order Code KEN-503	Price/1 RND
Ball Joint Servicing Kit	7.60kg	-1300K	1227.00

Spring Compressor Sets

Hardened steel screws and cast steel claws.

2 Legged

Central hexagonal drive with wrap over coil claws which can be reversed for spreading applications. Suitable for use on cars and light commercial vehicles.


Use with 21mm/¹³/₁₆" AF open ended spanner.

Maximum jaw opening: 250mm.

3 Legged

Each leg has one free moving claw and one threaded claw with a ¹/₂" square drive or 24mm hexagon drive - can be used with air tools or spanners. Fitted with safety hooks to prevent accidental release. Suitable for use on cars and commercial vehicles and allows safe compression of heavier springs.

Maximum jaw opening: 240mm.

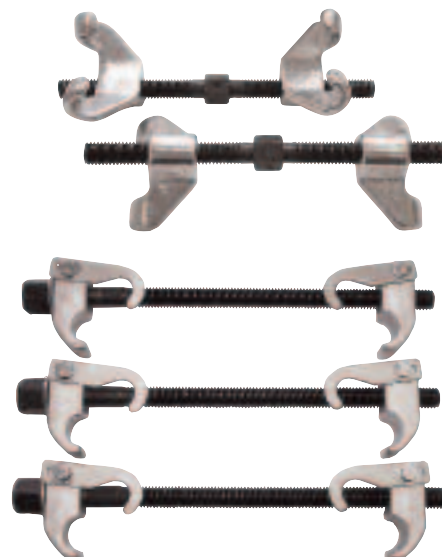

Product Number	Number of Legs	Weight each	Order Code KEN-503	Price/1 RND
CCD225	2	1.20kg	-2410K	507.40
CCD324	3	3.00kg	-2420K	863.30



6 Way Hydraulic Puller Set

10 ton capacity hydraulic ram with tommy bar.
Supplied with three position puller legs covering a spread of 100 - 240mm and reach of 0 - 150mm.
Can be used as a two or three legged puller with the same head.

Contents:

1x combination head.
1x hydraulic ram.
3x three position puller legs.
6x leg connectors.
6x screw nuts, bolts and washers.
1x 50mm extension rod.
1x centre adaptor.
1x blow moulded storage case.



Hydraulic Separator Sets

HS7 105 - 150mm

HS11 75 - 105mm

For removing bearings, gears, sprockets and bushes.
10 ton capacity hydraulic ram with tommy bar. Metal storage case.


Both sets contain:

1x hydraulic ram.
1x separator.
2x 200mm main rods.
2x 230mm extension rods.
1x beam.
1x ram nut.
HS7 (only) also contains
1x 80mm push plate.
1x 50mm ram extension.
1 x 100mm ram extension.

**8
PIECES**



HS7 Set Illustrated



Product Number	Weight each	Order Code KEN-503	Price/1 RND
HS7	15.0kg	-4700K	2984.00
HS11	9.30kg	-4720K	2972.10

Hydraulic Puller/ Separator Set

10 ton capacity hydraulic ram with tommy bar.
Suitable for agricultural machines, garage and industrial use.

Contents:

1x hydraulic ram (KEN- 503-7200K).
3x 4", 6" and 8" puller legs.
1x twin head.
1x triple head.
1x 50mm ram extension.
1x 100mm ram extension.
2x 200mm main rods.
2x 230mm extension rods.
1x 75 - 105mm separator.
1x bolt.
1x ram ring. 1x ram nut.
Blow moulded storage case.




**2&3
JAW**

**250mm
REACH**

Model Number	Weight each	Order Code KEN-503	Price/1 RND
HP19	4.90kg	-3500K	2176.10

Hydraulic Ram

10 ton capacity grease filled hydraulic ram with spring loaded plunger. Provides direct non-twisting application of thrust that is more effective and secure than a mechanical thrust screw.
Fully threaded body allows for quick and easy height adjustment.

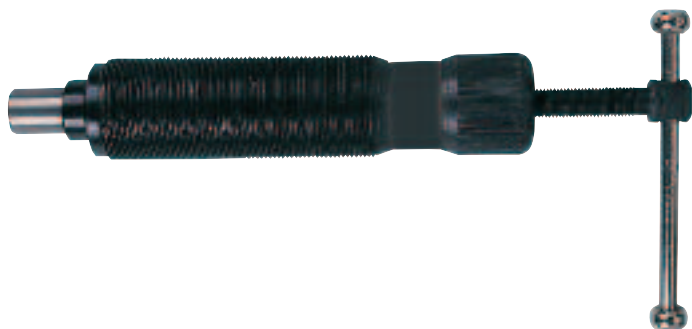

Model Number	Weight each	Order Code KEN-503	Price/1 RND
HR10T	1.40kg	-7200K	827.30

Model Number	Order Code KEN-567	Price/1 RND
Seal Repair Kit	-8230K	101.70



Model Number	Weight each	Order Code KEN-503	Price/1 RND
HPS22	16.0kg	-3520K	3923.90

KENNEDY
QUALITY IN EVERY MOLE TORQUE

**Mechanical
Puller Sets**

SWP9 Steering Wheel

Suitable for GM, Ford and Chrysler vehicles.
Also suitable for removing pulleys and fly wheels.

Contents:

- 1x yoke,
- 1x thrust bolt.
- 1x thrust cap.
- 2x 75mm screws
($\frac{5}{16}$ " x 24 UNF).
- 2x 75mm screws
($\frac{3}{8}$ " x 16 UNC).
- 2x 90mm screws
($\frac{5}{16}$ " x 18 UNC).
- 1x plastic storage tray.



HPB9 Harmonic Balance

For harmonic balance removal, timing gears and other parts with bolt circle diameters from 38 to 117mm ($1\frac{1}{2}$ " to $4\frac{5}{8}$ ").

Ductile steel yoke.

Contents:

- 1x yoke.
- 1x thrust bolt.
- 1x ram nut.
- 3x 75mm screws
($\frac{3}{8}$ " x 24 UNF).
- 3x 75mm screws
($\frac{3}{8}$ " x 16 UNC).
- 1x plastic storage tray.



CP18 Combination

Steering wheel puller suitable for GM, Ford and Chrysler vehicles.

For harmonic balance removal, timing gears and other parts with bolt circle diameters from 38 to 117mm ($1\frac{1}{2}$ " to $4\frac{5}{8}$ ").

Contents:

As SWP9 and HPB9 above.



Model Number	Weight each	Order Code KEN-503	Price/1 RND
SWP9	1.00kg	-3400K	228.00
HPB9	1.80kg	-3420K	383.70
CP18	2.75kg	-3440K	636.70

Slide Hammer Puller Set

Multi-function

Fully hardened and chromed carbon steel slide hammer with a 1.2kg weight.
Slide hammer design for removing bearings from blind housings. Suitable for use where a shaft or other solid surface is not available for a thrust bolt or hydraulic ram to push against. The bearing is removed by the impact action of the slide hammer weight hitting the stop at the end of the bar. The puller legs are securely located on the bearing by screwing down the tapered nut to lock the arms in position. Blow moulded storage case.


Contents:

- 1x T-bar.
- 1x hammer.
- 1x two jaw head.
- 1x three jaw head.
- 1x leg locking nut.
- 1x grip wrench adaptor.
- 1x tapping adaptor and hook.
- 2x axle pullers.
- 3x 120mm puller legs,
- 3x screw and nut assemblies.
- 1x blow moulded storage case.



**15
PIECES**

**2&3
JAW**

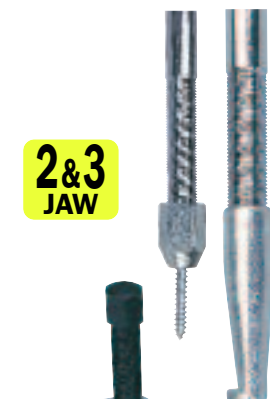

**2 Jaw
External**



**3 Jaw
External**

**3 Jaw
Internal**

**2 Jaw
Internal**

Model Number	Weight each	Order Code KEN-503	Price/1 RND
SHP8	8.20kg	-3480K	1719.60

Slide Hammer Puller Set

3 Jaw Internal & External

Multi-function


Slide Hammer Puller Set

Fully hardened and chromed carbon steel slide hammer with a 1.2kg weight.
Slide hammer design for removing bearings from blind housings. Suitable for use where a shaft or other solid surface is not available for a thrust bolt or hydraulic ram to push against. The bearing is removed by the impact action of the slide hammer weight hitting the stop at the end of the bar. The puller legs are securely located on the bearing by screwing down the tapered nut to lock the arms in position. Blow moulded case.


6 Piece Set Contents:

- 1x T-bar.
- 1x hammer 1.2kg.
- 1x 3 jaw internal puller 15 - 30mm.
- 1x 3 jaw internal puller 30 - 80mm.
- 1x 3 jaw external puller 15 - 80mm.
- 1x blow moulded case.

**6
PIECES**

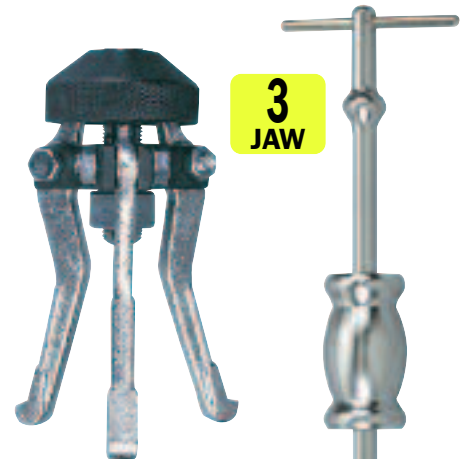

**3
JAW**

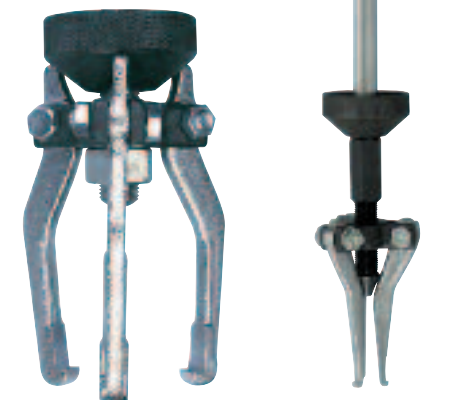


Model Number	Weight each	Order Code KEN-503	Price/1 RND
IEP	4.95kg	-3340K	2046.00


KENNEDY
PROFESSIONAL

Advance Timing Light



For checking and setting ignition timing on automotive, agricultural and marine engines. Measures ignition spark advance from 0 - 60°. For use on 12V systems. Reverse polarity protected. Accurate to 8,000rpm. 1m long removable coiled power leads. Impact resistant metal case and rubber nose cone. On/off trigger switch. Bright linear Xenon flash tube for daylight use. Focused lens provides a concentrated light. Easy to apply inductive impulse pick-up. Built in check light.

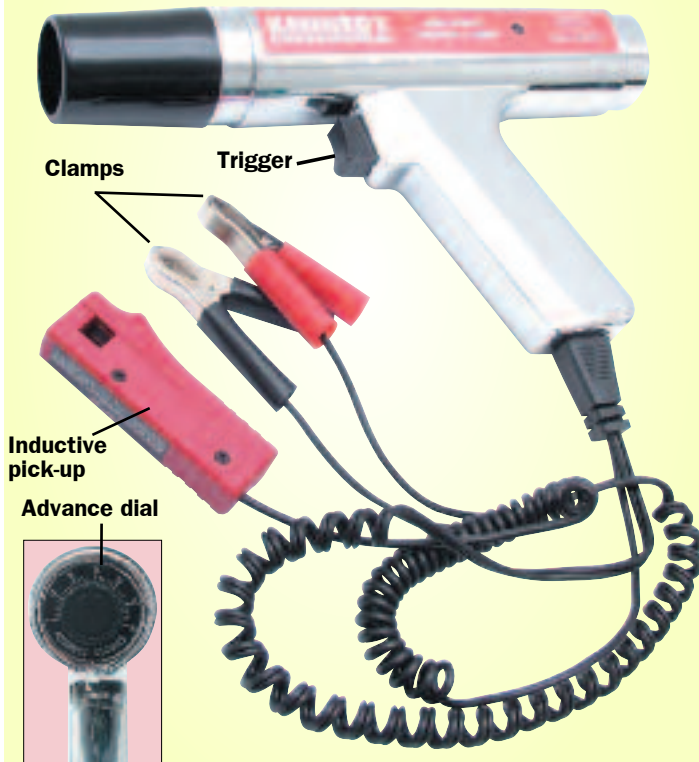

Description	Order Code KEN-503	Price/1 RND
Advance Timing light	-5320K	2162.60

KENNEDY
PROFESSIONAL

Standard Timing Light

For checking and setting ignition timing on automotive, agricultural and marine engines. For use on 12V systems. Reverse polarity protected. Accurate to 8,000rpm. 135cm long durable power leads. Impact resistant housing. On/off trigger switch. Bright linear Xenon flash tube for daylight use. Focused lens provides concentrated light. Easy to apply inductive impulse pick-up.



Description	Order Code KEN-503	Price/1 RND
Standard Timing light	-5340K	657.00

Noid Light 6 Piece Test Set

NLT060

The Kennedy® Noid light test set is for diagnosing fuel injector signal faults fast. Simply disconnect the injector harness and plug in the relevant noid light. Turn the ignition on - if the light is constant or absent, then the signal from the ignition system is at fault. Easy to use and fits a wide variety of injector harnesses.

Compatible with: GM - TBI, GM - SCPI, GM - PFI, FORD - TBI, GEO - TBI, BOSCH - PFI.

**6
PIECES**


Product Number	Number of Pieces	Order Code KEN-503	Price/1 RND
NLT060	6	-5020K	204.70

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

KENNEDY
QUALITY INSURANCE TOOLING

Automatic Battery Charger

Robust battery charger suitable for home and light workshop use. Simple and easy to use. LED indicators. For WET batteries, AGM technology and GEL batteries. Optimised charging programme. Efficient 3 stage charge. 100% rated output. Portable and lightweight. Intelligent circuit control and protection.

KBC4A

Input: 220-240V 50hz 0.65A
Output: 12VDC 1A/12VDC 4A
Net Weight: 760g

KBC8A

Input: 220-240V 50hz 0.80A
Output: 6VDC 1A/12VDC 8A
Net Weight: 760g



KBC8A



KBC4A

NEW



Model Number	Maximum Rated Current	Order Code KEN-503	Price/1 RND
KBC4A	4A	-0320K	702.00
KBC8A	8A	-0350K	777.60

Battery Booster Cable

For use on cars and light commercial vehicles. Easy starting with low power loss. Tangle-free copper cable with double insulation. Robust fully insulated colour coded clamps.

Light Duty

Suitable for 12 and 24V systems. 3m cable. 16mm² multi-stranded cable core rated to 220amps.



220amps

Medium Duty

Suitable for 12 and 24V systems. 3.5m cable. 25mm² multi-stranded cable core rated to 350amps.



350amps

Heavy Duty

Suitable for 12 and 24V systems. 4.5m cable. 35mm² multi-stranded cable core rated to 480amps.



480amps


Model Number	Amp Rating	Weight each	Order Code KEN-503	Price/1 RND
BCC 16	220	1.80kg	-5200K	544.80
BBC 25	350	3.30kg	-5250K	654.60
BBC 35	480	4.30kg	-5280K	1396.50

Adjustable Locking Roof Bars

RRB110

Easy to fit bars, no extra tools required. Manufactured from coated aluminium, complete with adjustable rubber faced foot packs. Designed to fit on to original car manufacturers roof rails. Maximum load 80kg, minimum spread 900mm, maximum spread 1100mm.

Locking keys included. Supplied in pairs.

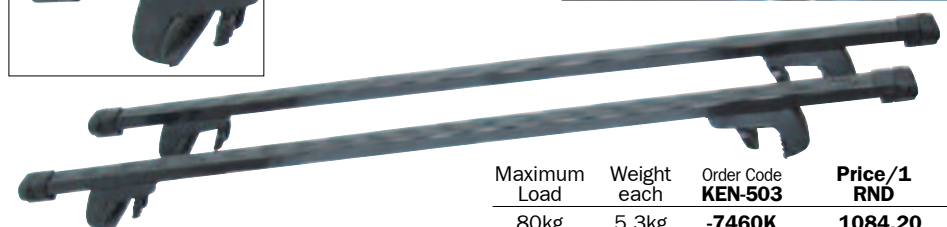

Maximum Load	Weight each	Order Code KEN-503	Price/1 RND
80kg	5.3kg	-7460K	1084.20

Steel Jerry Cans

Manufactured from 16 swg steel. Suitable for storing petrol. Suitable for storing and transportation of diesel, paraffin and motor oil. With lever type safety sealing cap and integral carrying handle. Painted outside and phosphated internally.

UN Approved, Class 3.



Capacity	Order Code KEN-503	Price/1 RND
5ltr	-9270K	448.10
10ltr	-9260K	476.80
20ltr	-9250K	522.90

Metal Spouts For Jerry Can

Capacity	Order Code KEN-503	Price/1 RND
5 & 10ltr	-9300K	259.40
20ltr	-9320K	245.20

5ltr Fuel Container

Suitable for transporting and storage of petroleum spirit and diesel. UN approved, conforms with S.I. 1982/630 Petroleum Spirit Plastic Container Regulations 1982.

Colour coded for use with different fuel types.



Colour	Weight each	Order Code KEN-503	Price/1 RND
Red	630g	-9010K	140.70
Green	630g	-9020K	140.70
Black	630g	-9030K	140.70

Non-Approved Fuel Container

Durable polyethylene containers. Diesel, petrol, chemical and oil resistant. Integral rigid dispensing spout.



Capacity	Weight each	Order Code KEN-503	Price/1 RND
5ltr	320g	-9100K	175.40
10ltr	500g	-9120K	242.20
20ltr	755g	-9140K	348.10

Steel Fuel Can

Manufactured from heavy gauge steel with an epoxy coated finish. Supplied with a flexible polythene vented pouring spout. Suitable for storage and transportation of petroleum spirit. Tested to DIN 7274, complies with UN Class 3.



Capacity	Weight each	Order Code KEN-503	Price/1 RND
10ltr	1.90kg	-9200K	503.80

KENNEDY Mini Air Compressor/ Pressure Gauge/Tyre Inflator

For inflating tyres, airbeds, boats, sports equipment and any other inflatable products. Complete with 3m of cable 12V car cigarette lighter plug, nozzles and adaptors. The dual air pressure gauge can be read in both lb/in² and kg/cm². 300psi.




Voltage	Weight each	Order Code KEN-503	Price/1 RND
12	1.3kg	-2500K	447.40

SENATOR Single Cylinder Foot Pump

Steel barrel, preset pressure gauge, rubber foot-rest pad. Standard thumb-lock connector. 24" hose length.

Capacity: 0 - 7bar/
0 - 7kgf cm² (100psi).



Capacity	Weight each	Order Code SEN-503	Price/1 RND
0 - 7 bar	1.1kg	-5350K	182.00

Fluorescent Warning Triangle

Manufactured from ABS plastic. This simple folding design combines a sturdy four footed base with its rubber grip feet and a high visibility interlocking triangle conforming to European Standard **ECE R27** and tested to **E1** specifications. Supplied in a low profile plastic carrying case.

Triangle dimensions:
440mm (each side).
Triangle height:
380mm.



Description	Order Code KEN-503	Price/1 RND
Warning Triangle	-8400K	129.40

SENATOR Telescopic Wheel Wrench

Manufactured from drop forged chrome vanadium steel. Supplied with 17/19mm double ended socket that will fit the majority of car wheel nuts. Can be used with any other 1/2" drive accessories. Extends to 500mm overall to give maximum leverage. **GS and TUV approved.**



Drive	Weight each	Order Code SEN-503	Price/1 RND
1/2"	1.00kg	-9000K	203.60

Air Line Tyre Inflator

This push on type tyre inflator is robust and has a dial type pressure gauge reading up to a maximum of 170psi. The pressure gauge is protected from accidental damage by a rubber shock guard.



Max. Pressure Reading	Weight each	Order Code KEN-503	Price/1 RND
170psi	720g	-8480K	844.80

Heavy Duty Air Line Tyre Inflator with Gauge

This heavy duty push on inflator is of rugged construction and has a clear view integral pressure gauge reading from 10 - 120psi.



Max. Pressure Reading	Weight each	Order Code KEN-503	Price/1 RND
120psi	635g	-8520K	911.80

Deluxe Type Tyre Pressure Gauge

Manufacturer's recommended pressures are based on cold tyre readings. This pressure gauge has a long body, ideal for use on cars, vans, lorries, plant and equipment. It is very robust in construction and has a maximum pressure reading of 120psi.



Max. Pressure Reading	Weight each	Order Code KEN-503	Price/1 RND
120psi	230g	-8430K	267.10

Pencil Type Tyre Pressure Gauge

This push-on gauge is suitable for cars, vans and light commercials, where readings of up to 120psi are necessary. It is of chrome plated brass construction with a pen type pocket clip.




Max. Pressure Reading	Weight each	Order Code KEN-503	Price/1 RND
120psi	43g	-8460K	65.60

4000kg Elasticated Tow Rope

Model TRE400

Two zinc plated steel safety hooks. Elasticated core minimises drag on overrun. Heavy duty stitched webbing. On tow sign. Manufactured to **BS AU 187 1983**.

Extended length: 4m.



Length	Order Code KEN-503	Price/1 RND
4m	-8240K	344.40

2000kg Tow Rope

Model TRP200

Zinc plated steel safety hook. Looped one end. Manufactured from tough high visibility polypropylene. On tow sign. Manufactured to **BS AU 187 1983**.

Length: 3.6m.



Length	Order Code KEN-503	Price/1 RND
3.6m	-8220K	121.20

Dial Type Tyre Pressure Gauges


This push-on type pressure gauge is graduated in psi and bar up to a maximum of 64psi (4.5bar). The reading is held until the release button is pressed.



Max. Pressure Reading	Weight each	Order Code KEN-503	Price/1 RND
64psi	125g	-8440K	72.00

4-Way Tyre Valve Service Tool

This case hardened tool is for the internal and external repair of valve threads, insertion and removal of valve cores.



Type	Order Code KEN-503	Price/1 RND
4-Way Tyre Valve Service Tool	-8500K	21.50

Tyre Tread Depth Gauge

This handy sized tyre depth gauge is graduated in mm and 1/32" and comes with a pen type pocket clip.



Graduation	Weight each	Order Code KEN-503	Price/1 RND
mm & 1/32"	25g	-8450K	45.40

GROUP 503 AUTOMOTIVE - SPECIAL TOOLS


KENNEDY Cleaning & Decarbonising Brush Set

20-Piece

This cleaning brush set is very versatile in use as it comes with three different material bristles and can be used either manually or with a power drill.

Contents:

Quick release screwdriver, quick release extension bar,
9, 11, 13, 15, 17 & 19mm Ø Brass Brushes,
9, 11, 13, 15, 17 & 19mm Ø Steel Brushes,
9, 11, 13, 15, 17 & 19mm Ø Nylon Brushes.

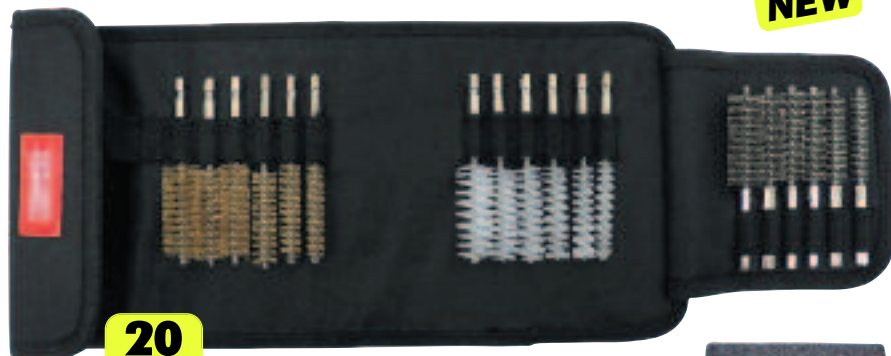

**20
PIECES**



NEW


Type	Number of pieces	Order Code KEN-503	Price/1 RND
Cleaning & carbonising brushes	20	-4990K	241.20

Standard Length Gasket Scraper Set

Rigid carbon scrapers ideal for cleaning cylinder heads, removing old sealants, carbon build up and a variety of general multi-purpose automotive applications.

Set includes blade lengths:

205 x 13mm (8" x 1/2"),
205 x 25mm (8" x 1"),
93 x 25mm (3 1/2" x 1"),
97 x 15mm (3 3/4" x 5/8").

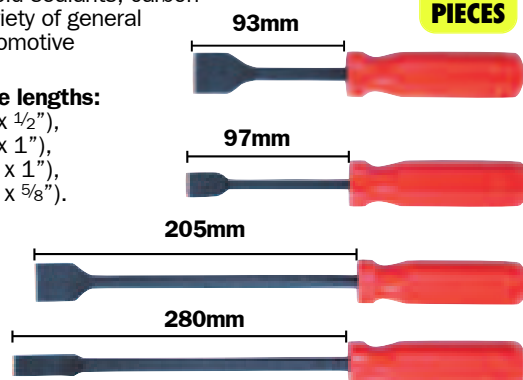


Number of Pieces	Weight each	Order Code KEN-503	Price/1 RND
4	1.10kg	-1980K	539.10

Gasket Scraper Set

Long Handled Gasket Scraper Set

For cleaning cylinder heads and removing old sealants and carbon build up. Hardened and tempered carbon steel shanks and heads are 'offset to edge' to allow easy scraping of flat surfaces. Simple 'firmer' style bevelled points with longer head lengths allow for scrapers to be re-ground several times for maximum service life. Impact resistant square section handle for secure grip even when greasy. Set includes blade widths: 19mm (3/4"), 25mm (1") and 38mm (1 1/2").

Overall length: 280mm (11").

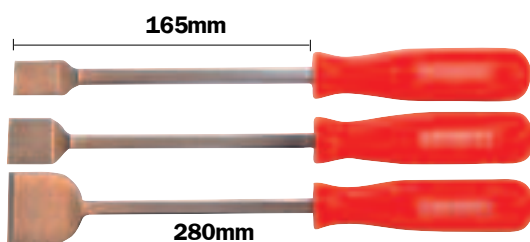

**3
PIECES**

Model Number	Weight each	Order Code KEN-503	Price/1 RND
GSL338	530g	-1700K	223.00

Spark Plug Brush Set

Set of three: nylon, brass and stainless steel.



**3
PIECES**

Type	Order Code KEN-503	Price/1 RND
Spark Plug Brushes (Set of 3)	-5000K	33.30

Spark Plug Hole Thread Chaser

Double ended for 14mm and 18mm plug hole threads. Cleans corrosion and carbon build-up from female spark plug threads and sensor sockets.

Repairs minor cross threading damage. Use with 21mm deep socket



Type	Order Code KEN-503	Price/1 RND
Spark Plug	-2750K	82.60

Glow Plug Socket Set

GPS060

A comprehensive set of quality glow plug sockets with universal joints for use in awkward areas. Made from satin finished chrome vanadium with a neoprene insert to grip and protect the plug.

Contents: 8, 9, 10, 12, 14 and 16mm.

**6
PIECES**




Product Number	Number of Pieces	Order Code KEN-503	Price/1 RND
GPS060	6	-1740K	512.60

Professional Glow Plug Connector Pliers

Suitable for the removal of hard to reach glow plug connectors found on the latest generation of engines. Made from chrome vanadium steel. Composite handle provides added comfort and control.

Blade length: 125mm.

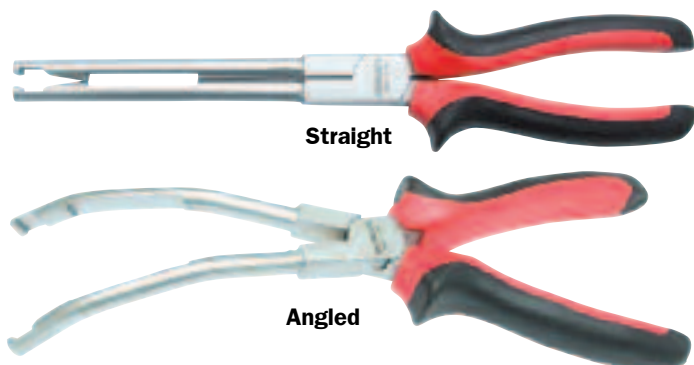


Jaw Type	Order Code KEN-503	Price/1 RND
Straight	-1240K	284.50
Angled	-1260K	307.30



Oxygen 'EGO', 'O2', 'Lambda' Sensor Socket Set

Three piece universal set. Essential for servicing today's computer-controlled vehicle systems. Easily removes exhaust gas oxygen sensors (known as 'EGO', 'O2' or 'Lambda' sensors), vacuum switches and pressure switches. Also suitable for diesel injectors found on Mitsubishi, Nissan, Opel, Vauxhall and VW vehicles. Made from heat treated cast steel.



**3
PIECES**

Set contains:

22mm (7/8") hex, 1/2" square drive socket with 7.5mm side slot for sensor wire clearance. Socket has 22mm hex for use with a spanner. **Overall length:** 80mm.
22mm (7/8") hex, crow's foot style wrench, 1/2" square drive (double square for easy access). With full length 11mm slot for total clearance of switch/sensor wire.
22mm (7/8") hex, crow's foot style wrench, 3/8" square drive. With full length 8.6mm slot for total clearance of switch/sensor wire.

Description	Order Code KEN-503	Price/1 RND
Sensor Socket Set	-8020K	420.40

Rear Axle Bush Installation Tool

For the in-situ installation of the rear axle mounting bushes on selected VW and Audi vehicles such as Audi A3, VW Bora and Golf IV.




Product	Order Code KEN-503	Price/1 RND
Rear Axle Bush Tool	-1550K	1139.70

Mondeo Sub-Frame Bush Installation & Removal Tool

For the removal/installation of rear sub-frame bushes in the Ford Mondeo. Can be used in situ, no need to remove sub-frame from vehicle.

Applications: Ford Mondeo 2001, 10/2000 onwards.

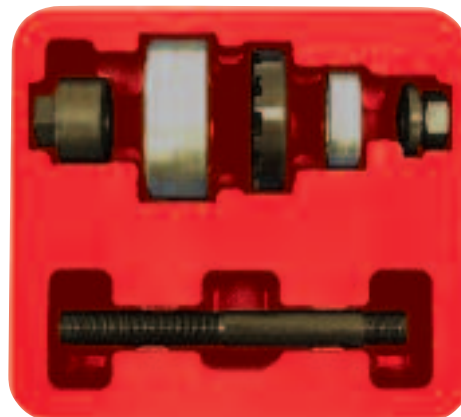

Product	Order Code KEN-503	Price/1 RND
Sub-Frame Bush Tool	-1540K	1367.70

Oxygen Sensor Socket

1/2" square drive. 22mm hex. x 90mm length. Cutaway section allows socket to pass over wiring.



Type	Order Code KEN-503	Price/1 RND
Oxygen Sensor Socket	-2760K	145.50

Viscous Hub Spanners

For the removal of thermal viscous fan hubs. Suitable for most makes of car.



Size (mm)	Weight each	Order Code KEN-503	Price/1 RND
32	325g	-1850K	112.20
36	315g	-1860K	112.20

Diesel Injection Pump Puller

For the removal of diesel injection pumps from the following engines:



DPP010



DPP020



DPP030



Product Number	Suitable for the following engines	Order Code KEN-503	Price/1 RND
DPP010	Landrover Freelander (Td4) & Rover 75 2.0d (M47R)	-1620K	340.60
DPP020	BMW M47/57 Engines	-1630K	410.00
DDP030	2.5TDS (BMW, Landrover, Vauxhall, OPEL)	-1640K	268.50

Diesel Injector Removal Set Bosch/Delphi

Specifically designed for removing Delphi/Bosch injectors using 5/8" slide hammer. Set of three adaptors and a special tool for removing the internal part of Bosch injectors which can be used with an air tool to loosen the injectors through vibration.

**4
PIECES**

NEW



Type	Order Code KEN-503	Price/1 RND
Diesel Injector Removal Set	-1820K	464.10

Diesel Injector Seat Cutter Set

Specifically designed for the cleaning and recutting of injector seats. For use with Bosch, Delphi, Iveco, Fiat and other universal applications.

Includes: five cutting reamers, pilot post, T-bar and a hexagon key.

**8
PIECES**

NEW



Type	Number of Pieces	Order Code KEN-503	Price/1 RND
Seat Cutter Set	8	-1830K	717.70

KENNEDY Radio Release Master Set

RRM046

Radio release master set contains a comprehensive set of high quality tools suitable for authorised release and removal of in-car entertainment units. These professional tools, have a chromed finish and are manufactured from heavy-gauge materials to ensure these tools will not distort in general use. Supplied in foam lined aluminium carry case.

Compatible with the following makes of in-car entertainment units: Audi, Becker, Becker from 2002, Blaupunkt, Blaupunkt from 2002, BMW, Clarion - New, Clarion - Old, Fiat Brava, Bravo & Marea, Grundig, JVC, Kenwood II to 2001, Kenwood III from 2002, Mercedes Benz, Opel, Opel-Inbus, Panasonic, Panasonic from 2006, Pioneer, Porsche, Skoda from 2002, Sony I to 2001, Sony II from 2002, VW.



**46
PIECES**

Product Number	Number of pieces	Order Code KEN-503	Price/1 RND
RRM046	46	-1560K	883.00

Magnetic Wing Cover

Designed to be used in the workshop to protect car wings when working. Manufactured from heavy duty vinyl with a soft backing to prevent any scratching or marking of paintwork when in use. The cover is held in place by magnets stitched into the material. Folds to a quarter of its length for storing.



Size (mm)	Weight each	Order Code KEN-503	Price/1 RND
1100 x 400	810g	-7800K	741.30

Anti-Freeze Tester

Suitable for use with Ethylene Glycol or Methanol type anti-freezes. Shows lowest temperature at which the cooling system is protected against freezing. Tough glass tube construction with an easy to read scale. For use on hot or cold engines.



Model Number	Weight each	Order Code KEN-503	Price/1 RND
AFT001	140g	-1100K	139.50

T-Handle Circlip® Tool

Fully adjustable internal and external Circlip® tool. Manufactured from hardened steel fitted with T-handle to give smooth precise control. Supplied with .090", .118", 0.150" and .170" interchangeable tips. 44 - 178mm capacity, ideal for use on commercial vehicles. **Overall length:** 310mm.




Overall Length	Order Code KEN-503	Price/1 RND
310mm	-4980K	1299.60

Spare Tips

Tip Size	Order Code KEN-567	Price/1 RND
0.090	-9100K	67.80
0.118	-9110K	67.80
0.150	-9120K	67.80
0.170	-9130K	67.80

Seal Puller Tool

Two size tips allow you to remove oil or grease seals from virtually anything including wheel bearings, transmission housings, etc. Hardened and tempered carbon steel shank and head with oxidised finish tips, chrome plated shank for protection against corrosion. Impact resistant square section handle for secure grip even when greasy. **Overall length:** 310mm (12¼").



Model Number	Weight each	Order Code KEN-503	Price/1 RND
SPT312	365g	-2900K	100.80

Exhaust Doughnut Puller

To enable fast Installation or removal of rubber anti-vibration mounting rings found on modern exhaust systems. Puller has offset hook for easier application and dipped vinyl handle for added comfort and extra grip. Manufactured from hardened steel. **Length:** 290mm.




Model Number	Weight each	Order Code KEN-503	Price/1 RND
EPD290	225g	-1600K	76.90

KENNEDY Heavy Duty Pry Bars

Manufactured from forged carbon heat treated steel with ground points. These traditional designs are ideal for use by tradesman in any industrial environment.

Rolling Head

Suitable for use in confined spaces.



Length x Width	Order Code KEN-505	Price/1 RND
150 x 10mm	-8400K	44.40
300 x 13mm	-8420K	119.20
450 x 16mm	-8440K	132.50

Line Type

Angled blade provides greater leverage.

Length x Section	Order Code KEN-505	Price/1 RND
400 x 16mm	-8520K	107.80
600 x 20mm	-8560K	287.00

Rolling Head Set

Number of Pieces	Contents	Order Code KEN-505	Price/1 RND
3	150mm Rolling head 300mm Rolling head 450mm Rolling head	-8780K	300.40

3
PIECES

Line Type Set

Number of Pieces	Contents	Order Code KEN-505	Price/1 RND
2	400mm Line Type 600mm Line Type	-8770K	439.70

2
PIECES

YAMOTO Chisel & Punch Set

14
PIECES

Chrome Vanadium Steel

Contents:

Pin punches: 3/16" x 6", 3/32" x 4 1/4", 1/8" x 4 3/4", 3/16" x 5 1/4" and 1/4" x 5 3/4".

Centre punches: 5/32" x 5".

Chisels: 1/2" x 6", 5/8" x 6 1/2", 3/4" x 7 1/2" and 7/8" x 8".

Taper punches: 3/16" x 10", 7/32" x 10", 5/16" x 10" and 3/8" x 10".



Number of Pieces	Contents	Order Code YMT-505	Price/1 RND
14	Chisels & Punches	-9010K	760.50

COLD CHISELS & PRY BARS

Plastic Handled Pry Bars

Made from square section chrome vanadium with ground points. Impact resistant plastic handles offer a more comfortable and secure grip to make these pry bars user friendly. Handles are oil and acid resistant.

Suitable for a wide range of general duty applications within the packing, automotive, maintenance and assembly industries.

Straight Blade

For general duty usage.



Blade Length x Width	Order Code KEN-505	Price/1 RND
300 x 10mm	-8300K	340.20
450 x 13mm	-8320K	520.90

Curved Blade

The curved blade provides greater leverage.

Blade Length x Width	Order Code KEN-505	Price/1 RND
300 x 10mm	-8340K	340.20
450 x 13mm	-8360K	520.90
600 x 13mm	-8380K	625.40

Sets

Number of Pieces	Contents	Order Code KEN-505	Price/1 RND
3	300mm Straight 300mm Curved 450mm Curved	-8330K	1196.60
2	450mm Curved 600mm Curved	-8390K	1141.10

Spot Weld Chisel & Bar

The Right Angled Seam Chisel and L Bar has been specially designed by Kennedy Tools for the separation of hard to reach spot welds and bonded panels as well as coping with the many traditional uses for pry and wrecking bars.

Features & benefits

- Easily separates hard-to-reach spot welded or bonded panels.
- Sharpened on three edges, the sharp end allows for penetration between the panels and both side edges allow for side impact to drive the panels apart without damage.
- 90° end for use in hard-to-reach pinchweld areas.
- Made from a super tough alloy steel.
- Will save the technician up to 15 minutes per panel replacement.

The Right Angled Rascal Bar with three sharpened edges is designed to allow two-directional hammer use on quarter panels, rockers and any other pinchweld. The chisel tip can be used for starting seam separation.



Description	Order Code KEN-505	Price/1 RND
Chisel & Bar	-1200K	61.80



Manufactured from high quality octagonal chrome vanadium steel with a ground cutting edge, in accordance with **BS 3066**.
For use on brickwork, masonry and cold metals.

Flat

Used for cutting and chipping cold metals and brickwork.

Flat Chisel Set



Number of Pieces	Contents (mm)	Order Code KEN-505	Price/1 RND
3	6 x 150, 12 x 200 & 18 x 255	-7150K	236.70
3	12 x 150, 18 x 200 & 25 x 255	-7160K	315.80

Brick Bolster - Chrome Vanadium

Used for splitting bricks.



Width x Length (mm)	Octagon (mm)	Order Code KEN-505	Price/1 RND
75 x 240	22	-7030K	174.50
100 x 240	22	-7040K	206.80

Flooring - Chrome Vanadium

Used for prising floorboards and cutting part of the board prior to lifting.



Width x Length (mm)	Octagon (mm)	Order Code KEN-505	Price/1 RND
56 x 230	16	-7120K	134.40

Pitching - Chrome Vanadium

For removing excess stone and facing, bevelled on one side.



Width x Length (mm)	Octagon (mm)	Order Code KEN-505	Price/1 RND
50 x 212	18	-6920K	278.30
62 x 212	22	-6930K	377.80

Width x Length (mm)	Octagon (mm)	Order Code KEN-505	Price/1 RND
6 x 100	6	-1600K	53.40
6 x 150	6	-1620K	56.00
9 x 125	9	-2410K	58.70
9 x 150	9	-2460K	60.10
12 x 150	9	-3220K	59.30
12 x 200	9	-3240K	62.30
12 x 255	9	-3260K	66.60
12 x 305	9	-3280K	71.20
16 x 150	12	-4020K	72.40
16 x 200	12	-4040K	78.70
18 x 200	16	-4840K	101.40
18 x 230	16	-4850K	104.10
18 x 255	16	-4860K	110.30
18 x 305	16	-4870K	119.00
18 x 455	16	-4890K	153.00
25 x 200	22	-6440K	135.40
25 x 230	22	-6450K	143.40
25 x 255	22	-6460K	152.30
25 x 305	22	-6470K	163.60
25 x 355	22	-6480K	194.80
25 x 455	22	-6490K	212.80

Half Round - Chrome Vanadium

Used for channelling concrete floors.



Width x Length (mm)	Octagon (mm)	Order Code KEN-505	Price/1 RND
6 x 150	12	-6620K	86.70
18 x 200	18	-6640K	147.90

Cross Cut - Chrome Vanadium

Used for channelling brickwork.



Width x Length (mm)	Octagon (mm)	Order Code KEN-505	Price/1 RND
6 x 150	12	-6720K	92.70
9 x 200	18	-6740K	127.20

Diamond Point - Chrome Vanadium

Used for channelling brickwork.



Width x Length (mm)	Octagon (mm)	Order Code KEN-505	Price/1 RND
8 x 200	18	-6840K	147.90

Plugging - Chrome Vanadium

For removing cement mortar from between bricks.




Width x Length (mm)	Octagon (mm)	Order Code KEN-505	Price/1 RND
5 x 255	16	-7100K	144.30



Contractor Flat Cold Chisels

Manufactured from high quality octagonal chrome vanadium steel with a ground cutting edge, in accordance with **BS 3066**. For use on brickwork, masonry and cold metals.

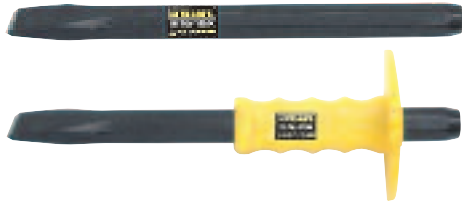

Width x Length (mm)	Octagon (mm)	Order Code SSF-505	Price/1 RND
12 x 200	11	-1060K	18.40
12 x 200 c/w guard		-1070K	34.70
18 x 200	16	-1100K	31.50
18 x 200 c/w guard		-1110K	47.70
18 x 255	16	-1120K	36.90
18 x 255 c/w guard		-1130K	53.10
25 x 200	22	-1160K	54.80
25 x 200 c/w guard		-1170K	71.00
25 x 255	22	-1180K	64.00
25 x 255 c/w guard		-1190K	80.70
25 x 305	22	-1200K	70.50
25 x 305 c/w guard		-1210K	86.70

Contractor Cross Cut Chisel

Chrome vanadium - used for channelling brickwork.



Width x Length (mm)	Octagon (mm)	Order Code SSF-505	Price/1 RND
6 x 150	12	-1260K	18.40

Contractor Brick Bolster Chisels

Chrome vanadium - used for splitting bricks.



Width x Length (mm)	Octagon (mm)	Order Code SSF-505	Price/1 RND
75 x 230	22	-1300K	86.70
75 x 230 c/w guard		-1310K	184.70
100 x 230	22	-1320K	114.30
100 x 230 c/w guard		-1330K	251.40

Contractor Electricians' Floor Chisels

Chrome vanadium - hardened and tempered cutting edge. For cutting the tongue in tongued and grooved floorboards.



Width x Length (mm)	Octagon (mm)	Order Code SSF-505	Price/1 RND
55 x 230	16	-1360K	82.30
55 x 230 c/w guard		-1370K	98.70

KENNEDY Wrecking & Pry Bars

Manufactured from heat treated carbon steel. Ideal for dismantling timber constructions, opening packing cases and removing nails (depending on the type of bar).

Chisel and V-Notch Wrecking Bar

For general dismantling and stripping applications, within a wide range of industries.



Length	Order Code KEN-505	Price/1 RND
450mm	-7180K	107.80
600mm	-7240K	143.40
750mm	-7300K	161.40

Chisel and Point Crowbar

For heavy duty work.



Length x Width	Order Code KEN-505	Price/1 RND
900 x 25mm	-7360K	232.70
1200 x 28mm	-7480K	392.60
1500 x 32mm	-7600K	569.10

Heel and Point Crowbar

For heavy duty dismantling.



Length x Width	Order Code KEN-505	Price/1 RND
900 x 25mm	-7690K	243.50
1200 x 25mm	-7720K	413.00
1500 x 32mm	-7750K	597.90

Protector Sleeves

Contoured high impact resistant plastic grips redirects the force of miss-hits safely away from your hands preventing injury. Suitable for use with octagonal cold chisels.



To Suit Octagon Size	Length (mm)	Order Code KEN-505	Price/1 RND
13mm	120	-9040K	94.30
16mm	120	-9050K	94.30
19mm	120	-9060K	94.30
22mm	120	-9070K	94.30

COLD CHISELS & PRY BARS

GROUP 505



Super Lever Pry Bars

Multi purpose. Can be used as a nail lifter, pry bar, adze or lever.



Length x Width	Order Code KEN-505	Price/1 RND
325 x 33mm	-8200K	94.70
375 x 33mm	-8250K	110.70

Combination Sets

Containing one wrecking bar and one pry bar.



Contents	Order Code KEN-505	Price/1 RND
450mm Wrecking Bar, 325mm Pry Bar	-8750K	200.30
600mm Wrecking Bar, 375mm Pry Bar	-8760K	228.00

Scutch Holders - Carbon Steel


Used for chasing out and general masonry work.



Width x Length (mm)	Octagon (mm)	Order Code KEN-505	Price/1 RND
25 x 200	18	-6860K	241.40
38 x 200	18	-6870K	268.80

Detachable Bit

For scutch chisels and hammers.

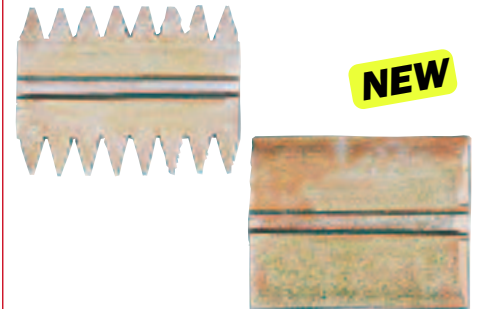

Comb Type	Width (mm)	Order Code KEN-505	Price/100 RND
Wide/Coarse	25	-9130K	682.80
	38	-9140K	1071.90
Plain/Drove	25	-9230K	682.80
	38	-9240K	1071.90

Girder Section Levels

Professional quality with three factory set vials, horizontal and two plumb, aluminium body with powder coat finish.

Accuracy: 0.75mm/m. Top face marked with metric and inch graduations. V-groove base for use on pipe work.



Length (mm)	Number of Vials	Weight each	Order Code KEN-510	Price/1 RND
300 (12")	2	235g	-1120K	133.80
400 (16")	3	295g	-1160K	154.60
600 (24")	3	440g	-1240K	162.60
900 (36")	3	600g	-1360K	171.80
1000 (40")	3	710g	-1400K	178.60
1200 (48")	3	850g	-1480K	410.00

Box Section Levels

Professional quality with three factory set vials, horizontal vertical and 45°. Aluminium body with one milled working face. Powder coat finish with plastic protective end caps and hanging hole.



Accuracy:
0.048° (0.75mm/m).

Overall Length (mm)	Number of Vials	Weight (each)	Order Code KEN-510	Price/1 RND
600 (24")	3	400g	-0240K	125.50
900 (36")	3	570g	-0360K	163.10
1000 (40")	3	645g	-0400K	177.00
1200 (48")	3	730g	-0480K	185.50
1800 (72")	3	1000g	-0720K	368.80

SENATOR ABS Plastic Girder Section Level

Manufactured from impact resistant ABS plastic. Three vials horizontal, vertical and 45°. Metric and Inch graduated face.

Accuracy: 1mm/1000mm.



Length (mm)	Number of Vials	Weight each	Order Code SEN-510	Price/1 RND
610 (24")	3	290g	-2240K	85.50

Torpedo Level

With magnetic base. Made from impact resistant ABS plastic. Three vials horizontal, vertical and 45°.

Accuracy: ±1.0mm/m.



Length	Weight each	Order Code SEN-510	Price/1 RND
230 (9")	140g	-2090K	22.90

Boat Levels

Construction Boat Level

Die-cast aluminium frame with a milled measuring face for accuracy. 1 vertical, 1 horizontal vial for normal and upside down measuring. A very popular level with scaffolders. Includes leather belt pouch.

Accuracy: 1.0mm/m.



Base Type	Length (mm)	Weight each	Order Code KEN-510	Price/1 RND
Non-magnetic	250 (10")	185g	-0100K	116.10
Magnetic	250 (10")	185g	-0160K	152.00

Torpedo Level

Professional - with two factory set horizontal and angled vials which are shockproof to a tolerance of 1mm/m. Die cast zinc body with enamelled finish. V-groove on base.



Length	Weight each	Order Code KEN-510	Price/1 RND
230mm/9"	140g	-0090K	113.90

Line Level

This durable line level is made hard wearing plastic. With reversed line hooks for a positive hold and a pocket clip. 13mm (1/2") wide.



Length	Weight each	Order Code KEN-510	Price/1 RND
75mm (3")	45g	-2400K	12.40

Bullseye Level

Made from tough hard wearing plastic. Can be free standing, or fixed onto a surface. The all purpose Bullseye circular level will show level of any surface in all directions at once.

Height: 16mm.



Base Dia.	Level Dia.	Order Code KEN-510	Price/1 RND
50mm	32mm	-2100K	12.40

Magnetic Post Levels

Made from hard wearing plastic this specialist level designed to ensure both square and round posts are upright prior to permanent fixing. The right angle plate has two horizontal vials and one vertical vial with flush magnets for metal posts and an integrated elastic fixing strap for other materials.

Accuracy: ±1.0mm/m.



Overall Size	Weight each	Order Code KEN-510	Price/1 RND
75 x 125mm	87g	-2800K	45.90
85 x 140mm	87g	-2820K	58.20



Extending Support Prop

This lightweight support prop is designed to give a helping hand when fixing overhead panelling and boarding. It has 125 x 80mm flat plates at both ends with a swivel ball joint for ease of use and to avoid damage to panel when pressure is applied. It has four pre-set adjustable height ranges: 1.16 to 2m, 1.46 to 2.3m, 1.76 to 2.6m, 2.06 to 2.9m.



Range	Order Code KEN-512	Price/1 RND
1.6 - 2.9m	-4000K	279.40



Plasterer's Hawk

With single screw fixing, zinc plated for corrosion protection. Heavy gauge sheet aluminium platform, highly polished, mirror finish. Suitable for DIY use.




Size (mm)	Weight per 10	Order Code SEN-512	Price/1 RND
265 x 265	6.20kg	-0920K	257.70

Plasterer's Trowel

Economy

Single tang, banana shaped handle with six concealed welded rivets to securely fix 'cross ground', hardened and tempered blade.

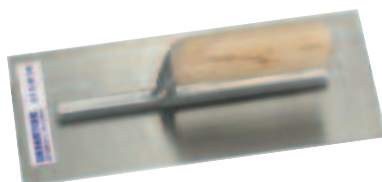

Size	Weight per 10	Order Code SEN-512	Price/1 RND
280mm (11")	4.60kg	-0100K	184.60



Paint & Plaster Mixer


Used for mixing plaster, concrete, filler, epoxy resin, emulsion paint and wallpaper paste. The stirring end should be fully immersed before the shaft is turned.

Light duty shaft
8mm hex.

Overall length:
400mm.

Heavy duty shaft
12mm hex.

Overall length:
600mm.



Shaft	Weight per 10	Order Code KEN-512	Price/1 RND
Light Duty	680g	-2780K	127.50
Heavy Duty	860g	-2800K	181.30



Plasterer's Hawk

Lightweight scoured aluminium blade to prevent plaster 'slip-off'. Detachable wooden handle with cushioned comfort ring. Designed to reduce discomfort during periods of extended use. Manufactured to the high standards expected by today's trade.



Size (mm)	Weight per 10	Order Code KEN-512	Price/1 RND
300 x 300	7.00kg	-0920K	678.00

Plasterer's Trowel

Aluminium shank single tang banana pattern. Six rivet construction 'cross ground' to prevent drag. For laying on and finishing plaster. Manufactured to the high standards expected by today's trade.



Size	Weight per 10	Order Code KEN-512	Price/1 RND
280mm (11")	4.00kg	-0100K	484.80



Wooden Skimming Float

Manufactured from selected timber. Ideal for producing a sandy surface finish when rendering plaster or concrete.



Size (mm)	Weight per 10	Order Code KEN-512	Price/1 RND
290 x 100	190g	-0950K	192.30

Adhesive Trowel

High quality moulded and contoured handle. Large base with two coarse pitched edges and two fine pitched edges. Suitable for use with all tile and carpet adhesives.



Size (mm)	Weight per 10	Order Code KEN-512	Price/1 RND
270 x 110	190g	-0400K	82.60



Plasterer's Bath

BM197

Manufactured from polyethylene, virtually unbreakable. Guaranteed not to rot, rust, crack or distort. Strong, light and easily carried.



Product Number	Capacity	Order Code KEN-512	Price/1 RND
BM197	165ltr	-3000K	678.10

SENATOR
QUALITY TOOLING

Builders'
Trowel



Ground polished, hardened and tempered high carbon steel alloy blades, tapered to remain rigid right to the tip with high angle handles for improved knuckle clearance and control. Chromed ferrules hold the forged tang firmly.

Broad Heel
Brick Trowel

11" heel width. London pattern, a smooth rounded end wooden handle with integral tang.



Overall Length	Type	Order Code SEN-512	Price/1 RND
280mm (11")	London	-0060K	136.10

Pointing Trowel

Ground polished, hardened and tempered high carbon steel alloy blade, high angle handle. Chromed ferrule holds the forged tang firmly. London pattern, a smooth rounded end wooden handle with integral tang.



Overall Length	Width (mm)	Order Code SEN-512	Price/1 RND
150mm (6")	75	-0020K	81.20

Gauging Trowel

London pattern, a smooth rounded end wooden handle with integral tang.



Overall Length	Width (mm)	Order Code SEN-512	Price/1 RND
180mm (7")	90	-0040K	89.00

KENNEDY
PROFESSIONAL

Professional
Brick Trowel



Manufactured from high carbon tempered and hardened steel with a ground and polished finish, tapered to remain rigid to the tip. Polished and varnished high angle handle, with chromed ferrule, holds the tang in place preventing the blade from twisting.



Overall Length	Width (mm)	Order Code KEN-512	Price/1 RND
280mm (11")	140	-0060K	356.90

Professional Pointing Trowel

Made from high carbon tempered and hardened steel with a ground and polished finish. Tapered to remain rigid to the tip. Polished and varnished high angle handles for greater balance, control and knuckle clearance, with chromed ferrule. Holds the forged steel tang in place preventing the blade from twisting.



Overall Length	Width (mm)	Order Code KEN-512	Price/1 RND
150mm (6")	75	-0020K	212.80

Gauging Trowel


London pattern, a smooth rounded end wooden handle with integral tang.



Overall Length	Width (mm)	Order Code KEN-512	Price/1 RND
180mm (7")	90	-0040K	232.90

KENNEDY **Double Ended
Brick Jointer**

Heavy duty steel. Used to produce 1/2" and 5/8" concave joints between bricks.

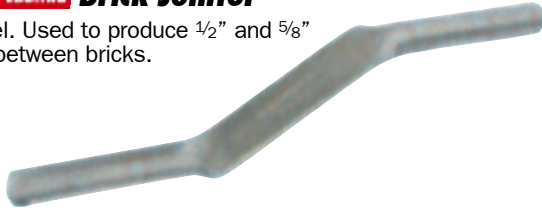

Overall Length	Order Code	Price/1 RND
580	-0440K	122.00

Brick Jointer

Suitable for half round finishing of the joints between bricks. London pattern smooth wooden handle with integral tang.



Size (mm)	Weight per 10	Order Code	Price/1 RND
150 x 12	1.50kg	-0420K	123.80

Plumb Bobs

Corrosive resistant epoxy coated with brass screw cap. For establishing vertical datum line without the use of a level.



Weight each	Order Code	Price/1 RND
5oz	-2050K	92.70
10oz	-2100K	76.30

Line Pins


Construction quality, hand, chrome plated line pins. Supplied in pairs. Use with Kennedy brick line to create a horizontal line for consistent bricklaying.



Size	Weight per 10	Order Code	Price/pr RND
150mm (6")	140g	-2160K	58.00

Brick Line

Construction quality, use with line pins and plumb bobs.

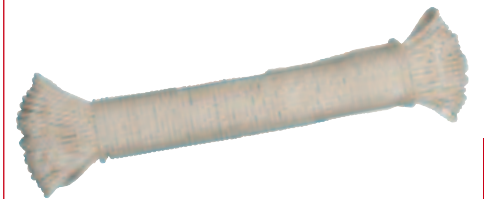

Size	Weight per 10	Order Code	Price/1 RND
18m (60')	740g	-2180K	29.20

RUTLAND **Flexible
Buckets**

Extremely versatile and virtually indestructible. It can be used for moving soil, garden waste, rubble and various other jobs around a garden or building site. 460mm diameter.



Size	Weight each	Order Code	Price/1 RND
42ltr	200g	-4880K	113.20

KENNEDY **Builder's
Buckets**

Capacity: 13.5ltr (3gal.)
Plastic: medium 'V' lip.
Rubatype: Large 'V' lip.
All rubber.



Type	Weight each	Order Code	Price/1 RND
Plastic	0.55kg	-8030K	68.80
Rubatype	2.10kg	-8130K	133.80

KENNEDY **15ltr Invincible Yellow
Builders' Bucket**

15ltr (3 gal.) filling scale inside. Five year guarantee.



Capacity	Order Code	Price/1 RND
15ltr	-8300K	91.30

SITESAFE **Builder's
Flexible Bucket**

Extremely versatile and virtually indestructible. It can be used for mixing plaster or cement, moving rubble and various other jobs around a building site.



Size	Order Code	Price/1 RND
Yellow Buckets		
26ltr	-2980K	105.10
40ltr	-3000K	135.50
75ltr	-3040K	286.50
Blue Buckets		
26ltr	-3080K	108.60
42ltr	-3100K	139.60



GROUP 515 CRIMPING TOOLS

KENNEDY Multi-Purpose Crimping Plier Kit

Made from heavy gauge carbon steel heat treated to HRA 65/70. Chemically blackened with cushion grip handles for operator comfort. Kit comes complete with 100 assorted insulated and non-insulated terminals in a neat plastic see through box.

Strip range: 0.75 - 6.

Crimp/cut capacity: 1.5 - 16mm.

**100
PIECES**



Description	Order Code KEN-515	Price/1 RND
Plier only	-5050K	105.00
100 Piece Kit	-5090K	289.90

5-Way Stripping & Crimping Kit

240mm heavy gauge hardened carbon steel wire crimper with anvil action cutters and PVC grip.

Insulation terminals: 1.5mm² (red), 2.5mm² (blue) and 6.0mm² (yellow).

Wire cutters: M2.6, M3.0, M3.5, M4.0 and M5.0mm.

Non insulated terminals: 1.5mm², 2.5mm² 4.0 - 6.0mm².

Wire strippers: 0.75, 1.0, 1.5, 2.5, 4.0 and 6.0mm².

Kit Contents: 40mm 5-Way Crimping Tool.

Blade connectors: red - 2.3 x 10.4mm, blue - 2.8 x 9.0mm.

Push-on spade connectors - male: red - 6.3 x 0.8mm, blue - 6.3 x 0.8mm.

Push-on spade connectors - female: red - 6.3 x 0.8mm, blue - 6.3 x 0.8mm.

Butt connectors: red - 0.5 x 1.5mm², blue - 1.5 x 2.5mm².

Bullet connectors - male: red - 4.0mm², blue - 4.0mm².

Bullet connectors - female: red - 4.0mm, blue - 4.0mm.

Fork connectors: red - 4.0mm, blue - 4.0mm, yellow - 4.0mm.

Ring connectors: red - 4.0mm, blue - 4.0mm, yellow - 6.0mm.

Description	Order Code KEN-515	Price/1 RND
361 Piece Ratchet Crimping Kit	-5530K	489.00



**361
PIECES**

Heavy Duty Ratchet Crimping Tool Kit

Heavy duty 220mm ratchet crimper with a selection of pre-insulated red, blue and yellow electrical connector terminals, cable ties and insulation tape. Ratchet crimper has laminated steel jaws with strengthened PVC handle grips.

Suitable for crimping insulated terminals as follows: red channel: 0.5 - 1.00mm², blue channel: 1.5 - 2.5mm², yellow channel: 4.0 - 6.0mm².

Supplied in a fitted case with slide locking clips and handle.

Kit contents: Heavy duty ratchet crimper, black insulation tape (19mm x 9m), black cable ties (2.5 x 100mm).

Ring connectors: red - 3.7, 4, 5mm, blue - 3.7, 4, 5, 6mm, yellow - 4, 5mm.

Butt connectors: red - 1.5 x 1.5mm², blue - 1.5 x 2.5mm².

Push-on spade connectors - male: red, blue, yellow - 6.3 x 0.8mm.

Push-on spade connectors - female: red, blue, yellow - 6.3 x 0.8mm.

Push-on spade covered connectors - female: red, blue - 6.3 x 0.8mm.

Push-on piggy back connectors - female: red, blue - 6.3 x 0.8mm.

Bullet connectors - male: red, blue - 4mm.

Bullet connectors - female: red, blue - 4mm.

Description	Order Code KEN-515	Price/1 RND
552 Piece Ratchet Crimping Kit	-5540K	1304.00



**552
PIECES**

Terminals - Rings/Forks

Red ring 4BA, 2BA and 1/4.

Blue ring 2BA, 1/4 and 5/16.

Yellow ring 1/4, 5/16 and 3/8.

Spade blue, red and yellow.

Average quantity:

300 pieces.



Type	Average Quantity	Weight each	Order Code KEN-515	Price/1 RND
Terminals	300	0.60kg	-5620K	262.90

Terminals - Spades/Bullets/Butt Connectors

Contents:

Butt connectors:

red, blue and yellow.

Spade connectors

(push-on female):

6.3mm - red, blue

and yellow.

Female bullet connectors:

4mm - red, and blue.

Male bullet connectors:


4mm - red and blue.



Type	Average Quantity	Weight each	Order Code KEN-515	Price/1 RND
Terminals	240	0.40kg	-5610K	271.10

KENNEDY
QUALITY THROUGH EXCELLENCE**Standard Industrial
Terminals**


Durable low cost copper or brass connectors. Manufactured as single piece connectors. Electro tinned to protect from corrosion. Insulated with flared entry, colour coded vinyl sleeves. All disconnect terminals supplied with anti-vibration copper sleeve.

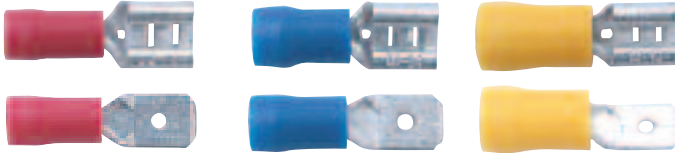Push-on Female and Male Tab Connector Terminals
Pack quantity: 100.

Type	Colour	Tab Size (mm)	Order Code KEN-515	Price/Pk RND
Push-on	Red	6.3 x 0.8	-3000K	86.40
Push-on	Blue	6.3 x 0.8	-3010K	95.70
Push-on	Yellow	6.3 x 0.8	-3020K	146.40
Tab	Red	6.3 x 0.8	-3700K	86.40
Tab	Blue	6.3 x 0.8	-3710K	86.40
Tab	Yellow	6.3 x 0.8	-3720K	137.00

Push-on Fully Insulated Female Connector Terminals
Pack quantity: 100.

Type (Female)	Colour	Tab Size (mm)	Order Code KEN-515	Price/Pk RND
Push-on	Red	6.3	-1520K	240.00
Push-on	Blue	6.3	-1500K	228.80
Push-on	Yellow	6.3	-1540K	248.20

Push-on Piggy Back Terminals
Pack quantity: 100.

Type (Female)	Colour	Tab Size (mm)	Order Code KEN-515	Price/Pk RND
Push-on	Red	6.3	-3730K	240.00
Push-on	Blue	6.3	-3740K	228.80

Heat Shrink Tubing Kits


Suitable for connecting, end handling, electric wire insulating and harnessing, corrosion proofing metal rods and tubes, antenna protection. Made from halogen-free environmentally friendly polyolefin which is flame retardant and RoHS compliant. It's operating temperature is from 55°C to 125°C and shrinking starts at 70°C and becomes totally shrunk at 110°C. It's shrink ratio is 2:1 and has a maximum electrical rating of 600V. Assorted colours. For use with heat guns and gas torches.



Number of Pieces	Tube Dia. (mm)	Order Code KEN-515	Price/Pk RND
32	4.8 (16), 6.4 (12), 9.5 (4)	-6800K	89.80
171	2 - 18 (Assorted)	-6900K	180.80
181	2 - 9 (Assorted)	-6910K	322.80

Blade Connector Terminals
Pack quantity: 100.

Type	Colour	Size (mm) Dia. x L	Order Code KEN-515	Price/Pk RND
Blade	Red	2.3 x 10.4	-2000K	72.80
		1.9 x 18.4	-2010K	78.50
Blade	Blue	2.8 x 9.0	-2050K	89.40
		2.3 x 18.4	-2060K	87.90
Blade	Yellow	2.8 x 10.0	-2100K	152.90

Fork and Ring Connector Terminals
Pack quantity: 100.

Type	Colour	Tab Size (mm)	Order Code KEN-515	Price/Pk RND
Fork	Red	3.2	-2200K	57.90
		3.5	-2210K	57.90
		4.0	-2220K	57.90
		5.0	-2230K	57.90
		6.0	-2240K	79.10
Fork	Blue	3.2	-2260K	63.40
		3.5	-2270K	63.40
		4.0	-2280K	63.40
		5.0	-2290K	63.40
		6.0	-2300K	84.00
Fork	Yellow	3.0	-2320K	95.70
		4.0	-2330K	95.70
		5.0	-2340K	95.70
		6.0	-2350K	140.20
Ring	Red	3.0	-2400K	52.30
		3.7	-2410K	52.30
		4.0	-2420K	57.90
		5.0	-2430K	57.90
		6.0	-2440K	79.10
		8.0	-2450K	79.10
		10.0	-2460K	111.60
		3.0	-2500K	63.40
		3.7	-2510K	63.40
		4.0	-2520K	63.40
Ring	Blue	5.0	-2530K	63.40
		6.0	-2540K	84.00
		8.0	-2550K	87.20
		10.0	-2560K	111.60
		12.0	-2570K	197.90
		3.0	-2600K	95.70
		4.0	-2620K	95.70
		5.0	-2630K	105.30
		6.0	-2640K	140.20
		8.0	-2650K	147.10
Ring	Yellow	10.0	-2660K	147.10
		12.0	-2670K	203.40

Butt Connector Terminals
Pack quantity: 100.

Type	Colour	Pack Quantity	Order Code KEN-515	Price/Pk RND
Butt	Red	100	-2900K	86.40
Butt	Blue	100	-2910K	86.40
Butt	Yellow	100	-2920K	137.00

Female Socket and Male Bullet Connector Terminals
Pack quantity: 100.

Type	Colour	Bullet Dia. (mm)	Order Code KEN-515	Price/Pk RND
Socket	Red	4.0	-3100K	115.60
		4.0	-3110K	122.00
Socket	Blue	5.0	-3120K	122.00
Socket	Yellow	5.0	-3130K	175.70
Bullet	Red	4.0	-3500K	89.50
		4.0	-3510K	95.70
Bullet	Blue	5.0	-3520K	95.70
Bullet	Yellow	5.0	-3530K	165.40

GROUP 515 CRIMPING TOOLS

KENNEDY Ferrule Crimp Tool


Ferrule crimp tool with full cycle ratcheting crimp frame and adjustable crimp pressure. Carbon steel jaws with a chemically blacked finish and PVC handles.

Model TCF 004

Capacity: 0.5, 0.75, 1.0, 1.5, 2.5 and 4mm². AWG 20, 18, 17, 16, 13 and 11.

Model TCF 016

Capacity: 6, 10 and 16mm². AWG 10, 8 and 6.

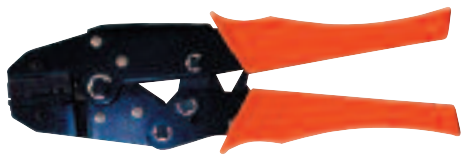

Model Number	Order Code KEN-515	Price/1 RND
TCF004	-5200K	479.20
TCF016	-5210K	540.80
Replacement Jaws (TCF004)	-6200K	272.50
Replacement Jaws (TCF016)	-6300K	237.00

Uninsulated Terminal Crimp Tool

Model TCU 006

Uninsulated terminal crimp tool with full cycle ratcheting crimp frame and adjustable crimp pressure. Carbon steel jaws with a chemically blacked finish and PVC handles.

Tab width: 6.3mm.

Capacity: 0.5 - 1.0, 1.0 - 2.5 and 4.0 - 6.0mm².




Model Number	Order Code KEN-515	Price/1 RND
TCU006	-5400K	676.50
Replacement Jaws	-6400K	257.30

Crimp Tool Kit

Model TCK 005


Crimp tool kit with full cycle ratcheting crimp and adjustable crimp pressure frame. Five pairs of interchangeable hardened and tempered carbon steel jaws with a chemically blacked finish for terminals, connectors, ferrules and end sleeves. Supplied in a robust plastic carry case.

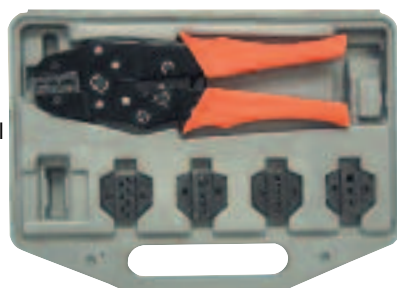

Product Number	Order Code KEN-515	Price/1 RND
TCK 005	-5500K	1477.80

Replacement Jaws To suit Kennedy ratcheting frame crimping tools.

Crimp Type	Order Code KEN-515	Price/1 RND
Ferrule Terminals 0.5mm ² - 4mm ²	-6200K	272.50
Insulated Terminals 0.5mm ² - 6.0mm ²	-6220K	272.50
Ferrule Terminals 6mm ² - 16mm ²	-6300K	237.00
Uninsulated Terminals 0.5mm ² - 6.0mm ²	-6400K	257.30
Uninsulated Terminals 1.5mm ² - 10.0mm ²	-6500K	290.70



Insulated Terminal Crimp Tool

Model TCI 006


Insulated terminal crimp tool, with full cycle ratcheting crimp frame and colour coded jaws, with adjustable and preset crimp pressure for accurate crimping. Carbon steel, hardened and tempered jaws with a chemically blacked finish and PVC handles.

Capacity:

Red: 0.5 - 1.5mm², AWG 20 - 16.

Blue: 2.5mm², AWG 14.

Yellow: 4.0 - 6.0mm², AWG 12 - 10.



Model Number	Order Code KEN-515	Price/1 RND
TCI006	-5220K	596.60
Replacement Jaws	-6220K	272.50


Uninsulated Terminal Crimp Tool

Model TCU 016

Uninsulated terminal crimp tool with full cycle ratcheting crimp frame and adjustable crimp pressure. Carbon steel jaws with a chemically blacked finish and PVC handles.

Capacity: DIN 1 - 2, 6, 10 and 16mm².

AWG 14, 10, 8 and 6.



Model Number	Order Code KEN-515	Price/1 RND
TCU016	-5420K	743.70
Replacement Jaws	-6420K	411.90

Coaxial Crimp Tool

Model TCC 008

Coaxial crimp tool with full cycle ratcheting crimp frame and adjustable crimp pressure. Carbon steel jaws with a chemically blacked finish and PVC handles.

Suitable for RG cable: 6, 58, 59 and 62.

Hexagonal crimp of 1.72, 2.5, 5.4, 6.48 and 8.22mm.



Model Number	Order Code KEN-515	Price/1 RND
TCC008	-5340K	506.10
Replacement Jaws	-6340K	237.00

Modular Plug Crimp Tool

Model MCT 008

Modular plug crimping tool complete with wire cutting and stripping facilities. Manufactured from hardened and tempered carbon steel with chemically blacked finished and tempered jaws with PVC handles.

Capacity: 8P8C/RJ-45, 6P/RJ-12, RJ-11 and 6P2C.




Model Number	Order Code KEN-515	Price/1 RND
TMCT008	-5460K	460.50

Heavy Duty Crimp Tool

Model TCU 095

Heavy duty crimp tool for uninsulated terminals. Tool steel jaws and manufactured from ductile iron.

Capacity: cable lugs: 10mm² - 95mm². Aluminium AWG to 4/0. Copper 8WG to 250 MCM.



Model Number	Order Code KEN-515	Price/1 RND
TCU095	-5440K	2009.10
Replacement Jaws	-6440K	589.70


KENNEDY
QUALITY THROUGH INNOVATION

Cable Tie Gun



Steel jaws grip the cable with trigger action for rapid tightening, tensioning and trimming, ideal for production environments.

Capacity:
2.4 to 4.8mm width.

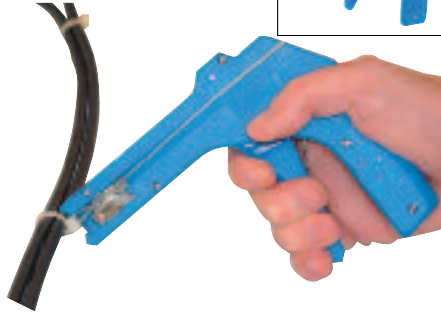

Capacity (mm)	Order Code	Price/1 RND
2.4 - 4.8	KEN-516 -8400K	309.10

Mains Testers

With heavy duty one-piece moulded insulation sheaths covering both blade and transparent plastic handle for extra protection and safety. Will detect 'live' electricity supply. Suitable for AC to 125 - 250V. 3mm wide tip. Conforms to **VDE 0630 Part 4**.



Blade Length	Cap Type	Weight per 12	Order Code	Price/1 RND
150mm	Plastic	210g	KEN-515 -0500K	19.30
190mm	Plastic	400g	-0550K	28.80

Wall Socket & Extension Tester

Fits into a three pin socket. Indicates correct, no neutral, L and E reversed, L and N reversed and no earth wiring.



Voltage	Order Code	Price/1 RND
240V	KEN-515 -1000K	356.60

KENNEDY
QUALITY THROUGH INNOVATION

Magnetic Cable Guider

An innovative tool for inserting cables through brick walls, cavity walls, studwork etc. Tested by major utilities - saves hours of engineers time. Includes three adaptors for 3.7 to 5.9mm cable diameters. Drill bit not included.



Push through cable guider

Attach to guider and pull back through



**NOT FOR USE
WITH LIVE CABLES!**




Type	Order Code	Price/1 RND
Cable Guider	KEN-516 -9600K	300.80
Caps (Pk 6)	-9620K	120.30

EDISON

Cable Ties



Suitable for securing or retaining cables and objects of various shapes and sizes. Tensile strengths of 8 to 22kg. Heat resistant from 40°C to 85°C. Supplied in pack of 100.



**1001
USES IN THE
WORKSHOP
OFFICE
GARDEN
and HOME**



Assorted Cable Tie Sets

Contains 100 of each size:
2.5 x 100mm and 160mm,
3.5 x 200mm and 300mm,
4.8 x 200mm and 300mm.



**600
PIECES**

Colour	Weight	Order Code	Price/1 RND
Black	645g	EDI-515 -3000K	209.10
Natural	645g	-3010K	310.80

Cable Tie Sets

Contents comprise of one width x two lengths:
2.5mm - 100mm and 160mm,
3.5mm - 200mm and 300mm,
4.8mm - 200mm and 300mm.


Width	Colour	Pk Qty	Order Code	Price/1 RND
2.5mm	Black	300	EDI-515 -3040K	76.10
2.5mm	Natural	300	-3050K	76.10
3.5mm	Black	400	-3060K	292.40
3.5mm	Natural	400	-3070K	292.40
4.8mm	Black	500	-3080K	473.50
4.8mm	Natural	500	-3090K	473.50

PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR

GROUP 516 CABLE & WIRE STRIPPING TOOLS

KENNEDY No.500 Cable Stripper/ Screwdriver/Volt Tester

The newly developed Multi-Stripper PLUS, screwdriver, voltage tester, stripper for conductors, round and coaxial cables and cutter in only one tool. **Screwdriver:** two double ended bits: No.1PZ and 8855; x 3.5 slotted No.2PZ and 8855: x 4.0 slotted bit storage inside ergonomic dual material handle. **Voltage tester:** 110 - 250V. **Round cable stripper:** capacity 8 - 13mm dia (eg NYM 3x 1.5mm - 5x 2.5mm). **Built-in side cutter:** for PVC-isolated round cables max. 9mm dia. **Coax stripper:** two or three-level stripping of all common coaxial cables of 4.8 - 7.5mm dia. **Wire stripper:** for all common stranded and solid conductors 0.5mm (20AWG) to 6.0mm (10AWG).



Capacity (mm)	Order Code KEN-516	Price/1 RND
8.0 - 13.0	-8340K	1156.50

Cable Strippers

Durable plastic bodies with hardened and ground sharpened steel blades with precise depth of cut adjustment. Spring loaded safety cover, covers the blade when not in use. For standard and solid conductors. Hardened steel blades.

CS16

For stripping of all common round cables of 4 - 28mm. Wire stripper adjusts automatically to diameter of wire to allow quick and accurate stripping. Stripping blades are made from hardened steel.

Overall length: 125mm.



CS27

For stripping of all common round cables of 4 - 28mm. Wire stripper adjusts automatically to diameter of wire to allow quick and accurate stripping. Stripping blades are made from hardened steel.

Overall length: 130mm.



CS28

Complete with hook knife for splitting flat and ribbon cables along its length.

Overall length: 170mm.



Product Number	Capacity (mm ²)	Weight each	Order Code KEN-516	Price/1 RND
CS16	4.0 - 16.0		-7900K	181.70
CS27	8.0 - 27.0		-7910K	183.90
CS28	4.0 - 28.0		-7920K	198.10
Spares to suit CS16, CS27 & CS28		125g	-7950K	47.40

Cable Stripping Knife

Steel blade and cushioned handle, used for stripping cable and wire.

Overall length: 150mm.



Length	Order Code KEN-516	Price/1 RND
150mm	-7500K	115.20

Multi-Stripper PLUS

Cable stripper for round and continental type cables of 8 - 13mm dia (e.g. NYM 3x 1.5mm² up to 5x 2.5mm²).

Flush stripping even in hard-to-reach areas, e.g. ceiling and wall areas, junction and distribution boxes, switch cabinets, etc. The ergonomic tool design provides a sure grip and safe handling. Needs no adjustment of the cutting depth.



Capacity (mm)	Order Code KEN-516	Price/1 RND
0.5 - 6.0	-8300K	367.40

Wire Stripper & Cutter

Unique self-adjusting cutting action for rapid repeatable wire stripping. Hardened and tempered ground steel blades housed in durable plastic bodies contoured to fit comfortably into the hand for extended periods of use encountered in electrical assembly industries.

Mini-Duo Wire Stripper & Cutter

Fully insulated wire stripper for all common stranded and solid conductors of 0.5 - 6.0mm². Adjusts automatically to diameter of wire. Blades are made from hardened steel.

Overall length: 155mm.



Capacity (mm ²)	Order Code KEN-516	Price/1 RND
0.5 - 6.0	-7980K	439.40

Super Wire Stripper & Cutter

Fully insulated for all stranded and solid conductors from 0.2 to 6mm². Automatically adjusts to the diameter of wire. Reinforced polyimide construction.

Overall length: 195mm.



Capacity (mm ²)	Order Code KEN-516	Price/1 RND
0.2 - 6.0	-7970K	465.00

Co-axial Cable Cutter

Two preset pairs of blades, one for outer sheathing, one for dielectric. For cable diameter range of 4.8 - 7.5mm². Also strips flexible cables of 3 x 0.75mm², 10mm² and 16mm². **Overall length:** 110mm.



Capacity (mm ²)	Order Code KEN-516	Price/1 RND
4.8 - 7.5	-7960K	298.70

KENNEDY
QUALITY THROUGH INNOVATION**Cable Stripper & Ripper****MK02**

For stripping of outer insulation from cables. Spring loaded gripping arm, blade has adjustable cutting depth of up to 3mm. Blade can be turned through 90° by pushing the side button, to cut along the length of cable. Also features a spring loaded ripping blade for insulation removal.

Overall length: 138mm.



Capacity (mm ²)	Order Code KEN-516	Price/1 RND
4.5 - 28.0	-8040K	970.00
5 Spare Blades	-8030K	605.20

Wire Stripper, Cutter & Crimper**Duo Crimp**

Combined stripping and crimping tool. Stripping tool adjusts automatically to the diameter of the wire.

Wire diameter range: 0.5 - 6.0mm². Two crimping ranges are available 0.5 - 1.5mm² and 2.5 - 6.0mm².

Complete with side wire cutter.

Overall length: 155mm.



Capacity (mm ²)	Weight each	Order Code KEN-516	Price/1 RND
0.5 - 6.0	150g	-8520K	1167.10

Electricians' Shears

For use on soft cable up to 22mm² diameter, can also be used for stripping, cutting insulation materials, electrical tape and cable ties. Stainless steel blades with hardened edge with vanadium and molybdenum for long lasting edge. HRC58-60 with one cutting edge serrated to reduce slipping and notched blade for tough and large diameter cuts. Tough, lightweight nylon handles. Supplied with handy clip-on belt pouch.

Cutting length: 45mm (1¾").



Length (mm)	Weight each	Order Code KEN-516	Price/1 RND
140	150g	-6400K	350.60

Powerstrip Wire Stripper

Self adjusting. Wire is gripped and stripped in a single action. Also features a wire cutter to allow for trimming. Adjustable slide and lock wire stop for fast accurate setting of strip length.



Overall length: 175mm.

Capacity (mm ²)	Order Code KEN-516	Price/1 RND
1.25 - 6.0	-8065K	528.10

SENATOR
QUALITY TOOLING**Automatic Wire Stripper**

For stripping single core wire up to 6mm diameter. Also with bypass action cutting blades for wire up to 6mm diameter.



Capacity (mm)	Order Code SEN-516	Price/1 RND
6.0	-8240K	133.20

KENNEDY
QUALITY THROUGH INNOVATION**Fibre Optic Cutter****FOC145**


Designed for cutting fibre optics, KEVLAR materials, plastic canvas, upholstery, headlines, cloth, fabric, string and many more. Lightweight and easy to use for both right and left handed users. Easy reach thumb lock. Long lasting precision ground hardened high carbon alloy steel with molybdenum and vanadium blades. Serrated blade reduces slippage.

Overall length:

145mm (5").

Cutting length:

32mm (1").

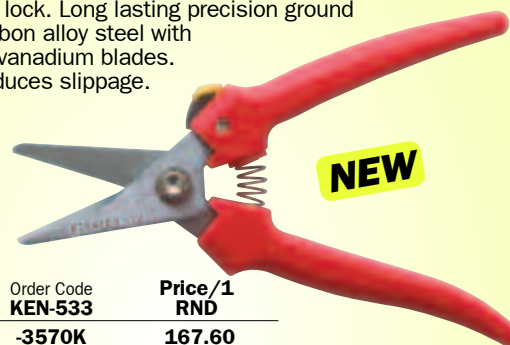

Overall Length	Weight each	Order Code KEN-533	Price/1 RND
145mm	82g	-3570K	167.60

Fibre Optic Shears - with Serrated Blade**FOC160**

Designed for cutting fibre optics, KEVLAR materials, plastic canvas, upholstery, headlines, cloth, fabric, string and many more. Lightweight and easy to use for both right and left handed users. Long lasting precision ground hardened high carbon alloy steel with Molybdenum and Vanadium blades. Serrated blade reduces slippage. Adjustable pivot point adjusts the tension between the blades. Extended tang for durability.

Overall length: 160mm

Cutting length: 42mm.



Overall Length	Weight each	Order Code KEN-533	Price/1 RND
160mm	82g	-3580K	163.10

GROUP 516 SOLDERING TOOLS

Butane soldering irons can be used anywhere, any time, without having to plug into the wall. They don't have power cables making them ideally suitable for fine work. The run time for the irons varies from 30 to 90 minutes, depending on model and heat setting, but refilling them with butane gas only takes about 20 seconds. They offer more flexibility than traditional soldering irons as you can change the size of the soldering tips, put hot blow air tips for heat-shrink work, put hot knife tips on for cutting plastic, and flame tips for brazing. The temperature can be controlled very easily for each application (580°C to 1,300°C) with the temperature adjustment dial. Butane soldering irons don't use an open flame, unless using the flame tip. There are small catalytic combustion screens built into the other tips, which heat up and glow so that soldering iron won't flame out.

KENNEDY Butane Soldering Tools


Flint type ignition which is built into the cap. Uses standard butane lighter fuel and is simple to refill. Fully adjustable tip temperature control with a safety fuel cut-off when cap is replaced. Textured anti-slip barrel. Supplied with pointed soldering tip. Can be used with double flat, hot air, flame and hot knife, can also be used as a blow torch. Supplied without fuel.

Power rating:	50W
Soldering temperature	375°C
Run time	60 minutes
Overall length with cap:	195mm
Overall length with soldering tip:	180mm.

Product Number	Weight each	Order Code KEN-516	Price/1 RND
BS050	100g	-9000K	271.00

Butane Soldering Iron Tips

Interchangeable tips for use with Kennedy butane soldering tools.



To Suit BS050 Soldering Iron

Type	Size (mm)	Order Code KEN-516	Price/1 RND
Double Flat Tip	2.4	-9050K	41.10
	4.8	-9040K	41.10
Fine Tip		-9060K	41.10
Hot Knife Tip		-9070K	41.20

Butane Soldering Tool Kit

Supplied in a robust plastic case with inlay.

Contents:

BS050 Butane soldering iron, tip cleaning sponge, stand, four interchangeable tips: 4.8mm and 3.0mm, double flat, hot knife.



Type	Weight each	Order Code KEN-516	Price/1 RND
6 Piece Soldering Kit		-9020K	466.20

SENATOR Butane Micro Soldering Tool

Cordless and refillable. Uses standard butane lighter fuel. 120W rating. Working temperature range up to 1,300°C. Lightweight, windproof flame, ideal for outdoors. Easily removed nozzle for cleaning or replacement. Can be used for shrinking heat seal plastic tubing. Light duty soldering. Craft projects. Thawing frozen locks. Includes one refillable fuel cartridge.



Weight each	Order Code SEN-516	Price/1 RND
105g	-2000K	121.30

KENNEDY Butane Soldering Tool

PIEZO self ignition. Uses standard butane lighter fuel and is simple to refill. Fully adjustable tip temperature control with a safety fuel cut-off when cap is replaced. Textured anti-slip barrel with built in stand for anti roll. Supplied with pointed soldering tip. Can be used with double flat, hot air, flame and hot knife, can also be used as a blow torch. Supplied without fuel.




Power rating:	50W
Soldering temperature	375°C
Run time	60 minutes
Overall length with cap:	195mm
Overall length with soldering tip:	180mm.

Product Number	Weight each	Order Code KEN-516	Price/1 RND
BS075	100g	-9100K	692.00

Butane Soldering Iron Tips

Interchangeable tips for use with Kennedy butane soldering tools.

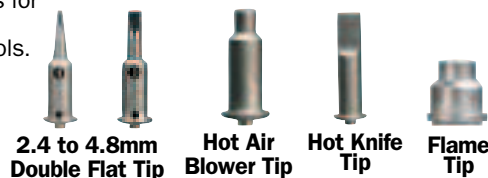

To Suit BS075 Soldering Iron

Type	Size (mm)	Order Code KEN-516	Price/1 RND
Double Flat Tip	2.4	-9140K	95.00
	3.2	-9150K	94.30
	4.8	-9160K	94.30
Hot Air Tip		-9170K	94.50
Flame Tip		-9180K	94.30
Hot Knife Tip		-9190K	94.30

Butane Soldering Tool Kit

Supplied in a robust plastic case.

Contents: BS075 butane soldering iron, tip cleaning sponge, eight interchangeable tips: 2.4mm single flat, 1, 2.4, 3.2, 4.8mm double flat, hot air blower, hot knife and hot air deflector.



Product Number	Weight each	Order Code KEN-516	Price/1 RND
75BW - 7 Piece Soldering Kit	280g	-9120K	1173.40

SENATOR
QUALITY TOOLING

Butane Soldering Torch

Flint type ignition which is built into the cap. Uses standard butane lighter fuel and is simple to refill. Fully adjustable tip temperature control. Supplied with pointed soldering tip and a stand with sponge. Supplied without fuel.



Power rating:	30W - 80W
Soldering temperature	400°C
Run time	45 minutes
Overall length with cap:	235mm
Overall length with soldering tip:	230mm.

Type	Weight each	Order Code SEN-516	Price/1 RND
Soldering Torch	105g	-2020K	152.20

4-In-1 Butane Torch Kit

This excellent soldering kit represents exceptional value for money and contains:
Butane soldering tool complete with 2.4mm soldering tip, hot knife tip, hot air tip and flame tip. Protective cap with pocket clip. Stand and sponge.

Applications:

soldering circuit boards, craft projects, thawing frozen locks, shrinking heat seal plastic tubing and cauterising rope. The needle and 2.4mm soldering tip must be used in conjunction with the interchangeable tip holder.



Type	Weight each	Order Code SEN-516	Price/1 RND
4-In-1 Soldering Kit	467g	-2040K	274.00

Spares for 4-In-1 Torch Kit

Product Number	Order Code SEN-516	Price/1 RND
Flame Tip	-2060K	21.90
Needle Soldering Tip	-2080K	72.10
2.4mm Soldering Tip	-2100K	7.30
Hot Blower Tip	-2120K	38.40
Hot Knife Tip	-2140K	38.40
Interchangeable Tip Holder	-2200K	38.40

KENNEDY
QUALITY TOOLING

Butane Soldering Tool

Piezo self ignition. Uses standard butane lighter fuel and is simple to refill. Fully adjustable tip temperature control with a safety fuel cut-off when cap is replaced. Textured anti-slip barrel with built-in stand for anti roll. Supplied with pointed soldering tip. Can be used with single flat, double flat, hot air, hot air deflector and hot knife, can also be used as a blow torch. Supplied without fuel.




Power rating:	25W - 125W
Soldering temperature	580°C
Run time	60 minutes
Overall length with cap:	235mm
Overall length with soldering tip:	230mm.

Product Number	Weight each	Order Code KEN-516	Price/1 RND
BS125	145g	-9300K	1067.10

Butane Soldering Iron Tips

Interchangeable tips for use with Kennedy butane soldering tools.

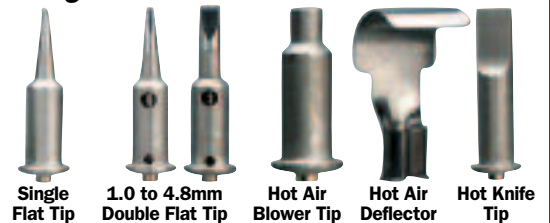

To Suit BS125 Soldering Iron

Type	Size (mm)	Order Code KEN-516	Price/1 RND
Single Flat Tip	2.4	-9340K	104.60
	1.0	-9350K	159.70
Double Flat Tip	2.4	-9360K	159.70
	3.2	-9370K	108.20
	4.8	-9380K	109.50
Hot Air Blower Tip		-9390K	104.80
Hot Air Deflector		-9400K	104.60
Hot Knife Tip		-9410K	104.60

Butane Soldering Tool Kit

BSK125

Butane soldering iron complete with 5 tip attachments, cleaning sponge and safety stand.

Kit contents: 1x butane soldering iron. 5x tip attachments: 2.4mm and 4.8mm double flat, hot knife, hot air blower and hot air deflector. 1x cleaning sponge, 1x safety stand.



Number of Pieces	Weight each	Order Code KEN-516	Price/1 RND
8	460g	-9320K	1428.90

GROUP 516 SOLDERING TOOLS

KENNEDY Soldering Irons

Thermo-plastic handles, designed for comfort and a firm safe grip. The mains lead is held by a cable clamping screw which eliminates the strain on electrical connections.

All supplied complete with a double flat nickel plated tip and 3A 3-pin plug with 1.5m power lead as standard. Manufactured to **BS 3456**. All 230V.

15W Fine Duty For light duty electrical repairs and fine electronics work.



25W General Duty An all-purpose soldering iron for general electrical repairs in the workshop.



40W Medium Duty Medium duty soldering iron for most general soldering where a little more power is required.



75W Heavy Duty Heavy duty soldering iron for metal repairs such as battery connections and other small metal joining tasks.



Power Rating	Tip Size (mm)	Duty	Overall Length	Weight each	Order Code KEN-516	Price/1 RND
15W	3.0 Straight	Fine	216mm	270g	-2150K	439.40
25W	3.0 Straight	General	216mm	270g	-2250K	424.80
40W	3.0 Offset	Medium	235mm	285g	-2400K	460.30
75W	6.0 Offset	Heavy	275mm	330g	-2750K	491.20

Replacement Tips - Double Flat

Tip Style	Tip Size	To Suit Iron	Weight per 10	Order Code SPR-567	Price/1 RND
Flat	3.0mm	15W, 25W	-	-3210K	42.00
Flat	3.0mm	40W	-	-3220K	44.30
Flat	6.0mm	75W	460g	-3230K	61.30
45° Offset	6.0mm	75W	460g	-3270K	57.00
45° Offset	6.0mm	40W	-	-3260K	61.30

Multi Angle Vice

Aluminium vice with a two position lockable ball joint, cast steel clamp and swivel mechanism. Horizontal/vertical grooved jaw is designed to hold irregular shaped objects. Removable jaw rubber covers for protecting delicate components. Will clamp to surfaces of 5 to 50mm thickness.

Jaw width: 74mm.

Upright: Rotates through 360° and the vice can swivel between 45° and 135°.

Right angles:

Vice can be rotated through 360°.



Jaw Capacity	Weight each	Order Code KEN-516	Price/1 RND
60mm	930g	-2000K	368.70

SENATOR Soldering Irons

Suitable for workshop and general electrical repair work.

Thermo-plastic handles are designed for comfort and a firm safe grip. The mains cable is held by a cable clamping screw which eliminates the strain on the electrical connections.

Supplied with a double flat nickel plated tip, 1.2m power lead and 3A three pin plug. Manufactured to **BS EN 60335-2-45**.

NEW



Wattage	Voltage	Order Code SEN-516	Price/1 RND
25W	230V	-2210K	91.80
40W	230V	-2240K	103.40

Desoldering Pump

Single handed use. Quickly removes molten solder from joints. Smooth action sprung loaded piston. Nozzle easily removed for cleaning. Temperature resistant, can be placed directly onto solder. Anti-static body ensures excellent component protection.



Size (W x H x D) mm	Weight each	Order Code SEN-516	Price/1 RND
60 x 240 x 25	50g	-2160K	67.70

KENNEDY Desoldering Tool

Anti-Static Val-U-Vac

With carbon impregnated tip and body to prevent solder adhesion and dispel static. Conforms with **CECC 15**. Removal of molten solder is achieved by the spring loaded piston creating a vacuum in the barrel of the tool. With safety shield and extraction springs located outside of the vacuum chamber and PTFE nozzle to prevent solder sticking.

Nozzle size: 3mm OD x 1.5mm, ID x 20mm.



Overall Size	Weight each	Order Code KEN-516	Price/1 RND
190 x 20mm	40g	-8480K	223.40

Professional Desoldering Tool

DSGPRM

Anodised aluminium body and steel plunger for professional use. With extraction spring located outside of the vacuum chamber and PTFE nozzle to prevent solder sticking. With safety shield.

Nozzle size: 3mm OD x 1.5mm, ID x 20mm long.



Size (mm)	Weight each	Order Code KEN-516	Price/1 RND
190 x 20	60g	-8500K	547.30
Spare Nozzles (Pk 5)		-8505K	416.70

Helping Hands

Ideal for precision soldering, wiring and model making applications. With 10 movable joints for universal adjustment. 50mm diameter x 2.5 magnification. Two spring loaded crocodile clips for holding objects up to 8mm thick. Solid cast iron base for stability. All other metal parts are chrome plated and corrosion-resistant.



Mag.	Mirror Size	Order Code KEN-516	Price/1 RND
2.5x	50mm Dia.	-1800K	121.70



EDISON Auto Range Digital Multimeters

Within the Edison™ range of multimeters you will find direct reading multimeters and non-contact reading multimeters. Ideal for electrical troubleshooting and straightforward environmental testing in residential and commercial environments.

DAM075

The 2 in 1 digital multimeter is capable for the following tasks: electrical testing using test probes, no contact voltage detection and testing for wiring faults.

Testing temperature: -20 to 1000°C.

AC voltage: 750V.

DC voltage: 1000V.

AC/DC current: 10A.

Resistance: 40MΩ.

Capacitance: 200μF.

Relative measurement function. Diode testing facility. Clear display with LED back light and data hold function. Auto power OFF and low power indicator.

Digital display count: 3999.

Pack includes: digital multimeter, test probes, temperature sensor probe, DC1.5V x3 AAA batteries (installed), instruction manual

Dimensions

(W x D x H): 152 x 45 x 190mm.



Model Number	Weight each	Order Code EDI-516	Price/1 RND
DAM075	416g	-3100K	1131.80

MET060

The 5 in 1 digital multimeter is capable of testing the following: electrical testing.

Temperature: -20 to 1000°C.

Humidity: 30 to 90%.

Sound level: 35 to 100db.

Illumination: 4000 to 40000Lux.

AC/DC voltage: 600V.

AC/DC current: 10A.

Resistance: 40MΩ.

Capacitance: 200μF.

Frequency: 1Hz to 200KHz.

Relative measurement function. Diode testing facility. Clear display with LED back light and data hold function.

Auto power OFF and low power indicator.

Digital display count: 3999.

Pack includes: environment digital multimeter, test probes, clamp-on test leads, temperature sensor probe, 9V battery (installed), instruction manual.

Dimensions

(W x D x H): 165 x 65 x 230mm.



Model Number	Weight each	Order Code EDI-516	Price/1 RND
MET060	618g	-3460K	1584.70

MNT070

The 3 in 1 digital multimeter is capable of testing the following: network cable testing, line testing (RJ11), DMM testing.

AC/DC voltage: 1000V.

AC/DC current: 10A.

Resistance: 200MΩ.

Relative measurement function. Diode testing facility. Clear display with LED back light and data hold function.

Pack includes: network digital multimeter, test probes, TJ45 jack (remote), 9V battery (installed), instruction manual.

Dimensions (W x D x H): 165 x 65 x 230mm.



Model Number	Weight each	Order Code EDI-516	Price/1 RND
MNT070	618g	-3600K	1697.90

DAM100

Auto Range Hi-Accuracy Digital Multimeter with USB interface, ideal for electrical troubleshooting and straightforward maintenance, initial start-up testing and R and D.

Linear frequency: 5Hz to 200KHz.

Logic frequency: 5Hz to 2MHz.

Duty cycle: 5% to 95%.

Diode testing: 0 to 2.5V.

AC/DC voltage: 1000V.

AC/DC current: 10A.

Resistance: 50MΩ.

Capacitance: 5000μF.

Relative measurement function. Clear display with LED back light and data hold function Auto power 'OFF' and low power indicator.

Digital display count: 50000.

Pack includes: digital multimeter, test probes, clamp-on test leads, USB interface connection, CD rom 'PC-LINK' software (compatible with Windows 98ME, 2000, NT or XP), 6x 1.5V AAA batteries (installed), instruction manual, protective case with carry strap.

PC-LINK software features: measure graph, measure data record, simulate LCD display, analogue dial plate display, measure max/min display, sampling interval, graph export, measure data save.

Dimensions (W x D x H):

178 x 65 x 255mm.



WITH PC LINK SOFTWARE



Model Number	Weight each	Order Code EDI-516	Price/1 RND
DAM100	1018g	-3420K	4527.90

DAM060

Auto Range Digital Multimeter with USB interface, ideal for electrical troubleshooting and straightforward maintenance, initial start-up testing and R and D.

Temperature testing (K Type): -5°C to 1000°C.

AC voltage: 700V.

DC voltage: 1000V.

AC/DC current: 10A.

Resistance: 60MΩ.

Capacitance: 300μF.

Frequency/duty cycle: 1Hz to 1MHz.

Diode testing and buzzer.

Relative measurement function.

Clear display with LED back light and data hold function.

Auto power 'OFF' and low power indicator.

Auto/manual range. Electronic protection system.

Digital display count: 6000.

Pack includes: digital multimeter, test probes, temperature sensor, clamp-on test lead, USB Interface, CD rom 'PC-LINK' software (compatible with Windows 2000, NT or XP), 9V battery (installed), instruction manual.

PC-LINK software features: measure graph, measure data record, simulate LCD display, analogue dial plate display, measure max/min display, sampling interval, graph export, measure data save.

Dimensions (W x D x H):

165 x 65 x 230mm.

WITH PC LINK SOFTWARE



Model Number	Weight each	Order Code EDI-516	Price/1 RND
DAM060	182g	-3440K	2263.90