



**GROUP 708** **HOT DIP**



Page ..... **662**

**GROUP 716** **SEALANTS & FILLERS**



Page ..... **662**

**GROUP 721** **PAINTS**



Page ..... **663**

**GROUP 727** **CLEANING BATHS**



Page ..... **664 - 665**

**GROUP 727** **DEGREASERS**



Page ..... **665**

**GROUP 732** **CLEANERS & SOLVENTS**



Page ..... **666 - 667**

**GROUP 732** **MAINTENANCE SPRAYS & LUBRICANTS**



Page ..... **668 - 671**

**GROUP 732** **WELDERS ANTI-SPATTER**



Page ..... **671**

**GROUP 732** **AUTOMOTIVE MAINTENANCE & REPAIR**



Page ..... **670**

**GROUP 732** **TAPPING & DRILLING LUBRICANTS**



Page ..... **668**

**GROUP 734** **MARKERS - LINE & PAINT**



Page ..... **672**

**GROUP 740** **ENGINE OILS/ HYDRAULIC OILS**



Page ..... **673**

**GROUP 740** **METAL WORKING LUBRICANTS**



Page ..... **674**

**GROUP 740** **MACHINE LUBRICANTS**



Page ..... **673 - 675**

**GROUP 740** **PROCESS & SYSTEM CLEANERS**



Page ..... **675**

**GROUP 740** **GREASES**



Page ..... **673**

**GROUP 740** **FOOD SAFE LUBRICANTS & CLEANERS**



Page ..... **676 - 678**

**GROUP 741** **SECONDARY CONTAINMENT STORAGE**



Page ..... **679 - 681**

**GROUP 742** **SPILL CONTROL**



Page ..... **682 - 685**



# LUBRICANTS & CHEMICAL PRODUCTS

**Product Groups**  
**703 - 742**

## Product Grading



### Production

High performance industrial tooling designed for continuous use applications on machine tools where repeatability and long tool life are of critical importance.



### Professional

Industrial tooling that has enhanced features and benefits demanded by craftsmen and professional users.



### Industrial

Designed for regular use in industrial applications. Manufactured to stringent quality levels and international standards.



### Workshop

Standard quality tooling for use by tradesmen and generally industrial use.



### Maintenance

Products designed for general maintenance of machines, workshops, garages and some household applications.



### Home Improver


DIY quality tooling. Designed for home use and light industrial applications.

## Contents

Description	Group	Page
Adhesives - Instant	725	663
- Spray	725	663
- Structural	725	663
Automotive Maintenance & Repair	732	668
Cartridge Applicator Guns	715	662
Chain, Drive & Rope Lubricants	732	669
Cleaning Baths	727	665
Degreasers	727	664
Engine Oils	740	673
Food Safe Cleaners	740	677
Food Safe Oils & Greases	740	676 - 678
Hot Dips Coatings	708	662
Hydraulic Oils	740	673
Industrial Cleaners & Solvents	732	666 - 667
Leak Detectors, Flawfinders & Freezer Sprays	732	671
Lubricating & Penetrating Oils	732	669
Markers - Line	734	672
- Paint	734	672
Melting Pots	709	662
Metal Working Lubricants	740	673 - 675
Mould Release Agents	732	670
Paints	721	663
Sealants & Fillers	716	662
Secondary Containment Storage	741	679 - 681
Spill Control	742	682 - 685
Tapping & Drilling Lubricants	732	668

**Protective Coating  
Red-Hot-Dip**

Hot dip strippable plastic coating moulds itself around the component or tool being coated to provide 100% coverage and protects against corrosion and impacts, for up to ten years. The component protected can be easily identified through the translucent coating. Simply removed by peeling it off, leaves behind a thin oil film to provide short term protection against corrosion. The removed protective dip can be reused. Never directly apply heat to melt the protective dip, always use with a suitable melting pot. Working temperature 130°C to 160°C (for optimum results 140°C to 145°C).

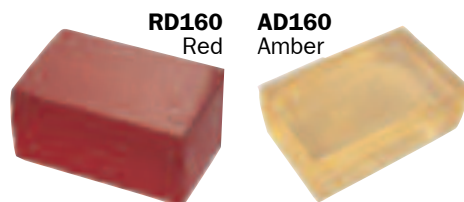

Description (Bars)	Weight each	Order Code KEN-708	Price/1 RND
RD160 Single Bar	0.50kg	-0050K	103.40
RD160 Case (50)	25.00kg	-0250K	4914.00
AD160 Single Bar	0.50kg	-0500K	103.40
AD160 Case (50)	25.00kg	-0550K	4914.00

**Industrial Melting Pots**

A range of melting pots which have been designed for industrial melting of waxes, glues and plastics etc. for coating, casting, protecting etc. The pots are electrically heated and thermostatically temperature controlled from 50°C to 200°C. Constructed from anodised aluminium with ceramic fibre insulation. Pots supplied with 2m cable and fused plug, lifting handle, double-wall heat-conserving lid, on/off switch and safety thermal cut-out. 220/240V as standard.



Capacity Litres Pints	Internal Dimensions Diameter Depth	Maximum Wattage	Order Code KEN-709	Price/1 RND
0.7 1.20	100mm 90mm	275	-1010K	9183.60
2.5 4.40	150mm 140mm	600	-1030K	13453.20
6.0 10.5	200mm 190mm	1125	-1060K	17280.50
12.0 21.0	250mm 240mm	1650	-1120K	24219.00

**P.T.F.E. Tape**

**Gas Type:** 12mm x 5m roll. For gas and hot water pipes (not for potable water). Made to **BS EN 751:3**.

**Water Type:** 12mm x 12m roll. For hot and cold water pipes. Made to **BS 6920 & BS 7786**.

**P.T.F.E. Thread Sealing Tape:** 25mm x 12m roll. Made to **EN571**.




Description	Order Code KEN-983	Price/1 RND
Gas	-8000K	25.80
Water	-9000K	7.20
Thread Sealing Tape	-9010K	32.60

**Non-Setting Sealant****Gas Seal**

Non-setting, off-white compound for use on metallic threaded and face joints carrying gas including aluminium, copper, steel and zinc. Suitable for use with Propane, Butane, LPG and Natural gas. Ideal for boats, camping, motor-homes, caravans, BBQs and most domestic appliances. Full bond strength is achieved immediately dependent upon humidity levels. Can be wiped up with a disposable cloth, any residual excess can be rinsed with water.

**Temperature range:** -20°C to +125°C. Gas  
**Maximum gas pressure:** 2.9psi (0.2bar)



Size	Order Code SHK-720	Price/1 RND
400g	-4010K	147.40

**400g  
TIN****Silicone Sealants****General-Purpose Silicone**

High performance acetoxysilicone provides a permanently watertight flexible seal and offers excellent adhesive properties, making it suitable for use on glass, sanitary-ware, ceramics and non-porous surfaces. For indoor and outdoor use. Weather-proof. Mould-resistant. Life expectancy up to 25 years. Conforms to **BS 5889**.

**Size:** 310ml cartridge.




Colour	Order Code SHK-716	Price/1 RND
White	-3100K	51.10
Clear	-3110K	51.10
Black	-3130K	51.10
Grey	-3140K	51.10

**Sealant Cartridge  
Applicator Guns****Economy Plastic Gun - C3**

Robust, easy to use. Smooth action.

**Max. cartridge size:** 310ml.



Type	Cartridge (max size)	Order Code KEN-715	Price/1 RND
C3	310ml	-1200K	30.00

**Professional Metal Guns**


Extremely robust and ideal for continuous use. Will not twist under pressure. Smooth action for optimum application of sealant.



Type	Cartridge (max size)	Order Code KEN-715	Price/1 RND
C3	310ml	-1000K	63.90
C4	400ml	-2000K	68.40

**Ergonomic Sealant  
Applicator Gun****Heavy Duty Metal Gun - C3**

Extremely robust and ideal for continuous use. Will not twist under pressure, ergonomically designed to reduce operator fatigue. Smooth action for optimum application of sealant.



Type	Cartridge (max size)	Order Code KEN-715	Price/1 RND
C3	310ml	-1400K	90.10





## Floor Paint

Attractive and hard wearing, transforms drab, stained or scuffed concrete and similar surfaces. Suitable for floors in warehouses, workshops, shop floors garages, basements, etc.

**Coverage:** up to 8m<sup>2</sup>/litr (two coats recommended).

Please note, colours are for guidance only.



Colour	Size	Order Code SOL-721	Price/1 RND
Mid Grey	5ltr	-2050E	855.90
Tile Red		-2100K	855.90
Mid Green		-2030C	855.90
Dark Grey		-2040D	855.90
Mid Blue		-2060F	855.90
Safety Yellow		-2120K	838.60

## Anti-Slip Floor Paint

### Tuffgrip

Solvent free industrial quality floor paint. Applied by roller as a one-coat system, to provide traction in areas of slip hazard. Hard wearing, epoxy resin anti-slip coating suitable for use on heavy trafficked concrete, stone, steel and wooden floor surfaces.

**Coverage:** 5m<sup>2</sup> per pack.

Please note, colours are for guidance only.



Colour	Order Code SOL-721	Price/1 RND
Mid Grey	-3050E	2760.00
Safety Yellow	-3080H	2760.00
Tile Red	-3100K	2760.00

## Enamel Paint

This tough enamel has long lasting flexibility when used to cover rust, bare metal and wood, repelling moisture to give long term protection. It must be applied in temperatures of 5° C or above and is sag resistant to eliminate brush strokes, dilutable by white spirit and can be used for interior or exterior applications.



RAL	Colour	Size	Order Code SOL-721	Price/1 RND
9005	Black	1ltr	-6110A	372.60
		2.5ltr	-6110C	807.30
		5ltr	-6110E	1228.40
5012	Blue	1ltr	-6112A	372.60
		2.5ltr	-6112C	807.30
6010	Green	1ltr	-6114A	372.60
		2.5ltr	-6114C	807.30
3000	Red	1ltr	-6117A	372.60
		2.5ltr	-6117C	807.30
		5ltr	-6117E	1228.40
9010	White	1ltr	-6118A	372.60
		2.5ltr	-6118C	807.30
		5ltr	-6118E	1228.40
1007	Yellow	1ltr	-6120A	372.60
		2.5ltr	-6120C	807.30



## Instant Nails


A high strength gap filling solvent-free adhesive that produces a quick 'grab' and replaces mechanical fixings in a multitude of home improvement applications. Dries white and is over-paintable when dry.



Size	Order Code SHK-725	Price/1 RND
310ml	-6500K	43.90

## Instant Adhesive

High performance cyanoacrylate adhesive suitable for use on metal, plastic, china, leather, wood, glass and rubber. Bonds in seconds.

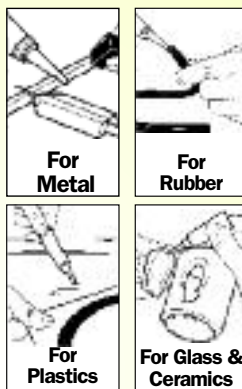

**1001 uses in the Home and Workshop**

Size	Order Code SHK-725	Price/1 RND
3g	-6010K	38.40



## Heavy Duty Spray Adhesive NEW

Provides a flexible but ultra strong bond for many applications from foam backed carpets and carpet tiles, underfelt, flexible foams, fabrics, felt and cork to plywood, softwood, MDF, laminates, metal, hardboard, glass and rigid plastics.

**Size:** 500ml.



Size	Order Code SHK-725	Price/1 RND
500ml	-4240K	145.80

## Rust Covering Enamel Paint

High gloss rust covering enamel paint. Corrosion resistant, can be applied directly to rusty metal and repels moisture providing long term protection. Touch dry in 20 mins (subject to humidity and temperature), no need for primer or undercoat.

**Coverage:** 0.6m<sup>2</sup> per 500ml can.



**500ml CAN**

### Hammered Finish - Aerosol

Colour	Size	Order Code SOL-721	Price/1 RND
Black	500ml	-5210A	120.80
Silver/Grey	500ml	-5310L	120.80

### Smooth Finish - Aerosol

Colour	Weight each	Order Code SOL-721	Price/1 RND
Black	500ml	-5010A	120.80
Blue	500ml	-5020B	120.80
Red	500ml	-5100K	120.80
Silver	500ml	-5110L	120.80
White	500ml	-5130N	120.80
Yellow	500ml	-5140P	120.80

**SOLENT<sup>TM</sup>**  
MAINTENANCE**Just  
Orange****Citrus-Based Solvent Degreaser**

Just Orange is a powerful, citrus-based solvent degreaser for the cleaning and degreasing of engineering components and equipment. Effectively removes heavy oils, greases, bitumen, wet paints, adhesives and sealants from virtually all hard surfaces.

Contains no Chlorinated or Aromatic solvents. For use as an alternative to solvents such as acetone, benzene, butyl cellulose, CFC's, Freon, Methylene Chloride, HCFC's, isopropyl alcohol, methyl ethyl, ketone, mineral spirits, toluene, trichloroethylene, xylene etc.



Size	Order Code <b>SOL-727</b>	Price/1 RND
1ltr	<b>-2800A</b>	<b>151.00</b>
5ltr	<b>-2810B</b>	<b>685.70</b>
20ltr	<b>-2820C</b>	<b>2606.10</b>

**Orange Plus****Citrus-Based Water Rinseable Degreaser**

Orange-Plus is a highly effective, water rinseable solvent degreaser for the removal of stubborn and heavy oils, greases, paints, inks, adhesive and resins from engineering components and equipment. Once cleaned, the contaminants can be rinsed away with water. Suitable for all metals, including plant and machinery, and some plastics.

Contains no Chlorinated or Aromatic solvents. For use as an alternative to solvents such as xylene, toluene, acetone etc.

**Not recommended for use with Parts Washers**

**NATURAL  
FORMULA**  
**SOLENT<sup>TM</sup>**  
MAINTENANCE  
**INDUSTRIAL  
STRENGTH**



Size	Order Code <b>SOL-727</b>	Price/1 RND
5ltr	<b>-2910B</b>	<b>634.50</b>
20ltr	<b>-2920C</b>	<b>2375.30</b>

**Aqueous Orange****Citrus-Based Aqueous Cleaner**

Aqueous Orange is highly concentrated, low alkaline blend of citrus solvents and powerful surfactants, designed to remove oils and greases, inks, polishing compounds and lapping slurry from hard surfaces. It can be diluted with water for maximum economy and its micro-emulsion formula offers the

benefits of water-based efficiency with solvent based performance. It also contains a corrosion inhibitor and can be used both manually and in machine operations. Replaces white spirit, paraffin and highly alkaline cleaners.



Size	Order Code <b>SOL-727</b>	Price/1 RND
5ltr	<b>-2610B</b>	<b>605.10</b>
20ltr	<b>-2620C</b>	<b>2204.10</b>

**Degreasing Station/Parts Washer**

Air operated, strong and durable mild steel degreasing station. Ideal for use as a soaking bath and air agitation facility aids the degreasing process by removing heaviest oil and grime from small parts. Also comes with a flow through brush to deal with caked on grime. Designed to sit on 100ltr barrel.

**Dimensions:**

**Length:** 760mm (30").

**Width:** 510mm (20").

**Height:** 200mm (8").

**Weight:** 20.8kg.

**Working height:**

When on 100ltr drum = 890mm (35").


**Solvent delivery:**

Flow through brush.

**General:**

Powder coated bowl and galvanised splashback sheet.

Tray is mild steel.

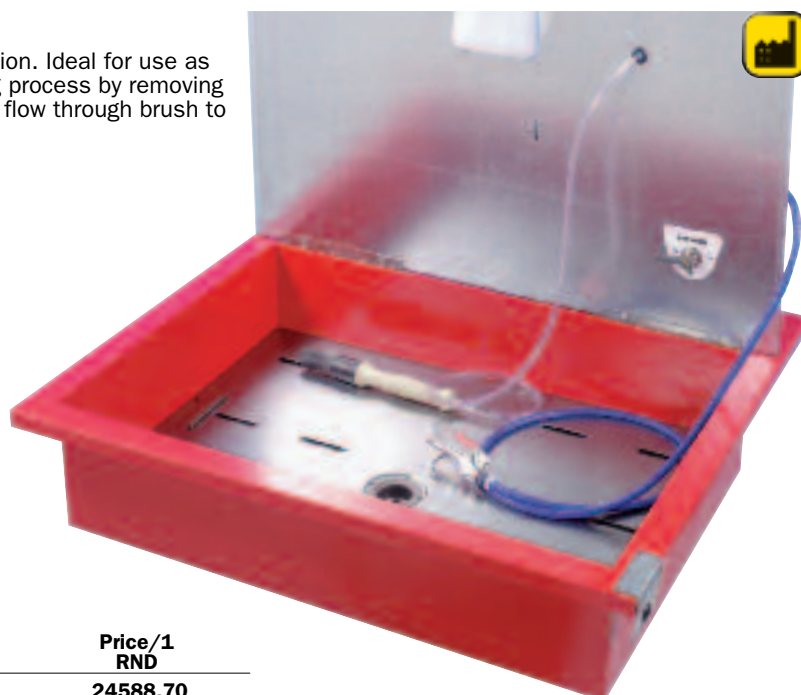

Tray Material	Voltage	Order Code <b>SOL-727</b>	Price/1 RND
Mild Steel	240V Parts Washer	<b>-5240A</b>	<b>24588.70</b>



**KENNEDY** *Parts Washer - Bench Standing*

Used in garage, workshop and industrial applications for degreasing components for inspection and prior to assembly. Recirculated cleaning fluid is filtered before entering the pump and being directed over the work piece. Flexible chrome finish metal delivery hose. Heavy duty non-welded one piece tank. Fully enclosed electric nylon pump. Self-latching fusible linked lid closes in the event of a fire. Triple baked enamel finish. Accepts all common degreasing agents. Shelf keeps parts out of solvent during inspection and drying. Immersion soaking when the parts shelf is removed. Fitted with a 3 pin moulded plug and a 1.6m power cable. Minimum agent capacity 9ltr. Maximum agent capacity 13ltr. Rubber feet. 240V.

**Overall size (L x W x H):** 470 x 340 x 250mm.

**Tank size (L x W x H):** 400 x 310 x 230mm.

**Power rating:** 25W.

**Voltage:** 240V.

**Rated input:** 0.3A.

**Net weight:** 6.5kg.



Model Number	Weight each	Order Code	Price/1 RND
PWB013	7.60kg	<b>-8600K</b>	<b>1094.60</b>

**Replacement Parts**

Description	Order Code	Price/1 RND
Flexible Hose	<b>-6050K</b>	<b>81.80</b>

**Parts Washer - Floor Standing**

Used in garage, workshop and industrial applications for degreasing components for inspection and prior to assembly. Recirculated cleaning fluid is filtered before entering the pump and being directed over the work piece. Flexible chrome finish metal delivery hose. Heavy duty non-welded one piece tank. Fully enclosed electric nylon pump. Self-latching fusible linked lid closes in the event of a fire. Triple baked enamel finish. Accepts all common degreasing agents. Shelf keeps parts out of solvent during inspection and drying. Immersion soaking when the parts shelf is removed. Fitted with a 3 pin moulded plug and a 1.6m power cable. Minimum agent capacity 40ltr. Maximum agent capacity 50ltr. Fitted with a drain plug for easy maintenance. Removable parts basket. Built in replaceable filter. Spare filter included.

**Overall size (L x W x H):** 800 x 550 x 890mm.

**Tank size (L x W x H):** 725 x 490 x 270mm.

**Height of working area:** 750mm.

**Power rating:** 25W. **Voltage:** 240V.

**Rated input:** 0.3A.

**Net weight:** 31kg.



Model Number	Weight each	Order Code	Price/1 RND
PWF050	34.5kg	<b>-8640K</b>	<b>2332.30</b>

**Replacement Parts**

Description	Order Code	Price/1 RND
Flexible Hose	<b>-6060K</b>	<b>108.00</b>
Filter for PWF050	<b>-8640K</b>	<b>91.80</b>
Filter for PWB013	<b>-8600K</b>	<b>91.80</b>
Pump for PWF050/PWB013	<b>-8700K</b>	<b>457.40</b>

**SOLENT**  
MAINTENANCE**Rapid Dry  
Cleaner Spray****SC1-500B**

Solent rapid dry solvent cleaner is supplied in a large 500ml aerosol. The product is formulated to quickly penetrate grease, oil and general soiling from metal/ electrical components and precision parts. The formulation rapidly evaporates leaving a clean, dry surface. Safe on most plastic components. Will soften some lacquers. If in doubt about suitability test on a scrap component or a small area before general application.



Size	Order Code SOL-732	Price/1 RND
500ml	-0100K	140.70

**Low Odour Solvent****SC2-500B**

Very fast drying. Designed for the engineering and electrical industries. As with all solvents test for compatibility before general application.

The low odour level is ideal for items where product odour would be inappropriate.



Size	Order Code SOL-732	Price/1 RND
500ml	-9640K	135.00

**Metal Parts Cleaner -  
Citrus Based****SC3-500B**

Citrus based cleaners are an effective alternative to pure solvent products. Deep penetrating action rapidly removes oils, grease, and general soiling.

**NEW**

Size	Order Code SOL-732	Price/1 RND
500ml	-9660K	135.00

**Trike-Free  
Contact Cleaner****SC2-500C**

An effective solvent based cleaner. The product is formulated to remove oil, grease and carbon dust from electrical switch gear and electronic components. It is safe on most common plastic parts, but will attack lacquer finishes and coatings. If in doubt about suitability, trial the product on a scrap sample first before general application. The product is propelled from the aerosol by CO<sub>2</sub> carbon dioxide gas (non-flammable). Electrical Switch Cleaner fluid is flammable. Always ensure power is switched off before applying this product to electrical equipment.



Size	Order Code SOL-732	Price/1 RND
500ml	-0120K	192.30

**SITESAFE****Trike-free  
Contact Cleaner****CCA500C**

Suitable for cleaning and degreasing delicate components such as those used in electrical equipment. It can be used on most surfaces and will not affect PCBs, delicate plastics or painted surfaces. Non-corrosive. It contains only solvents which are permitted under the Montreal Protocol.



Size	Order Code SSF-732	Price/1 RND
500ml	-3120K	62.10

**ACTION CAN**  
Aerosol & Maintenance**Brake &  
Clutch Cleaner****BC90**

A fast evaporating effective cleaner for brake components. Effective formulation for suppressing dust and debris. Kind to skin.



Size	Order Code ACN-732	Price/1 RND
500ml	-1500K	74.30

**SOLENT**  
LUBRICANTS**Heavy Duty  
System Cleaner****Grade SC-SYSTEM**

For use in cleaning water-based operating fluids and coolants from central systems or individual machines. Free of secondary alkanolamines, heavy metal compounds, phenols, hexahydrotriazine and nitrite. Excellent cleaning action. Storage temperature of 5 to +40°C. **NOTE:** So-Clean System at 1- 2% is added to the used operating fluid about eight to twelve hours before draining. The complete cleaning effect is only achieved if the operating fluid circulates through all working parts of the system. Neither pH value nor foaming of the operating fluid change significantly when So-Clean System is added. Soil in machines, tubes and reservoirs of the system are loosened and re-emulsified. For heavily soiled systems, increasing the dwell time to 24 hours is recommended. Thick sediment deposits are best removed mechanically and rinsed off with clean water. Supplied in 20ltr stacking poly container.



Size	Order Code SOL-740	Price/1 RND
20ltr	-4800B	2141.70



**SITESAFE**



### Antistatic Foam Cleaner

**FCA500**

This cleaner is recommended for the everyday cleaning of electronic and electrical equipment. It removes stubborn stains, nicotine, grease and general grime build-up from plastic, formica, leatherette, ceramics, glass, paintwork or any other non-porous hard surface. Ideal for use in offices, canteens, banks, schools, kitchens, washrooms and many other problem areas. It has been formulated from surfactants and solvents which are safe to use on most surfaces.



Size	Order Code	Price/1 RND
500ml	SSF-732	59.70

### Cold Galvanising Spray

**CGA500**

Fast drying corrosion protection. Matches colour of newly galvanised metal. Ideal for protecting welding joints in galvanised structures. Can be used as a top coat or primer. Compatible with most paint finishes. Contains no CFCs or lead. Fitted with directional spray button designed to assist application in outdoor locations with minimum over-spray.



Size	Order Code	Price/1 RND
500ml	SSF-732	85.10

**SOLENT**  
MAINTENANCE

### Foaming Spray

**SC5-500B**

Cuts through grease, dirt, oil and general soiling, contains no silicones. Ideal for non-porous surfaces. 1000+1 uses in the home, industry, garage or factory.



Size	Order Code	Price/1 RND
500ml	SOL-732	110.50

### Cold Galvanising Spray

**SZ1-500B**

Fast drying corrosion protection. Matches colour of newly galvanised metal. Ideal for protecting welding joints in galvanised structures. Can be used as a top coat or primer. Compatible with most paint finishes. Contains no CFCs or lead. Fitted with directional spray button designed to assist application in outdoor locations with minimum over-spray.



Manufactured and tested to:  
**ASTM B117**  
(Hot Salt Spray)  
**BS AU 148:PT14 1969**  
(Natural Weathering)  
**DIN EN ISO 12944-1**  
(Corrosion Protection of Steel Structures)

Size	Order Code	Price/1 RND
500ml	SOL-732	144.30

### Sticky Label Remover

**LR1-250B**

Designed to quickly and effectively remove old and difficult to remove self adhesive labels from a wide variety of surfaces. Formulated with extra strength for the industrial user, the product will quickly penetrate the label surface and soften the adhesive layer. This product will rapidly remove labels from, metal, tile, ceramic, powder coated and glass surfaces. This product will also remove chewing gum, marker pen ink, and ball point pen ink.



**NEW**

Size	Order Code	Price/1 RND
250ml	SOL-732	146.80

### Anti-Rust Protection Spray

**SP1-500B Green**

A soft thin film moisture/corrosion protective coating. The coating has a slight green colouring which clearly indicates treated areas. Ideal for longer term moisture/corrosion protection of machined components/moulding dies and tools. Removed easily with Solent Industrial Cleaner.



Size	Order Code	Price/1 RND
500ml	SOL-732	152.80

### Biodegradable Degreaser



For cleaning and degreasing equipment and parts. Safe for use all around the house even on delicate surfaces. Powerful degreaser removes difficult soils such as dust-laden oils, fuels and lubricants. For virtually all hard surfaces and ferrous metals. Non toxic, non reactive and non carcinogenic. Derived from renewable resources.



**NEW**

Size	Order Code	Price/1 RND
1ltr	SOL-727	109.60

### Heavy Duty Anti-Rust Protection Spray

**SP2-500B**

High performance corrosion inhibitor, sprayed directly onto the surface to be protected. Light brown in colour to identify treated surfaces. The film has self-healing properties and is easily removed with solvent cleaners. Coating resists moisture, acid and alkali fumes. The film does not contain silicone or halogens. Corrosion protection periods vary with environmental conditions. Typical interior protection in the UK in excess of two years. Product can be re-applied should conditions require it.



Size	Order Code	Price/1 RND
500ml	SOL-732	185.20

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



**Maintenance Liquid****AC-90**

Displaces water, helps start damp engines, penetrates rust, protects from corrosion, lubricates and stops squeaks. Silicone free, electrically non-conductive and can be used on or near electrical components, motor circuits etc, without affecting insulation or causing short circuits. Available in aerosols that use no CFCs and are ozone friendly or in screw top metal cans.

**Does Not Contain Kerosene\*, Paraffin\* or Naphtha\*.**

(\*These products are used by some other maintenance sprays or water displacing sprays but are associated with skin drying and irritations.)

**NEW**

Size	Order Code ACN-732	Price/1 RND
250ml Aerosol	-0050K	28.20
425ml Aerosol	-0150K	52.20
5ltr Can	-0200K	434.10
Applicator	-0500K	49.50

**STD Tapping & Drilling Non-Soluble Foam Lubricant**

Foam aerosol penetrates and is able to cling to normally inaccessible areas and moving cutting edges. Can be used on yellow metals without the risk of staining.



Size	Order Code SHR-732	Price/1 RND
400ml	-4210K	94.40

**Maintenance Spray****SM4-500C 'M4 Plus'**

**Lubricates:** High performance mineral oil based lubricant with PTFE.

**Displaces Water:**

Helps start damp engines.

**Penetrates:**

Releases rusty fixings.

**Cleans & Protects:** Cleans metal surfaces and prevents rusting of treated parts. Does not contain naphtha, kerosene or paraffin which are all associated with operator skin dryness, cracking or dermatitis. CO<sub>2</sub> non-flammable propellant. Does not contain silicone.

Electrically non-conductive at normal ranges found in the home. Care must be taken if used on some electrical plastic components where 'crazing' may occur.



Size	Order Code SOL-732	Price/1 RND
500ml	-0460K	86.30

**Multi-Purpose Oil Spray CO<sub>2</sub>****SM3-500C**

Multi-purpose mineral lubricating oil formulated to have a wide operating range. It lubricates, penetrates, cleans and protects. Use on locks and hinges. Cleans and protects tools. Helps to release stubborn and rusted bolts. Outdoor protection making it ideal for boats. Suitable for household use yet strong enough for industrial applications. Contains a special blend of anti-rust agents which will protect all treated surfaces against corrosion. Does not contain silicone or CFCs.



Size	Order Code SOL-732	Price/1 RND
500ml	-0450K	86.70

**Dry Moly Spray****SD1-500B**

Premium grade dry molybdenum particle lubricant. Fast drying. Ideal for fastener lubrication. Effective on all grades of steel, copper, brass, stainless steel and foundry equipment where high temperatures are common. Also for open gear lubrication and any location where a wet coating is not acceptable or would burn off. Works at up to load rates of 100,000psi. No silicone content.



Size	Order Code SOL-732	Price/1 RND
500ml	-0200K	313.50

**Sherwood STD Liquid (Poly Bottle)**

Low odour liquid. Coats the cutting edge with a film of EP additives.

**Sherwood STD Compound**

Low melting point paste maintains a continual lubricant feed to the cutting edge. Hand applied. Suitable for the most severe cutting operations.



Size	Order Code SHR-732	Price/1 RND
500ml	-4020K	85.50
5ltr	-4060K	1340.70
500g	-4040K	125.20

**Air Tool Oil**

Excellent air release quality, low foaming ability and resists clogging. Contains anti-rust and anti-wear additives. Extremely resistant to water absorption and can be mixed with all mineral oil based lubricants without draining the system. Can be used on air tools. **ISO Grade VG22.**

**EXTENDED RANGE**

Size	Order Code KEN-732	Price/1 RND
500ml	-8000K	95.50
5ltr	-8050K	730.70

**SITESAFE**

**Wire Rope Lube Spray**

**WRS500**

This spray lubricant has been formulated to lubricate and protect wire ropes from corrosion. It has good penetrative qualities to lubricate deep into the core of ropes, displacing water and increasing the life of the rope. 'Hi Tack' additives provide excellent adhesion to metal and reduced 'fling off' during use.



Size	Order Code	Price/1 RND
500ml	SSF-732	79.10

**Penetrating Spray**

**POA500**

Penetrating oil for dismantling, lubricating and cleaning. This oil displaces water leaving a hydrophobic coating to protect surfaces from corrosion. It penetrates threads and crevices to release and lubricate delicate mechanisms, pivot points and sliding surfaces whilst degreasing hard surfaces.



Size	Order Code	Price/1 RND
500ml	SSF-732	59.60

**SOLENT MAINTENANCE**

**Penetrating Spray**

**SM1-500B**

Rapidly penetrates into rust and corroded fittings. Allows easy release and dismantling of fittings exposed to heat and great pressure. Can be used on wet metal components, does not contain silicone, CFCs or chlorine. Lubricates threads during release procedure, 30% less dense than water.



Size	Order Code	Price/1 RND
500ml	SOL-732	86.70

**Copper Grease Spray**

**SM7 500B - With Graphite**

Copper grease spray is particularly effective on commercial/ passenger vehicle braking systems. Extra heavy duty copper grease with graphite. High copper content - effective up to 1100°C. No lead content/no CFCs/no silicone/no chlorinated content. Directional spray button for precision application.



Size	Order Code	Price/1 RND
500ml	SOL-732	136.20

**Chain & Drive Spray**

**CCA500**

This product is a special blend of quality oils, greases and solvents, designed to lubricate and protect all types of cables and slow moving chains. It penetrates quickly into the centre of cables providing excellent protection to the core. It will not sling off, drip or dry out even in adverse conditions. It will also penetrate chain rollers and links enabling smoother working and reduce friction, wear and the possibility of seizure.



Size	Order Code	Price/1 RND
500ml	SSF-732	79.40

**Chain & Drive Spray Lubricant**

**SM6-500B**

Formulated to have a wide range of operating uses. Ideal lubricant for moving chains under extreme load and for chains not fitted with automatic lubrication nor running in oil baths. Formulated with a 'tacky additive' to resist 'throw off' on rapidly moving chains and drives. Ideal for fork trucks, conveyer systems, motorcycle chains. Can be used as a general-purpose lubricant for items subjected to extreme weather conditions. Can be used as a slideway lubricant for machine tools. Strong anti-rust qualities. Does not contain silicone or CFCs.



Size	Order Code	Price/1 RND
500ml	SOL-732	145.20

**Drive Belt Dressing Spray**

**SB1-500B**

Reduces slip on drive belts and helps to stop belt squeal. Can be used on drive belts exposed to weather, ideal for farm machines, alternator drive belts and fan belts. Helps to stop cracking and extends belt life. Can be used on rubber, leather, canvas and most types of synthetic belts.



Size	Order Code	Price/1 RND
500ml	SOL-732	177.70

**EP Open Gear Spray**

**SM8-500B - With Molybdenum**

Solent EP Open Gear Spray lubricant is a premium extreme pressure lubricant packed in a 500ml aerosol. Based on molybdenum disulphide anti-wear additives. Suitable for lubricating all open gears where a thin film is specified. Suitable for temperatures as low as -40°C to +100°C.



Size	Order Code	Price/1 RND
500ml	SOL-732	190.60





### Silicone Mould Release

#### SR1-500B - For Plastic and Rubber

Heavy duty silicone lubricant and release agent. Formulated with a high silicone content. The product is suitable for a wide range of uses. SR1-500B is a dry, non-oily, non-greasy product. Water clear with no odour.



Size	Order Code SOL-732	Price/1 RND
500ml	-0700K	182.10

### Silicone Mould Release

**SR6-500B - Thermoplastic**  
Silicone based. Formulated to provide effective release of plastics with lower melt temperatures. Effective with natural rubbers. Effective to 200°C, excellent surface finish.



**NEW**

Size	Order Code SOL-732	Price/1 RND
500ml	-9720K	135.00

### Silicone Mould Release

#### SR2-500B - Heavy Duty

Heavy duty silicone lubricant and release agent. Formulated with a high silicone content. Suitable for a wide range of uses. SR2-500B is a dry non-oily, non-greasy product. Water clear with no odour.



Size	Order Code SOL-732	Price/1 RND
500ml	-0720K	190.10

### Silicone Free Mould Release

#### SN1-500B - For Plastic and Rubber

Specifically formulated for rapid release of moulded components. Particularly suitable for moulded items which require further process, eg painting, printing and thermo welding.



**NEW**

Size	Order Code SOL-732	Price/1 RND
500ml	-9680K	135.00

### PTFE Mould Release

#### SR3-500B - Dry Film

Provides a micro-thin surface coating for the inner surfaces of injection moulding tools/dies, thus enabling easy component release. The coating will not bridge complex mould profiles and will not interfere with precision fits. The applied PTFE film will not transfer to the moulded item and can be used where a dry slip surface is required such as production line slides, tracks or tables.



Size	Order Code SOL-732	Price/1 RND
500ml	-0740K	180.10

### Silicone Mould Release

#### SR4-500B - For Polyurethane

Specifically for use with integral skin and elastomeric polyurethanes. Provides high gloss finish, low build-up on the mould surface generated to 200°C. Silicone based product may not be suitable for use where painting, plating work is required.



**NEW**

Size	Order Code SOL-732	Price/1 RND
500ml	-9700K	135.00



### Concentrated Screen Wash

Solent™ screenwash can be used all year round and is the ideal way to keep your windscreen clean and clear of insects, road grime and traffic film. The anti-smear formula leaves a crystal clear windscreen with every wash and resists freezing. Ideal for winter motoring. Contains water softeners.

#### Dilution Recommendation

**Summer:** 25% 1 part wash to 3 parts water.

**Winter:** 50% 1 part wash to 1 part water.

**Harsh Winter:** use neat.



Size	Order Code SOL-732	Price/1 RND
5ltr	-9400K	118.40
25ltr	-9420K	435.20



### Blue Anti-freeze & Coolant

Suitable for all engine types. Provides year round protection. Prevents freezing in the winter and overheating in the summer. Contains anti-corrosion additives. Inhibits rust for up to 2 years. Works to temperatures of -55°C. It is ready mixed, requires no dilution.



**NEW**

Size	Order Code SOL-740	Price/1 RND
1ltr	-5853D	65.20
5ltr	-5853H	242.40
20ltr	-5855C	1042.60

**SITESAFE**



### Leak Detector Spray

**LDA500**

For checking for the most minute leaks in any gas or air pressurised systems including commercial vehicle air brakes and pressure vessels.

Contains no alcohols or solvents, is not caustic and contains a rust inhibitor. Spray directly onto the suspect area using the extension tube and examine for bubbling which will indicate leakage.



Size	Order Code	Price/1 RND
500ml	<b>SSF-732</b>	<b>58.70</b>

### De-ionised Water

**DW25**

For use in lead-acid car batteries. Also suitable for domestic appliances such as steam irons and steam cleaners, avoids problems caused by scaling. Can be used as a final rinse in car washing to avoid 'spotting'. Also suitable for rinsing scientific glassware.



Size	Order Code	Price/1 RND
25ltr	<b>SOL-732</b>	<b>210.40</b>

**SOLENT**  
MAINTENANCE

### Leak Detector Spray

**SL1-400A**

A specially formulated, performance white fluid, designed to identify even the smallest gaseous leak. Applies a thin uniform film of surface active agents which identifies any leak or bleeding of joints.

Bubbles in the film indicate the location of the leak. Will not give a false reading if mechanical sensing equipment is used. Suitable for use with most common gases.



Size	Order Code	Price/1 RND
400ml	<b>SOL-732</b>	<b>102.80</b>

### Fault Detector Freeze Spray

**NEW**

**SFC-415F**

Fault Detector Freezer spray is a very cold rapidly evaporating high pressure gas jet. Applying to electronic components will lower the temperature of the component. Any faulty overheating component will cool and return to correct operation, thus indicating the faulty component. Cools objects very rapidly down to temperatures of -50°C. Can also be used to shrink fit metal parts where the application of heat would be inappropriate and can be used to freeze chewing gum deposits to aid removal.

**Size:** 415ml



Size	Order Code	Price/1 RND
415ml	<b>SOL-732</b>	<b>111.80</b>

### 3-Part Flaw Detector Inspection System

Fast reliable method for visually inspecting and spot-checking surfaces of welds, exotic alloys or standard metals, highly stressed structural members, critical castings, shafts, gears, spindles, and any other hard part where identification of surface flaws is essential. Detects flaws such as cracks, pin holes, welding laps and porosity either during manufacture or on-site.



### Flaw Detector Cleaner Spray

**SF1-500B**

Quick drying, powerful solvent for cleaning surfaces prior to testing. Removes contaminants including oils, greases and grime.

Size	Order Code	Price/1 RND
500ml	<b>SOL-732</b>	<b>148.20</b>

### Flaw Detector Dye Penetrant

**SF2-500B**

Highly sensitive red dye, for use when detecting flaws on metal components under normal lighting conditions.

Size	Order Code	Price/1 RND
500ml	<b>SOL-732</b>	<b>133.20</b>

### Flaw Detector Developer

**SF3-500B**

White film to highlight any faults which have been detected when using Flaw Detector Penetrant. The product should be removed using Flaw Detector Cleaner Spray once cracks have been found and marked.

Size	Order Code	Price/1 RND
500ml	<b>SOL-732</b>	<b>142.20</b>

### Water Based Anti-Spatter Fluid

**SW2-400C**

No solvent or silicone content. Fine spray pattern gives good coverage, prevents spatter build-up on jigs, work. Ideal where further process work is involved, eg painting, galvanising with a rust inhibitor.



**NEW**

Size	Order Code	Price/1 RND
500ml	<b>SOL-732</b>	<b>135.00</b>

### Welder's Anti-Spatter Spray

**SW1-400C**

Solvent-based coating applied to metal before welding to prevent spatter from sticking to the metal. CO<sub>2</sub> propelled aerosol. Non-flammable. Silicone-free and removable with solvents prior to galvanising or painting.



Size	Order Code	Price/1 RND
400g	<b>SOL-732</b>	<b>60.20</b>

### Welder's Anti-Spatter Fluid

Reduces the risk of joint puddling and greatly reduces preparation time prior to final painting. Does not affect any subsequent galvanising or painting operations. Evaporates under normal weld temperatures. Dichloromethane and silicone-free. Non-flammable, non-toxic, non-corrosive and bio-degradable.



Size	Order Code	Price/1 RND
5ltr	<b>SOL-732</b>	<b>112.10</b>
20ltr	<b>SOL-732</b>	<b>410.10</b>



**GROUP 734 MARKERS - LINE & PAINT**
**KENNEDY Line Markers**

For use on car parks, factory/ warehouse floors, playgrounds, sports fields, tennis courts, leisure centres and road surfaces.

For stencils, line or free hand marking. CFC free formula, contains no lead additives. Fully compatible with major brand applicators.

**Size:** 750ml can.



**750ml Can**

Please note, colours are for guidance only.

Colour	Application	Order Code KEN-734	Price/1 RND
White	General Marking	-6020K	222.10
Yellow	Hazard/Caution	-6040K	222.10
Blue	Mandatory	-6060K	222.10
Red	Prohibition/Danger	-6080K	222.10
Green	Safe Condition/Direction	-6100K	222.10
Orange	Hazard/Caution	-6120K	222.10
Black	Deletes Existing Lines	-6140K	222.10
Grey	Deletes Existing Lines	-6160K	222.10

**Line Marking Gun**

Manufactured from reinforced nylon. For offering trigger action to line marking spray cans, giving improved comfort during prolonged use.



Description	Order Code KEN-715	Price/1 RND
Line Marking Gun	-6200K	408.90

**Industrial Paint Markers**

Designed for countless metal marking applications.

Can be used for marking greasy, rusty, or new metal surfaces.

Also suitable for marking glass, plastic, wood, ceramics etc.

Ballpoint nozzle cap will only allow ink flow when applied and pressed to the workpiece - ink cannot be spilt from the cap unintentionally.

One head can be interchanged from differing inks and bottles.

Can be refilled from one litre bulk refills of the specially formulated ink.



Please note, colours are for guidance only.

Colour	Size	Order Code KEN-734	Price/1 RND
Yellow	46ml	-3020K	97.10
White	46ml	-3040K	97.10
Blue	46ml	-3060K	97.10
Green	46ml	-3080K	97.10
Black	46ml	-3100K	97.10
Red	46ml	-3120K	97.10
Orange	46ml	-3140K	97.10

**Ink Refill Cases**

Colour	Size	Weight each	Order Code KEN-734	Price/1 RND
Yellow	1ltr	1.4kg	-3210K	722.40
White	1ltr	1.4kg	-3230K	722.40

**Ballpoint Head**

Replacement ballpoint head for Kennedy Industrial paint 46ml marker bottles.

Material	Ball Size	Order Code KEN-734	Price/1 RND
Nickel	2.4mm	-3500K	223.60


**Bullet Tipped Industrial Paint Markers**

For use on steel, aluminium, rubber, timber, plastic, ceramics and other materials. Bullet tipped. 2.3mm point size.



Colour	Order Code SOL-734	Price/1 RND
Black	-0010K	66.90
Blue	-0020K	66.90
Green	-0030K	66.90
Red	-0040K	66.90
White	-0050K	66.90
Yellow	-0060K	66.90

**STUARTS Micrometer Paste**

Oil-based paste for indicating high spots on machine bearings, machine tool beds etc.

Easily removable with methylated spirit.

**EXTENDED RANGE**



Colour	Pack Size	Order Code MIR-734	Price/1 RND
Blue	32g Tube 38g Tin	-8810B -8800A	85.50 92.70
Red	38g Tin	-8850C	78.10



## Supergrade FS2™ Engine Oil

### Semi-Synthetic 10W/40

Refined mineral oil with special multifunctional synthetic additives: For all petrol, diesel and LPG cars, vans and lorries. For multi valve, fuel injected and turbo charged performance vehicles. Can be mixed with other oils. Assists easy engine starting in cold weather. Assists in reducing fuel consumption. Gives far greater protection against engine wear than non-synthetic oil. Excellent lubricity in all conditions. Excellent sludge control in 'stop-start' urban motoring conditions. Affords high protection at motorway speeds. Increased oil change intervals - change your oil less often. Meets the performance level requirements for: **API/SL/CH-4; Mercedes Benz 227.5; 229.1; 228.0/1; VW 501.01; 505.00, MAN 270/271.**



Grade	Size	Order Code SOL-740	Price/1 RND
10W/40	5ltr	-3010E	330.20

## Lithium Grease

### So-Grease EP2

High load lead-free lithium grease. Contains anti-rust additives to protect against corrosion. Anti-oxidants included to prolong product life. High ageing stability/high oxidation stability. Supplied in 400g, 5kg, 12.5kg or 50kg containers.



Pack Type	Size	Order Code SOL-740	Price/1 RND
Cartridge	400g	-5100K	44.70
Tub	5.00kg	-5105C	485.40
Pail	12.5kg	-5110M	1125.30

## Solent 'Plus' Slideway & General-Purpose Lubricant Oil

### Grade VG68

Excellent lubricating properties under high pressure working conditions. Anti-wear additives to maximise machine tool life. Lubricates and flows freely even at very low temperatures. Eliminates slip stick and judder. Eliminates pick up and scoring. Supplied in 20ltr stacking poly container or 205ltr barrels.



Grade	Size	Order Code SOL-740	Price/1 RND
VG68	20ltr	-4368B	1230.60

## High Performance Hydraulic Oil

### So-Hydra 'Plus' VG

Excellent demulsifying properties (water and water containing fluids are rapidly separated). Very good corrosion protection to steel. Good corrosion protection to copper. High ageing stability/high oxidation stability. Good anti-wear protection. Very good hydrolytic stability. Excellent filtration behaviour. Low foaming. Excellent air release.



Grade	Size	Order Code SOL-740	Price/1 RND
VG32	20ltr	-4032B	1056.80
VG46	20ltr	-4046B	1056.80
VG68	20ltr	-4068B	1056.80
VG100	20ltr	-4100B	1055.70

## Very High Viscosity Index Hydraulic Oil

### So-Hydra 'Plus' VHV1

Low foaming tendency. Good air release properties. High ageing stability/high oxidation stability. Good corrosion protection. Very good viscosity/temperature behaviour. Very good wear protection. High viscosity index. Wide service temperature range.



Grade	Size	Order Code SOL-740	Price/1 RND
VG68	20ltr	-4168B	1106.40

## High Performance Gear Oil

### So-Gear 'Plus' EP

Excellent corrosion protection. Low foaming, excellent air release. Excellent demulsifying properties (water and water containing fluids are rapidly separated). High ageing stability/high oxidation stability. Extremely high load-carrying capacity, extreme pressure, anti-wear performance. Excellent bearing wear protection (under mixed friction conditions) - FE8. Excellent protection from scuffing, excellent wear protection - FZG. Excellent micropitting resistance in the load stage and endurance test.



Grade	Size	Order Code SOL-740	Price/1 RND
VG100	20ltr	-4410B	1261.80
VG220	20ltr	-4430B	1275.10
VG320	20ltr	-4440B	1220.30





### Soluble Cutting Oil - Aluminium

#### So-Cool 'Plus' Aluminium

Semi-synthetic, environmentally improved – does not contain sodium nitrite, phenols, triazene, PTBBA or chlorinated additives. Enhanced sump life and excellent anti-foam characteristics. Optimum tool life on the most arduous jobs. Excellent corrosion protection and lubrication to cutting areas, machine fixtures, slides etc. Low emulsion odour. Low drag out losses. Easily removed in splash areas. Resists the formation of aluminium soaps - Improves filtration and machine cleanliness.

#### Recommended concentrations:

General machining 7% or (a dilution of 14 to 1). Heavy duty machining 10% or (a dilution of 10 to 1).

Supplied in 20ltr stacking poly container.



Grade	Size	Order Code SOL-740	Price/1 RND
SC-ALU	20ltr	-4533B	1265.50

### Soluble Cutting Oil Multi-Purpose

#### So-Cool 'Plus' GP

Environmentally improved - does NOT contain phenols, boron, triazene, PTBBA or chlorinated additives. Based on highly refined mineral oils. High degree of machine tool lubrication. Ideal for a wide range of machining operations. Low odour. Low unit cost. Specially formulated for use in both hard and soft waters.

#### Recommended concentrations:

General machining 7% (dilution of 14 to 1). Grinding (surface, cylindrical centreless) 2 - 3% (dilution of 50 to 1 or 33 to 1).

Supplied in 20ltr stacking poly container.



Grade	Size	Order Code SOL-740	Price/1 RND
SC-GP	20ltr	-4508B	931.70

### Soluble Cutting Oil - Cast Iron

#### So-Cool 'Plus' Iron

Semi-synthetic formulation. Excellent anti-foam characteristics. Environmentally improved - does NOT contain sodium nitrite, phenols or chlorinated additives. Excellent sump life and corrosion protection. Superb tramp oil rejection characteristics. Enhanced tool tip life. Low drag-out loss - highly cost effective in use. Based on highly refined mineral oil. Increased detergency.

#### Recommended concentrations:

General machining 5% or (a dilution of 20 to 1). Arduous operations/difficult materials 7% or (a dilution of 14 to 1). Grinding 3% or (a dilution of 33 to 1).

Supplied in 20ltr stacking poly container.



Grade	Size	Order Code SOL-740	Price/1 RND
SC-CAST	20ltr	-4563B	1423.90

### Soluble Cutting Oil - Stainless

#### So-Cool 'Plus' Stainless Steel

Environmentally improved - does NOT contain phenols, boron, triazene, PTBBA or chlorinated additives. Based on highly refined mineral oils. High degree of machine tool lubrication. Ideal for a wide range of machining operations. Low odour. Low unit cost. Stable emulsions in very soft and very hard water.

#### Recommended concentrations:

General machining 7% (dilution of 14 to 1). Heavy machining 10% (dilution of 10 to 1).

Supplied in 20ltr stacking poly container.



Grade	Size	Order Code SOL-740	Price/1 RND
SC-INOX	20ltr	-4600B	1335.90

### Soluble Cutting Oil - Aerospace

#### So-Cool 'Plus' Aerospace

Specifically designed for use in the aerospace industry on all high performance alloys, Stainless steel, titanium and aluminium alloys - in particular series 7000 aluminium.

#### Advantages/Benefits:

Nitrite and chlorine-free.

Secondary and tertiary amine-free formulation.

Reduced risk of staining and corrosion.

Long sump life.

Emulsifiable residues to promote clean working environment.

Does not contain PTBBA.

#### Approvals:

AIRBUS ABR 9-0204.

The military division of British Aerospace.

Turkish Aerospace Industries (TAI).

Supplied in 20ltr stacking poly container.



Grade	Size	Order Code SOL-740	Price/1 RND
SC-AERO	20ltr	-4570B	1464.90

### Soluble Grinding Oil - Synthetic

#### So-Cool 'Plus' Syn Grinding

Fully synthetic formulation. Long working life therefore economical. Minimises wheel glazing. Effective corrosion resistance. Stable emulsions in soft and hard water. Does not contain PTBBA.

#### Recommended concentration for general machining operations:

Grinding Cast Iron 2 % to 3.5%

(dilution of 50 to 1 or 30 - 1).

Steel and Ni/Cr steel 2% (dilution of 50 - 1).

Supplied in 20ltr stacking poly container.



Grade	Size	Order Code SOL-740	Price/1 RND
SC-GS	20ltr	-4620B	1253.40

## SOLENT Water Mixer

Water and chemical mixing equipment system that is approved for use by the water regulation authority (WRA) to prevent the possibility of back flow. This is to safeguard against the possibility of chemicals finding their way into the mains water supply. Mixes water and chemicals to metered concentrations with approved air gap back flow prevention incorporated into the unit. Offers an economical way of blending chemicals directly from the mains water system without the requirement for any additional pipe-work, non-return valves or back flow prevention systems.




Product Number	Order Code	Price/1 RND
SM9100	<b>SOL-740</b> -9100K	<b>2608.20</b>

## Tramp Oil Belt Skimmers

Designed to effectively and simply remove tramp oil floating on the surface of cutting fluid. Prevents the 'Monday morning smell', extends coolant life and reduces the risk of dermatitis. Compact units fit to the side or above the tank. 240V. Supplied with plug. Product FT400 can be run continuously.

**Overall length:** 440mm  
(from top of bracket to bottom of belt).  
**Maximum insertion depth:** 150mm.  
**Case dimension (L x W x D):**  
80 x 80 x 502mm.  
**Belt width:** FT300 = 30mm; FT400 = 40mm.

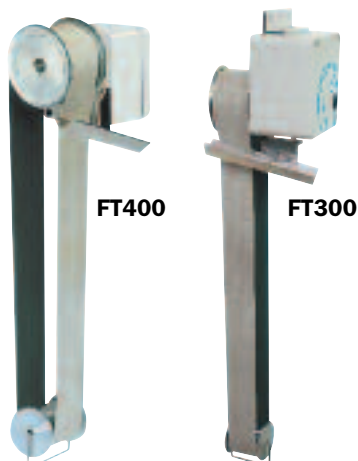

Product Number	Removal Rate	Order Code	Price/1 RND
FT300	3ltrs per hr	<b>SOL-740</b> -8860B	<b>3701.90</b>
FT400	4ltrs per hr	<b>-8880D</b>	<b>6496.40</b>

## Sump Emptier

With stainless steel Venturi pump. Screws into 205ltr oil drums. Uses compressed air to create a powerful vacuum. Empties liquid and suspended solids from tanks and can fill a drum in as little as 90 seconds, making it ready for appropriate disposal. Shuts off automatically when done.



Product Number	Order Code	Price/1 RND
PM175K	<b>SOL-740</b> -8940G	<b>7055.30</b>

## Universal Dewatering Fluid

### Grade SP-DWF

Used for the drying of metal parts and tools. Resistance to acid and alkaline migration makes this suitable following galvanic coating and washing processing e.g. gear boxes, motors and their components. Ideally used in immersion baths at room temperature but is also suited to spraying. Excellent dewatering. No film. Barium-free. 20ltr stacking poly container.



Grade	Size	Order Code	Price/1 RND
SP-DWF	20ltr	<b>SOL-740</b> -4270B	<b>1323.40</b>

## OXFORD Precision Portable Optical Refractometer

For determining the concentration of oil in water emulsions and transparent solutions, such as machine shop coolant. Maintaining the correct mixture in coolant systems is vital to ensure optimum performance from cutting tools. To protect the machine and workpiece from corrosion and to reduce the risk of health hazards arising from incorrect concentrations of water soluble oils. To economise the use of water base cutting fluids and grinding fluids.

**Range ND:** 1.333 - 1.356. Bx: 0 - 15%.

**Eye-piece magnification:** 11x.

**Telescopic lens magnification:** 4x.

**Accuracy:**  $\pm 0.0003 \pm 0.2\%$

**Lattice value:** 0.0005 0.2%


Supplied in high quality fitted metal case complete with calibration screwdriver and operator manual.



Lens for Portable Refractometer

Dimensions	Weight each	Order Code	Price/1 RND
38 x 38 x 185mm	30g	<b>OXD-336</b> -1010K	<b>2326.50</b>

Description	Weight each	Order Code	Price/1 RND
Lens for Portable Refractometer	10g	<b>OXD-398</b> -3630K	<b>162.40</b>



Calibrated Refractive Scale

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



**Food Safe  
Lubricating Oil**

This lubricant is completely clear, odourless and food safe. It contains no mineral hydrocarbons and is **FDA** compliant and **INS H1 registered**. It is a hydrophobic oil and therefore does not take in water, providing a barrier between water condensation and metal surfaces. This versatile lubricant can be used on sliding and rolling element bearing surfaces, metal, wood and plastics. Non-flammable. Non-toxic. Anti-corrosive. Safe for use at temperatures from -60° to +260°C.



Size	Order Code	Price/1 RND
500ml	<b>-5960G</b>	<b>127.20</b>
5ltr	<b>-5970H</b>	<b>937.10</b>

**Food Safe  
Penetrating Oil**

For dismantling, lubricating and cleaning. This odourless oil is tasteless and displaces water leaving a hydrophobic coating to protect surfaces from corrosion. It penetrates threads and crevices to release and lubricate delicate mechanisms, pivot points and sliding surfaces whilst degreasing hard surfaces. Can be used as a light lubricant.

**FDA Compliant. INS H1 registered.** Food safe. Synthetic translucent. Tasteless water white fluid. Non-toxic. Anti-corrosive.

**Size:** 500ml aerosol.



Size	Order Code	Price/1 RND
500ml	<b>-5930D</b>	<b>138.50</b>

**Food Safe Belt Dressing**

This **H1 registered** product is designed to extend life of leather, rubber and synthetic belts. Cleanly applied from the 500ml aerosol, it improves grip and allows the belt to transmit full power without slipping even in wet and damp environments.

**Size:** 500ml aerosol.



Size	Order Code	Price/1 RND
500ml	<b>-6760F</b>	<b>116.50</b>

**Food Grade  
Multi-Purpose Lubricant****AC90-FG H1**

Food grade multi-purpose maintenance liquid lubricant is industrial strength. Holds **H1** approval from **NSF # 143549** and **Ins # 1795389** and therefore can be used safely in all food processing locations. The only maintenance spray certified by both the **NSF** and **Ins**. Does not contain silicone or CFCs. Tasteless and odourless.

**Size:** 425ml aerosol.

**NEW**

Size	Order Code	Price/1 RND
425ml	<b>-0260K</b>	<b>95.30</b>

**Food Grade Silicone  
Release Agent****SP90-FG H1**

Superior silicone dry lubricant formulated to provide extra performance and maximum silicone release. Temperature range -65°C to +315°C. Holds **H1** approval from

**NSF # 143541** and **Ins # 1795388**. Odourless, tasteless, chemically inert.

**Size:** 500ml aerosol.

**NEW**

Size	Order Code	Price/1 RND
500ml	<b>-9010K</b>	<b>135.70</b>

**Food Grade Chain & Drive  
Lubricant****CD90-FG H1**

Holds **H1** approval from **NSF # 143540** and **Ins # 1795390**. Clear viscous oil with a flashpoint 240°C.

Viscosity 20°C at 238mm<sup>2</sup>/s.

Density at 15°C .865kgm<sup>3</sup>.

Boiling point 370°C.

No taste or smell.

**Size:** 500ml aerosol.

**NEW**

Size	Order Code	Price/1 RND
500ml	<b>-2260K</b>	<b>163.90</b>



## Food Safe White Grease

Intended use for lubrication of bearings, slides and all delicate mechanisms used in the food manufacturing/processing industry. Maximum operating temperature 150°C with excellent load carrying capacity and water resistance. Non-toxic.

**FDA Compliant.**  
**NSF H1 registered.**



Size	Order Code <b>SOL-740</b>	Price/1 RND
500ml	<b>-6850E</b>	<b>219.20</b>

## Food Safe Degreaser

This **H1 registered** all-purpose cleaner/degreaser is designed for food production areas where incidental contact may occur. It is non-abrasive, non-chlorinated, water clear, low odour, fast evaporating, it leaves no residue or deposits behind. It can be safely used on machinery, worktops and floors.

**Size:** 500ml aerosol.



Size	Order Code <b>SOL-740</b>	Price/1 RND
500ml	<b>-6810L</b>	<b>158.50</b>

## Food Safe High Tech Grease

Fully synthetic translucent non-melting grease that allows fluid to penetrate into machine parts before setting to a No. 2 rated grease. Protects and lubricates with a non-toxic anti-corrosive shield. Non-toxic lubricant ingredients listed by the **FDA** and is **InS H1 registered**. Totally salt or fresh water-resistant to be used inside and out on machinery in temperatures ranging from 40°C to +340°C.



Size	Order Code <b>SOL-740</b>	Price/1 RND
500ml	<b>-6220C</b>	<b>205.10</b>

## Food Safe Wipes

### Hand Wipes

These non-toxic single use wipes are excellent for killing lethal bacteria and preventing cross-contamination.

**Size:** 20 x 30cm.



Quantity Pk Type	Order Code <b>SOL-930</b>	Price/1 RND
200 Tub	<b>-4400K</b>	<b>205.20</b>

## OILS & GREASES

GROUP  
**740**

## Food Safe Anti-Seize Paste

Formulated for use on assemblies in difficult areas where fretting corrosion and corrosion induced by wet environments occur. It can also be used to lubricate slow moving slides and pivot pins. Resistant to hot, cold and salt water it can be used across a wide temperature range where the solid lubricate including PTFE gives excellent dry lubrication and forms a barrier between all surfaces. Non-toxic, it complies with **FDA** regulations and is **H1 registered**.



Size	Order Code <b>SOL-740</b>	Price/1 RND
500g	<b>-6720B</b>	<b>199.70</b>

## Food Safe Wipes

### Probe Wipes

These single-use wipes are for the disinfectant cleaning of food probes to prevent cross-contamination.

Tub of 175 (13 x 13cm) wipes.



Quantity/ Pk Type	Order Code <b>SOL-930</b>	Price/1 RND
175 Tub	<b>-5500K</b>	<b>99.70</b>

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



**GROUP 740 FOOD SAFE OILS & GREASES**



**Food Safe Hydraulic Oil**

Designed for use in areas where incidental contact may occur, these oils are based on high quality synthetic grade oils, compounded with state of the art anti-corrosion and EP substances. Non-toxic, they comply with **FDA regulations** and are **INS H1 registered**.



Grade	Size	Order Code SOL-740	Price/1 RND
G32	20ltr	-6160A	4397.40
G46	20ltr	-6170B	4397.40
G68	20ltr	-6180C	4397.40
G100	20ltr	-6190D	4396.70

**Food Safe Clear Gear Oil**

These gear oils are made from synthetic base oils combined with selected additives to produce a high performance gear lubricant. With excellent corrosion protection, oxidation and thermal stability they extend gear life/operating duty and lower maintenance costs. **H1 registered**.



Grade	Size	Order Code SOL-740	Price/1 RND
G150	20ltr	-6300A	4657.50
G220	20ltr	-6310B	4657.50
G360	20ltr	-6320C	4657.50
G460	20ltr	-6330D	4657.50

**Food Safe Comp Tech Oil**



These compressor oils are fully synthetic, comply with **FDA regulations** and are **H1 registered**. Designed for use in food production and pharmaceutical industries they have a low friction coefficient reducing wear and energy consumption. They reduce residue, varnish and scum build up which leads to lower maintenance costs, downtime and loss of productivity.



Grade	Size	Order Code SOL-740	Price/1 RND
G46	20ltr	-6370A	4533.30
G68	20ltr	-6380B	4533.30
G100	20ltr	-6390C	4533.30

**Synthetic Grease**

Constructed using pure non-toxic synthetic base oils, combined with PTFE and a complex mix of anti-oxidant and EP packages. Completely resistant to salt water and high humidity environments. Dielectric and can be used to protect electrical equipment from ingress of water. Lubricates bearings, chains and sliding surfaces including plastic bearings and runners. Has a wide temperature operating range -40°C to 340°C. Grease clean food safe lubricant. Non-melting.



Size	Order Code SOL-740	Price/1 RND
100ml	-6200A	72.80
400ml	-6210B	267.20
5.0kg	-6215E	1309.30
12.5kg	-6217H	2347.60

**Food Safe Silicone Grease**

A versatile silicone grease for operation in extremes of high and low temperature. Can also be used on food product applications or where water repellent properties are of prime importance as it offers excellent physical performance and is **INS H1 registered**. Non-melting, water repellent, odourless, non-toxic, low volatility. High dielectric. resistant to oxidation. Thermally stable ozone resistant. Minimal effects on rubbers, plastics and metals. Unaltered by UV light.



Size	Order Code SOL-740	Price/1 RND
100ml	-6250D	165.30
400ml	-6260E	341.90
500g	-6270F	436.50
5.0kg	-6280G	3067.80
12.5kg	-6290H	4943.90

**Food Safe White Grease**

Intended use for lubrication of bearings, slides and all delicate mechanisms used in the food manufacturing/ processing industry. Maximum operating temperature 150°C with excellent load carrying capacity and water resistance. **FDA Compliant**. **INS H1 registered**. Non-toxic.



Size	Order Code SOL-740	Price/1 RND
400ml	-5900A	138.30
5.0kg	-5905C	975.30
12.5kg	-5910E	1801.70



**Group 540**



### Bench Tray

For use in a laboratory or other areas where small containers are in use and it is essential that any spills are contained. Removable grate for easy cleaning.



Product Number	Dimensions (cm)	Sump (ltr)	Order Code SOL-741	Price/1 RND
SW-T1	63 x 55 x 7	9.5	-6530T	1629.90

### Drum Plug

Ideal for rapid response to unexpected releases of liquid. Provides temporary plugging of holes in drums or pipes. Pre-mixed putty is ready to use. No surface preparation is required. Applies directly onto container to form a seal. Bentonite clay granules that form a barrier to aqueous liquids. Non-toxic.



Tub Size	Order Code SOL-741	Price/1 RND
1kg	-2880R	436.50

### Salvage Container

Where a drum is damaged or leaking UN transport regulations require that it is transported in a leakproof container and this container fully meets these regulations. The 100% polyethylene construction ensures compatibility to a broad band of chemicals and oils. The lid is fully threaded and can be tightened using a bar or piece of timber across the slots. The moulded design externally allows for lifting by a fork-lift or sling.



**NEW**


Product Number	Dimensions (cm)	Sump (ltr)	Order Code SOL-741	Price/1 RND
SSD-360	81 dia x 105	360	-6020B	4592.10

### Workfloors

Perfect for machine cleaning and lubrication areas. Versatile modular systems to allow bespoke configuration.


#### Workfloor ramps

This ramp is designed to be safe to use with any size of workfloor, with an integral joining strip to ensure that it stays in position and a ribbed surface for better grip.

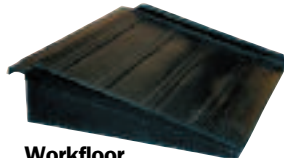

Workfloor ramp

2 Drum Workfloor

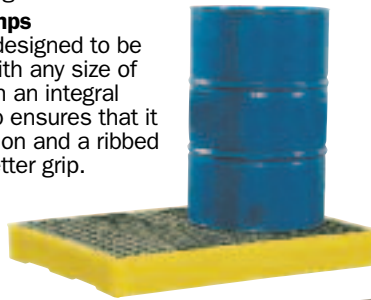

4 Drum Workfloor



Product Number	Dimensions (cm)	Capacity (ltr)	Order Code SOL-741	Price/1 RND
SW-2	126 x 86 x 15	120	-6410A	4946.00
SW-4	166 x 126 x 15	240	-6420B	6260.00
SWR-1	65 x 80 x 16	-	-6520R	3626.00

### Drum Trays Complete With Grate

Suitable for the safe storage of 20ltr drums. Non-slip removable grates and durable construction. Contents not included.



**NEW**

Product Number	Dimensions (cm)	Capacity (ltr)	Order Code SOL-741	Price/1 RND
SGST-20	60 x 40 x 15	20	-5680M	1463.10
SGST-30	80 x 40 x 15	30	-5681N	1717.60
SGST-40	80 x 60 x 15	40	-5682P	2087.30

### Circular Drum Tray

Where there is only one drum in use in an area, the Oil Storage Regulations state that a drum tray with a capacity that is 25% of the size of the drum is sufficient. This 100% polyethylene circular tray meets the requirement. It is also ideal as a temporary bund for smaller items during maintenance operations, including batteries.

Drum not included



Product Number	Dimensions (cm)	Sump (ltr)	Order Code SOL-741	Price/1 RND
SOT-8	87 dia x 19	50	-5840T	1829.00

### Drum Funnel

An essential item when filling either a drum or IBC, particularly with waste fluids. Designed to ensure that there are no spills with an integral lid so that the funnel can be left in place when not in use. Fits over the top of a 205ltr drum. Does not rust or corrode.



Product Number	Dimensions (cm)	Order Code SOL-741	Price/1 RND
SF-20L	61 dia x 23	-5650X	1627.00

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**





### 2-Drum Spill Pallet

100% polyethylene construction is resistant to corrosion and the knocks and scrapes of the industrial environment. Fully compliant with all current regulations.



Product Number	Dimensions (cm)	Sump (ltrs)	Order Code <b>SOL-741</b>	Price/1 RND
SDP-2	122 x 82 x 33	250	<b>-5110A</b>	<b>6200.00</b>

### 4-Drum In-Line Spill Pallet


Use this spill pallet where space is at a premium. The unique design allows for the drums to be stored length wise along a wall while still complying with the regulations. Tough 100% polyethylene construction.



Product Number	Dimensions (cm)	Sump (ltrs)	Order Code <b>SOL-741</b>	Price/1 RND
SDP-4L	249 x 64 x 30	250	<b>-5120L</b>	<b>10305.20</b>

### Drum Racker & Stacker

For safe storage and dispensing applications put one or more of these units in place. The base unit can be used on its own for two drums, or up to two levels of stackers can be used for a maximum storage of six drums. Corrosion resistant 100% polyethylene construction.

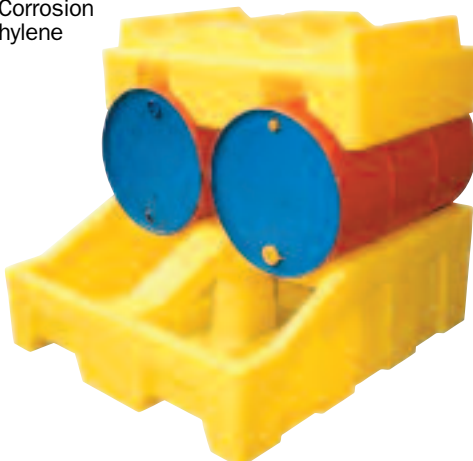

**NEW**

Product Number	Dimensions (cm)	Sump (ltrs)	Order Code <b>SOL-741</b>	Price/1 RND
SDS-B2	139 x 125 x 49	400	<b>-5420B</b>	<b>9919.60</b>
SDS-R2	124 x 79.5 x 37	-	<b>-5420R</b>	<b>5166.20</b>

### 4-Drum Spill Pallet

Compact 4-drum pallet with a low loading height of only 28cm. The sump capacity of 230 litres is large enough to comply with the regulations. 100% polyethylene construction.



Product Number	Dimensions (cm)	Sump (ltrs)	Order Code <b>SOL-741</b>	Price/1 RND
SDP-4	128 x 128 x 28	250	<b>-5120A</b>	<b>6840.00</b>

### All-Weather Spill Pallets

A spill pallet full of rain water does not offer much protection should a drum leak. Where pallets are not kept under a shelter, make use of this unique design complete with dual lockable shutter doors allowing access from both sides. The unit also includes integral ground anchoring points. Available in two drum and four drum versions.



**2 Drum (SPSP-2)**



**4 Drum (SPSP-4)**

**NEW**

Product Number	Dimensions (cm)	Sump (ltrs)	Order Code <b>SOL-741</b>	Price/1 RND
SPSP-2	156 x 110 x 211	250	<b>-5920X</b>	<b>23656.00</b>
SPSP-4	156 x 173 x 211	250	<b>-5921Y</b>	<b>29619.70</b>

### Drum Trolley

This easy to use unit combines safe transport, storage and dispensing from drums all in one. Any spills that occur during dispensing are safely stored in the sump. Simple to use one person operation.



Product Number	Dimensions (cm)	Sump (ltrs)	Order Code <b>SOL-741</b>	Price/1 RND
SDT-230	160 x 74 x 64	250	<b>-5500T</b>	<b>14675.00</b>



## Polyethylene Storage Cabinets

**NEW**



One or more of these cabinets provide a neat and tidy solution to the storage of drums and containers of various sizes up to 205ltr. All sizes are fully weather-resistant and complete with lockable doors and integral sumps. Contents not included.

### SSC-CAB1

Dimensions: 54.5 x 44 x 99cm.



### SSC-CAB2

Dimensions: 65 x 57 x 165cm.



### SSC-CAB5

Dimensions: 72 x 92 x 152cm.



Product Number	Sump (ltr)	Order Code SOL-741	Price/1 RND
SSC-CAB1	30	-6110H	7299.60

Product Number	Sump (ltr)	Order Code SOL-741	Price/1 RND
SSC-CAB2	70	-6120J	11393.10

Product Number	Sump (ltr)	Order Code SOL-741	Price/1 RND
SSC-CAB5	100	-6150M	17232.70

## Single IBC Spill Pallet

This unique design is complete with a bucket space for the splash-proof dispensing of fluids from the IBC. Any type of IBC with an integral pallet can be used.



Product Number	Dimensions (cm)	Sump (ltr)	Order Code SOL-741	Price/1 RND
SSP110	140 x 195 x 73	1100	-6240S	15400.80

## Double IBC Spill Pallet

This is the largest polyethylene spill pallet available, and can be used for a variety of applications including the regulation compliant storage of two 1000ltr IBCs or up to eight 205ltr drums. The strong polyethylene rotationally moulded design ensures that there is no distortion of the side walls when under load.



Product Number	Dimensions (cm)	Sump (ltr)	Order Code SOL-741	Price/1 RND
SSP114	256 x 135 x 51	1140	-6250T	20872.90

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**



**GROUP 742 SPILL CONTROL****Spill Response Kits**

There are many situations where there is a need for a permanent supply of absorbents to be on hand. Solent Plus™ spill kits are a cost-effective answer to this requirement. Available in Maintenance, Oil-only and Chemical kits, they range in capacity from 10ltr up to 240ltr. They are packed with sufficient absorbents to cope with a spill up to the size shown.

**10ltr Kits - In Holdalls**

For quick response to smaller spills.

**Kits contain:**

- 10x pads.
- 1x 1.2m sock.
- 1x 1kg drum plug.
- 2x disposal bags.



Product Number	Format	Order Code SOL-742	Price/1 RND
PMK010B	Maintenance	-6100A	966.60
POK010B	Oil only	-6110B	966.60
PCCK010B	Chemical	-6120C	1230.40

**25ltr Kits - In Small Bins****Kits contain:**

- 17x pads.
- 1x 1.2m sock.
- 2x pillows.
- 4x disposal bags.



Product Number	Format	Order Code SOL-742	Price/1 RND
PMK025A	Maintenance	-6300A	1406.40
POK025A	Oil only	-6310B	1230.40
PCCK025A	Chemical	-6320C	1641.60

**120ltr Kits - In Wheeled Bins****Kits contain:**

- 75x pads.
- 9x 1.2m socks.
- 8x pillows.
- 10x disposal bags.



Product Number	Format	Order Code SOL-742	Price/1 RND
PMK120B	Maintenance	-6350D	4505.60
POK120B	Oil only	-6360E	4482.40
PCCK120B	Chemical	-6370F	5923.60

**15ltr Kits - In Carriers****Kits contain:**

- 10x pads.
- 1x 1.2m sock.
- 1x disposal bags.



Product Number	Format	Order Code SOL-742	Price/1 RND
PMK015B	Maintenance	-6130M	382.40
POK015B	Oil only	-6135N	382.40
PCCK015B	Chemical	-6140P	382.40

**35ltr Kits in Cube Bag****Kits contain:**

- 1x printed cube bag.
- 2x socks (80mm x 3m).
- 15x pads (double weight).
- 1x disposal bag and tie.
- 1x instruction sheet.



Product Number	Format	Order Code SOL-742	Price/1 RND
SMK35Y	Maintenance	-5150S	1701.80
SOK35Y	Oil only	-5160T	1796.30
SCK035Y	Chemical	-5170V	1890.70

**240ltr Kits - In Wheeled Bins****Kits contain:**

- 200x pads.
- 12x socks
- 10x pillows
- 18x disposal bags.



Product Number	Format	Order Code SOL-742	Price/1 RND
PMK240B	Maintenance	-6400G	8349.30
POK240B	Oil only	-6410H	8349.30
PCCK240B	Chemical	-6420J	10494.00

**20ltr Kits - In Holdalls****Kits contain:**

- 15x pads.
- 2x 1.2m socks.
- 3x disposal bags.



Product Number	Format	Order Code SOL-742	Price/1 RND
PMK020C	Maintenance	-6150D	1037.40
POK020C	Oil only	-6160E	966.60
PCCK020C	Chemical	-6170F	1230.40

**50ltr Kits - In Holdalls****Kits contain:**

- 35x pads.
- 3x 1.2m socks.
- 3x pillows.
- 5x disposal bags.



Product Number	Format	Order Code SOL-742	Price/1 RND
PMK050S	Maintenance	-6200G	2109.40
POK050S	Oil only	-6210H	2109.40
PCCK050S	Chemical	-6220J	2450.60

**Audit Spill Kit Covers**

Yellow, weatherproof PVC covers with elasticated cord to allow fitting over the top of a 2-wheeled wheelie bin spill kit. A4 sized clear pouch for inserting audit record sheet. Tamperproof tape fitted on the container and cover indicates whether any of the contents have been used. Depleted spill kits are classified as **ISO14001 non-conformity**. Available in sizes to fit wheelie bins of capacities: 120 and 240ltr.



**EXTENDED RANGE**

Product Number	To Fit 2 Wheeled Bin Size	Order Code SOL-742	Price/1 RND
AVC 120	120ltr	-5440V	632.80
AVC 240	240ltr	-5540V	358.10



## Spill Depot

**NEW**

**PADS  
& ROLLS SUPPLIED  
SEPARATELY**

The perfect way to store and dispense absorbents. Made from quality industrial polyester powder-coated steel.

### Single Bay - MSD41

Can be wall mounted or use as an add-on unit.

**Dimensions:** 60 x 45 x 60cm.



### 3 Part Unit - MSD43

**Dimensions:**  
60 x 45 x 187cm.



### 3 Part Unit with Cabinet - MSD45

**Dimensions:**  
60 x 45 x 187cm.



### 3 Part Unit with Cabinet - MSD47

Made from polyethylene.  
**Dimensions:**  
55 x 55 x 135cm.



### 3 Part Unit - MSD46

Made from powder-coated steel.

**Dimensions:**  
73 x 64 x 152cm.



### 2 Part Unit - MSD42

**Dimensions:**  
60 x 45 x 127cm.



Product Number	Product	Order Code SOL-742	Price/1 RND
MSD41	Single Bay	-8329G	2268.00
MSD42	2 Part	-8330H	5033.80
MSD43	3 Part	-8331J	7550.70
MSD45	3 Part c/w Cabinet	-8332K	8720.20

Product Number	Product	Order Code SOL-742	Price/1 RND
MSD46	3 Part	-8333L	5742.10
MSD47	3 Part c/w Cabinet	-8334M	5742.10

## Polyurethane Drain Covers

Designed for multiple applications. Dual hardness laminated polyurethane construction. Compatible with oils, fuels, solvents and most chemicals.



Product Number	Dimensions (cm)	Colour	Order Code SOL-741	Price/1 RND
SDC464P	46 x 46	Yellow/Orange	-3026A	1143.80
SDC616P	61 x 61	Yellow/Orange	-3030D	7527.50
SDC919P	91 x 91	Yellow/Orange	-3050F	4463.60
SDC616C	61 x 61	Clear	-3039C	2012.60

## Single-Use Clay Drain Covers

Made from chemically inert clay, that will not react to or with any chemical. Extremely malleable for use on an uneven surface - will mould itself to the ground. For single-use only. Can be carried on vehicles as part of an ADR kit. Hessian netting runs through the product to afford maximum strength. Supplied poly wrapped to enhance the storage life.

**Pack of 2.**



Product Number	Dimensions (cm)	Order Code SOL-741	Price/1 RND
SDC614	65 x 45	-3020C	4879.40

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**






### 'Natural' Absorbents from Sustainable Resources

Rather than relying on a non-renewable resource such as polypropylene for their construction, this all new range of absorbent pads, rolls and socks from Solent Plus™ utilises raw materials that are constituted 80% cellulose fibre in their manufacture. Cellulose fibres are one of the most widely available sustainable resources and have a low dependence on fossil fuels. All of the products are available in either maintenance or oil-only grades, and represent a viable, cost-effective alternative to traditional melt-blown absorbents. The performance is equal to, if not better in some cases than conventional absorbents. Of particular note here is the oil pad, which has a class-beating absorbency rating of up to 1.4ltr per pad.

#### 'Natural' Pads

PACK OF  
**100**

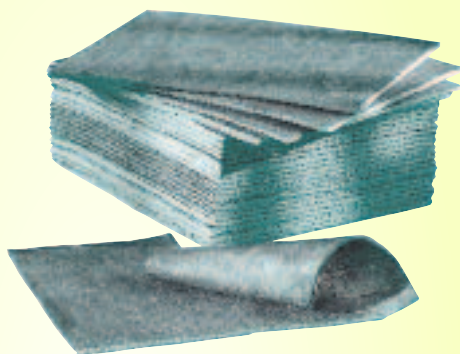

Dimensions (cm x cm)	Format	Pack Quantity	Absorbs (ltr)	Order Code <b>SOL-742</b>	Price/Pk <b>RND</b>
48 x 38	Maintenance	100	0.8	<b>-4510K</b>	<b>1216.20</b>
48 x 38	Oil only	100	1.4	<b>-4550P</b>	<b>1146.90</b>

#### 'Natural' Socks

PACK OF  
**20**



Dimensions (cm x m)	Format	Pack Quantity	Absorbs (ltr)	Order Code <b>SOL-742</b>	Price/Pk <b>RND</b>
7.5 x 1.2	Maintenance	20	4.0	<b>-4530M</b>	<b>1146.90</b>
7.5 x 1.2	Oil only	20	4.0	<b>-4570R</b>	<b>1146.90</b>

#### 'Natural' Rolls



Dimensions (cm x m)	Format	Pack Quantity	Absorbs (ltr)	Order Code <b>SOL-742</b>	Price/1 <b>RND</b>
37 x 38	Maintenance	1	62.0	<b>-4520L</b>	<b>1133.70</b>

### Absorbent Socks

Make use of socks where liquids need to be contained. Particularly useful for putting round the base of machinery and in food stores around the base of freezers (use the maintenance grade). Colour-coded for ease of selection. Oil-only socks repel water and only absorb oil and fuels.



Product Number	Dimensions (cm x m)	Format	Pack Quantity	Absorbs (ltr)	Order Code <b>SOL-742</b>	Price/Pk <b>RND</b>
PMS812	7.5 x 1.2	Maintenance	20	5.0	<b>-4170N</b>	<b>1459.20</b>
PMS830	7.5 x 3.0		8	12.5	<b>-4180P</b>	<b>1353.70</b>
POS812	7.5 x 1.2	Oil only	20	4.0	<b>-4470X</b>	<b>1494.00</b>
POS830	7.5 x 3.0		8	10.0	<b>-4480Z</b>	<b>1494.00</b>
PCS812	7.5 x 1.2	Chemical	20	4.0	<b>-4770H</b>	<b>1634.80</b>
PCS830	7.5 x 3.0		8	10.0	<b>-4780K</b>	<b>1634.80</b>

### Absorbent Booms

Use to contain oil or fuel spills on water. The fill is hydrophobic, which means that they repel water while absorbing oils and fuels. Will stay afloat on water even when saturated with oil. Use the clips and rings to join more than one boom together for larger spills. Convenient 3m length for ease of handling.



PACK OF  
**4**

Product Number	Dimensions (cm x m)	Format	Pack Quantity	Absorbs (ltr)	Order Code <b>SOL-742</b>	Price/Pk <b>RND</b>
SB0123	13 x 3	Oil only	4	30.0	<b>-0820J</b>	<b>4633.10</b>
SB0203	20 x 3	Oil only	4	80.0	<b>-0840L</b>	<b>966.60</b>

### Absorbent Pillows

These absorbent pillows are particularly useful for coping with persistent leaks that require more than the absorbent capacity offered by pads. Can be left in place under machinery.



EXTENDED  
RANGE

PACK OF  
**16**

Product Number	Dimensions (cm x cm)	Format	Pack Quantity	Absorbs (ltr)	Order Code <b>SOL-742</b>	Price/Pk <b>RND</b>
SMC303	38 x 23	Maintenance	16	4.5	<b>-2610F</b>	<b>2111.80</b>
SOC303	38 x 23	Oil only	16	3.5	<b>-2620G</b>	<b>3236.80</b>
SCC303	38 x 23	Chemical	16	3.5	<b>-2600E</b>	<b>830.40</b>

**SOLENT+  
SPILL CONTROL** **Absorbent  
Pads**

Solent Plus™ absorbent pads are available in two thicknesses, medium or light and are suitable for use anywhere that fluids have leaked or spilt. Simple colour-coding makes selection easy. For most indoor applications use grey/black. These will absorb most fluids, including oils, fuels, solvents, coolants, water and foodstuffs such as milk or wine. If there's a possibility of aggressive fluids such as acids or alkalis being spilt, use the yellow ones. Where an oil or fuel spill is likely outdoors, it's best to put the white ones in place. These repel water while absorbing the oils and fuels.

**Maintenance Absorbent Pads**  
Size: 50cm x 40cm




Product Number	Format	Pack Qty	Absorbs (ltr)	Order Code SOL-742	Price/Pk RND
PMP503	Med	100	0.80	-4010J	1388.50
SMP504	Light	200	0.50	-2860K	2400.20
SMP501	Light	50	0.50	-2850J	796.50

**Oil Only Absorbent Pads**  
Size: 50cm x 40cm



Product Number	Format	Pack Qty	Absorbs (ltr)	Order Code SOL-742	Price/Pk RND
POP100	Med	100	0.80	-4310R	1283.10
SOP200	Light	200	0.65	-3360S	2175.20
SOP501	Light	50	0.65	-3420H	597.60

**Chemical Only Absorbent Pads**  
Size: 50cm x 40cm

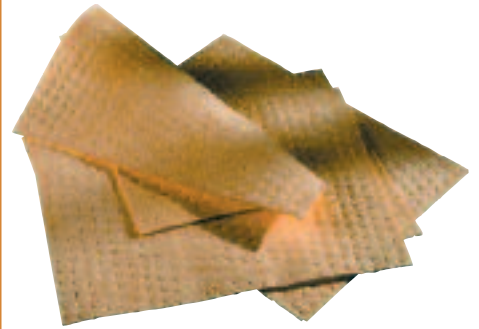

Product Number	Format	Pack Qty	Absorbs (ltr)	Order Code SOL-742	Price/Pk RND
PCP504	Med	100	0.80	-4610A	1504.60
SCP505Y	Light	200	0.50	-2780C	1009.50
SCP506Y	Light	50	0.50	-2790D	343.10

**Absorbent Rolls**


Many applications for absorbents can be met by making use of one or more of these rolls. All sizes and weights are perforated for economy of use.



Product Number	Dimensions (cm x m)	Format	Pack Quantity	Absorbs (ltr)	Order Code SOL-742	Price/1 RND
PMR505	50 x 40	Maint./Med	1	80	-4100C	1458.70
PMR905	90 x 40	Maint./Med	1	144	-4110L	2672.10
POR130	50 x 40	Oil only/Med	1	80	-4400T	1283.10
POR260	90 x 40	Oil only/Med	1	144	-4410V	2461.20
PCR484	50 x 40	Chemical/Med	1	80	-4700C	1509.10
PCR905	90 x 40	Chemical/Med	1	144	-4710D	2359.80

**Absorbent Drum Top Covers**

Cut to fit exactly on the top of a 205ltr drum, these covers help keep a dispensing area free of leaks and drips. Each cover will absorb up to 1ltr of most industrial fluids.

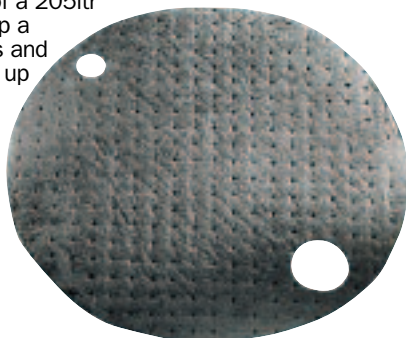


**PACK OF  
5**

Product Number	Dimensions Diameter	Format	Pack Quantity	Absorbs (ltr)	Order Code SOL-742	Price/Pk RND
MPA5656	56cm	Maintenance	5	1.0	-0620B	510.60

**Tough Stuff Pads & Rolls**

Following on from the success of the Solent Plus absorbents are these all-new 'ToughStuff' pads and rolls. Featuring a unique three-layer construction, these products offer the very best of absorbent technology that is available today. Sandwiching a high loft filling of 100% polypropylene absorbent fibres there is a spun bond coverstock to the top for better wear resistance and a fine fibre

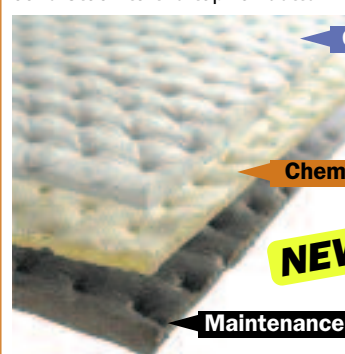

coverstock to the underside for a low lint finish that doesn't impede the speed of absorbency. Pads and rolls both utilise the same construction and are available in maintenance, oil only or chemical grades with the same colour coding as all the other absorbents in the Solent Plus spill control range.

Type	Size	Pack Quantity	Order Code SOL-742	Price/Pk RND
<b>Maintenance Grade</b>				
Pad	500 x 400mm	100	-4810M	1071.00
Roll	500mm x 40m	1	-4820N	1071.00
<b>Oil Only Grade</b>				
Pad	500 x 400mm	100	-4850Q	1006.10
Roll	500mm x 40m	1	-4860R	1006.10
<b>Chemical Grade</b>				
Pad	500 x 400mm	100	-4890S	1135.80
Roll	500mm x 40m	1	-4900T	1135.80

**Clay Absorbent Granules**

These traditional absorbent clay granules absorb oil, water and most other fluids. Non-toxic, chemically inert. 20ltr.



Bag Size	Order Code SOL-742	Price/1 RND
20ltr	-8250A	136.50

**PRODUCTS ARE ONLY AVAILABLE VIA YOUR DISTRIBUTOR**